
MILITARY SPECIFICATION SHEET

INSULATORS, STANDOFF
(STYLE 28)

The complete requirements for procuring the insulators described herein shall consist of this document and the latest issue of Specification MIL-I-23264.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

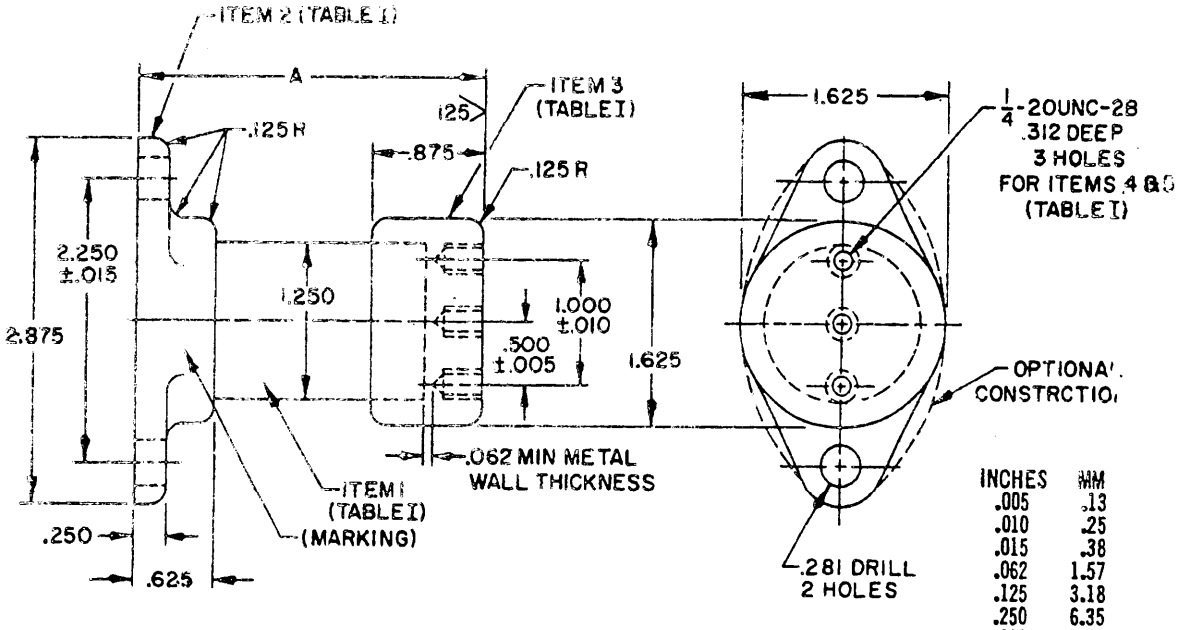

INCHES	MM
.005	.13
.010	.25
.015	.38
.062	1.57
.125	3.18
.250	6.35
.281	7.14
.312	7.92
.500	12.70
.625	15.88
.875	22.23
1.000	25.40
1.250	31.75
1.625	41.28
2.250	57.15
2.875	73.03

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. For bolt-head clearance at mounting holes, the minimum radius of flat area measured from center of hole shall be 9/32.

FIGURE 1. Style 28 standoff insulator

FSC 5970

Source: https://assist.dla.mil -- Downloaded: 20260-19T16:06Z
Check the source to verify that this is the current version before use.

TABLE I. Item description.

Item No.	Description	Material	No. per assembly
1	Insulator	Ceramic, grade 422 or better, per MIL-I-10	1
2	Base	Brass, composition 1, hard, per QQ-B-637; or brass, class A, per QQ-B-621; or bronze, composition 1, per QQ-[illegible]-225	1
3	Cap		1
4	Round head machine screw, 1/4-20UNC-2A, 3/8 in. long, per MS35214	Brass	1
5	Lockwasher per MS35338-101		3

TABLE II. Type designation.

Type designation	Dimension A 1/
NL422B28-024 NL422W28-024	3.000 ± .031 (76.20 .79)
NL422B28-032 NL422W28-032	4.000 ± .031 (101.60 .79)
NL422B28-048 NL422W28-048	6.000 ± .062 (152.40 1.57)
NL422B28-064 NL422W28-064	8.000 ± .062 (203.20 1.57)
NL422B28-080 NL422W28-080	10.000 ± .062 (254.00 1.57)
NL422B28-096 NL422W28-096	12.000 ± .062 (304.80 1.57)

1/ Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 Millimeters are in parentheses.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:06Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions: See figure 1, table I, and table II.

Tolerances:
Ceramic - Unless otherwise specified, the tolerances for ceramic parts shall be as specified in table IV of MIL-I-23264.
Metal - Unless otherwise specified, the tolerance for metal parts shall be ±.020 inch.

Component parts:
Ceramic parts - Ceramic per MIL-I-10 shall be grade 422 or better.
Metal parts - Unless otherwise specified, all bearing and exposed metal surfaces shall be machine finished to 125/.

Cantilever, tensile, and torque: The average minimum ultimate loads shall be as specified in table III. The torque shall be applied to the cap with the insulator mounted by its base-retaining screws.

TABLE III. Average (ultimate loads).

Type designation	Cantilever (pounds)	Tensile (pounds)	Torque (inch-pounds)
NL422B28-024 NL422W28-024	240	900	1,200
NL422B28-032 NL422W28-032	170	900	1,200
NL422B28-048 NL422W28-048	100	900	1,200
NL422B28-064 NL422W28-064	75	900	1,200
NL422B28-080 NL422W28-080	60	900	1,200
NL422B28-096 NL422W28-096	50	900	1,200

Custodians:
Army - EL
Navy - EC
Air Force - 85

Review activities:
Army - EL, MI, MU
Navy - SH, EC
Air Force - 85
DSA - ES

User activities:
Army - ME
Navy - MC, AS
Air Force -

Preparing activity:
Navy - EC

(Project 5970-0156)

Revision letters are not used to indicate changes due to the extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 20260-19T16:06Z
Check the source to verify that this is the current version before use.