MILITARY SPECIFICATION SHEET

INSULATORS, STANDOFF
(STYLE 29)

The complete requirements for procuring the insulators described herein shall consist of this document and the latest issue of Specification MIL-I-23264.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

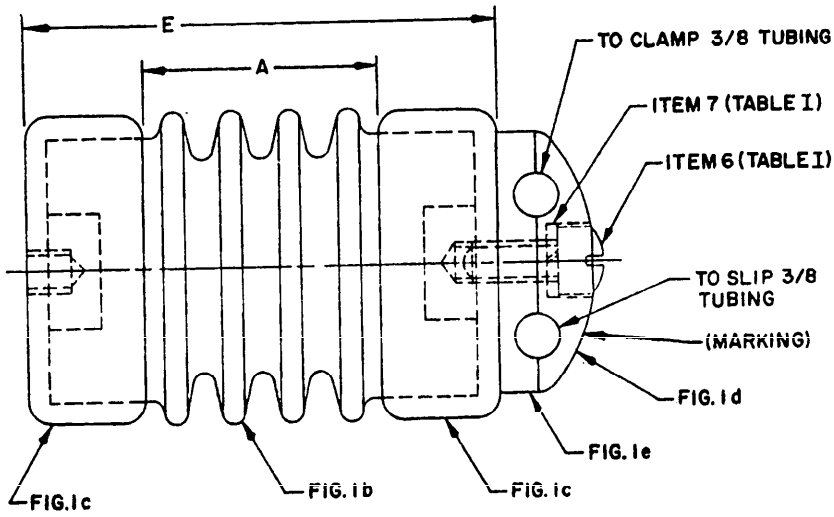


FIGURE 1a. Standoff insulator assembly

INCHES	MM
.093	2.36
.250	6.35
1.812	46.02
2.687	68.25


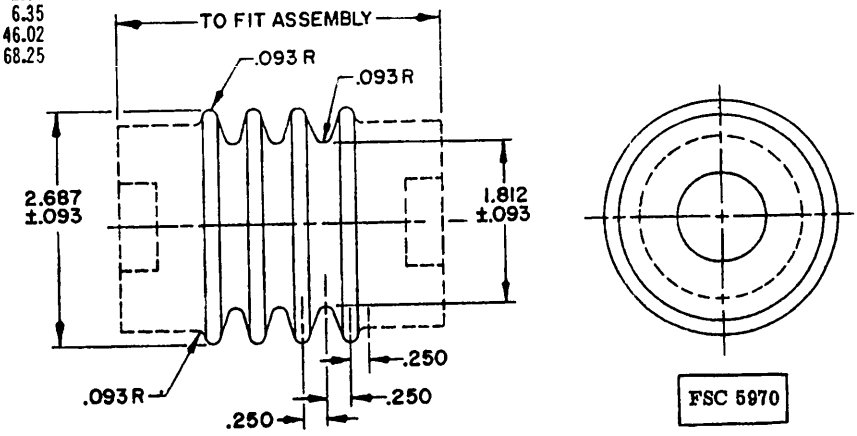


FIGURE 1b. Insulator.
(Item 1 Table I)

FIGURE 1. Style 29 standoff insulator.

Source: https://assist.dla.mil -- Downloaded: 20261O-19T16:07Z
Check the source to verify that this is the current version before use.

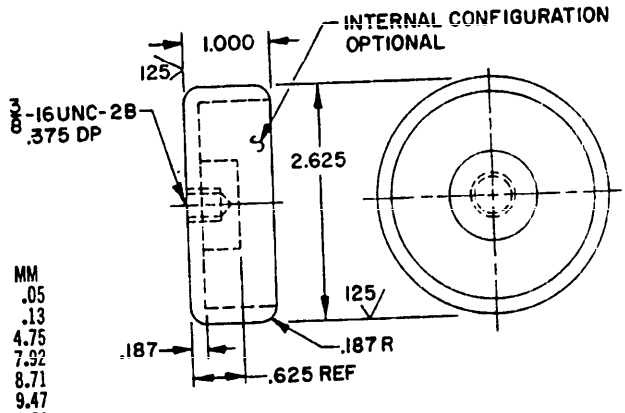

INCHES	MM
.002	.05
.005	.13
.187	4.75
.312	7.92
.343	8.71
.373	9.47
.375	9.53
.377	9.58
.390	9.91
.468	11.89
.562	14.27
.625	15.88
.656	16.66
1.000	25.40
2.250	57.15
2.625	66.68

FIGURE 1c. Base and top.
(Item 2 and 3, Table I)

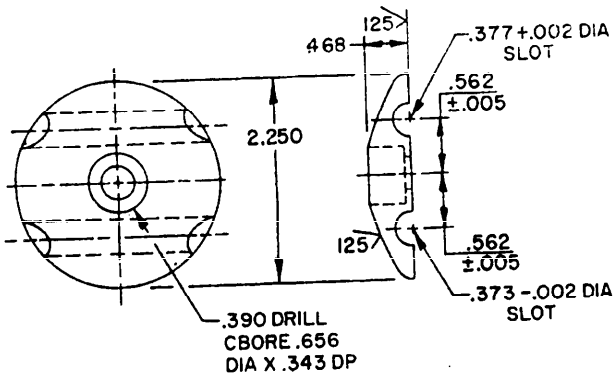


FIGURE 1d. Upper cap.
(Item 4, Table I)

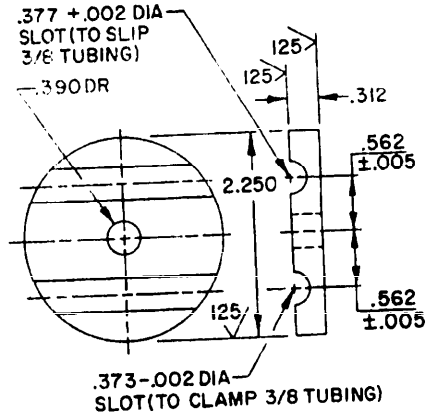


FIGURE 1e. Lower cap.
(Item 5, Table I)

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

FIGURE 1. Style 29 standoff insulator - (Continued)

Source: https://assist.dla.mil -- Downloaded: 20260-19T16:07Z
Check the source to verify that this is the current version before use.

TABLE I. Item description.

Item No.	Description	Material	No. per assembly
1	Insulator	Ceramic, grade 222 or better, per MIL-I-10	1
2	Base	Brass, composition 1, hard, per QQ-B-637; or brass, class A, per QQ-B-621; or bronze, composition 1, per QQ-L-225	1
3	Top		1
4	Upper cap		1
5	Lower cap		1
6	Fillister-head machine screw, 3/8-16UNC-2A, 3/4 in. long, per MS35273-109		1
7	Lockwasher per MS35338-103		1

TABLE II. Type designation.

Type designation	Dimensions 1/	
	A	E
NL222B29-034 NL222W29-034	2.000 (50.80)	4.000 (101.60)
NL222B29-050 NL222W29-050	4.000 (101.60)	6.000 (152.40)

1/ Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4. Millimeters are in parentheses.

REQUIREMENTS:

Dimensions: See figure 1, table I, and table II.

Tolerances:
Ceramic - Unless otherwise specified, the tolerances for ceramic parts shall be as specified in table IV of MIL-I-23264.
Metal - Unless otherwise specified, the tolerance for metal parts shall be ±.020 inch.

Component parts:
Ceramic parts - Ceramic per MIL-I-10 shall be grade 222 or better.
Metal parts - Unless otherwise specified, all bearing and exposed metal surfaces shall be machine finished to 125/.

Cantilever: The average ultimate cantilever load shall be 1,500 pounds, minimum, for the 4-inch length, and 900 pounds, minimum, for the 6-inch length.

Source: https://assist.dla.mil -- Downloaded: 20260-19T16:07Z
Check the source to verify that this is the current version before use.

Tensile: The average ultimate tensile load shall be 2,000 pounds, minimum.

Torque: The average ultimate torque strength shall be 750 inch-pounds, minimum.

Custodians:
Army - EL
Navy - EC
Air Force - 85

Review activities:
Army - EL, MI, MU
Navy - SH, EC
Air Force - 85
DSA - ES

User activities:
Army - ME
Navy - MC, AS
Air Force -

Preparing activity:
Navy - EC

(Project 5970-0157)

Revision letters are not used to indicate changes due to the extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:07Z
Check the source to verify that this is the current version before use.