
MILITARY SPECIFICATION SHEET

INSULATORS, FEEDTHRU
(STYLE 30)

The complete requirements for procuring the insulators described herein shall consist of this document and the latest issue of Specification MIL-I-23264.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

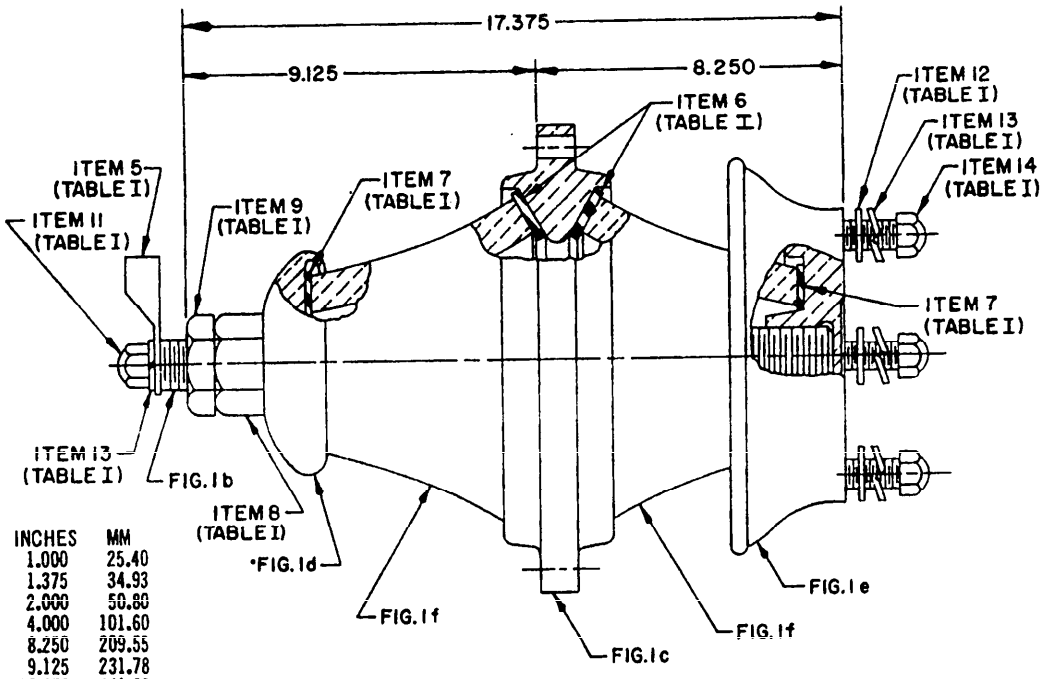

INCHES	MM
1.000	25.40
1.375	34.93
2.000	50.80
4.000	101.60
8.250	209.55
9.125	231.78
17.375	441.33
18.000	457.20

FIGURE 1a. Feedthru insulator assembly.

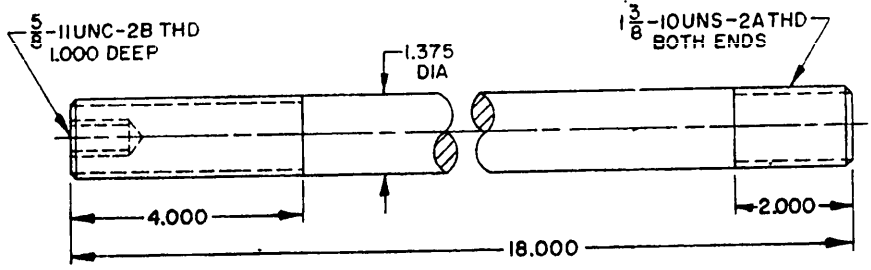


FIGURE 1b. Anchor rod.
(Item 10, Table I)

FIGURE 1. Style 30 feedthru insulator.

FSC 5970

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:07Z
Check the source to verify that this is the current version before use.

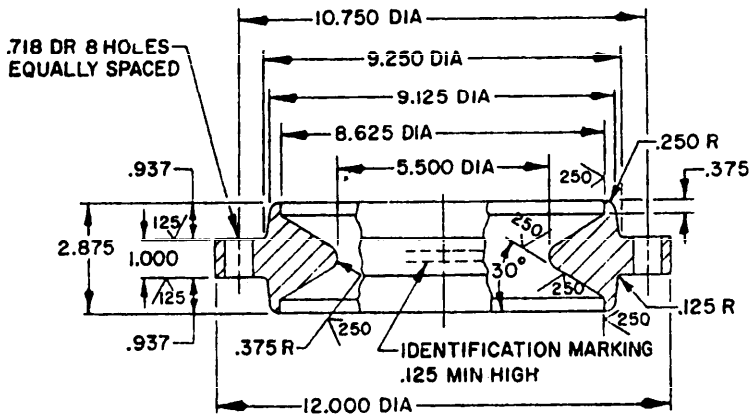


FIGURE 1c. Flange.
(Item 4, Table I)

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.125	3.18	.718	18.24	1.562	39.67	5.500	139.70	9.250	234.95
.187	4.75	.937	23.80	1.687	42.85	5.750	146.05	10.750	273.05
.250	6.35	1.000	25.40	1.750	44.45	8.625	219.08	12.000	304.80
.375	9.53	1.187	30.15	2.875	73.03	9.125	231.78	40.000	1016.00
.562	14.27	1.500	38.10	5.000	127.00				

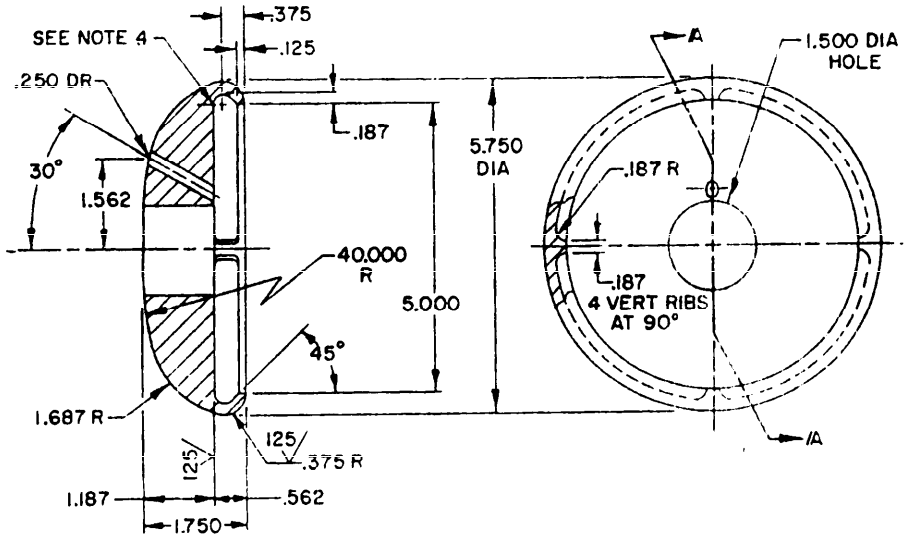


FIGURE 1d. Cap, lower.
(Item 2, Table I)

FIGURE 1. Style 30, feedthru insulator. (Continued)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:07Z
Check the source to verify that this is the current version before use.

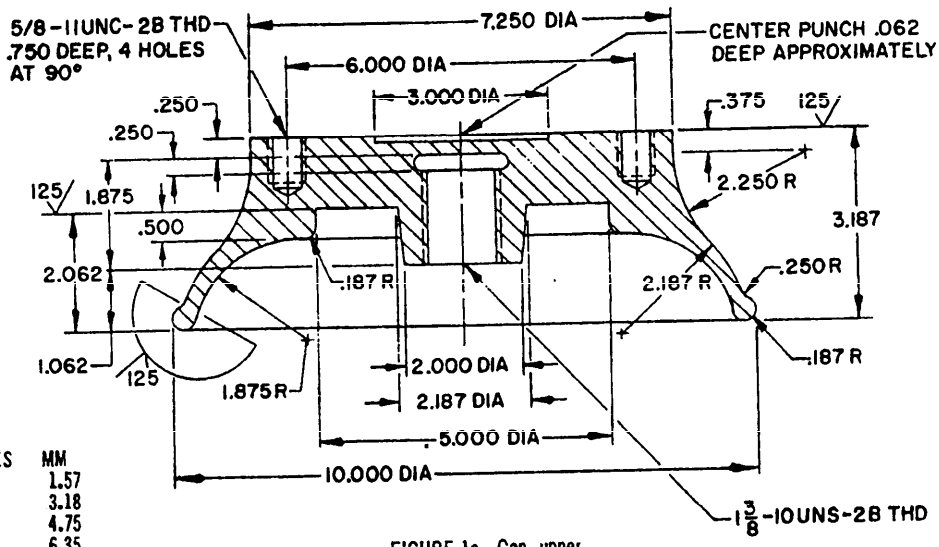


FIGURE 1e. Cap, upper.
(Item 3, Table I)

INCHES	MM
.062	1.57
.125	3.18
.187	4.75
.250	6.35
.375	9.53
.500	12.70
.750	19.05
.875	22.23
1.000	25.40
1.062	26.97
1.875	47.63
2.000	50.80
2.062	52.37
2.187	55.55
2.250	57.15
2.562	65.07
2.750	69.85
3.000	76.20
3.187	80.95
3.812	96.82
4.500	114.30
4.562	115.87
4.875	123.83
5.000	127.00
5.312	134.92
5.437	138.10
5.875	149.23
6.000	152.40
6.125	155.58
6.937	176.20
7.250	184.15
7.812	198.42
8.062	204.77
10.000	254.00

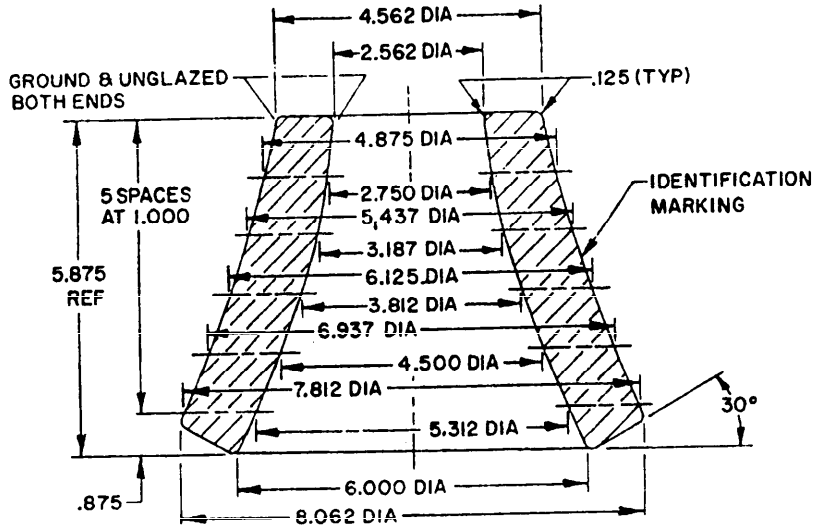


FIGURE 1f. Insulator, bowl.
(Item 1, Table I)

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Prior to shipment, the hexagon nut shall be tightened with sufficient pressure to keep insulation bowls intact. The pressure applied shall not cause serious deformation to the gaskets.
4. Machine finish corner square.

FIGURE 1. Style 30 feedthru insulator. (Continued)

Source: https://assist.dla.mil -- Downloaded: 202610-19T16:07Z
Check the source to verify that this is the currentversion before use.

TABLE I. Item description.

Item No.	Description	Material	No. per assembly
1	Insulator bowl	Ceramic, grade 222 or better, per MIL-I-10	2
2	Cap, lower	Bronze per QQ-B-726	1
3	Cap, upper		1
4	Flange		1
5	Terminal lug, Amp Inc. #35669 or equal	Copper, hot electro tinned	1
6	Gasket, 8.625 OD, 5.500 ID, 0.125 THK, ± 0.005	Rubber, type 1, class 2, per MIL-G-1149	2
7	Washer, 4.937 OD, 2.250 ID, 0.125 THK, ± 0.005	Copper, soft annealed, per QQ-C-576	2
8	Hexagon nut, 1-3/8-10UNS-2B	Brass per QQ-B-637; cadmium plated, type II, class C, per QQ-P-416	1
9	Hexagon jam nut, 1-3/8-10UNS-2B		1
10	Anchor rod	Brass per QQ-B-637	1
11	Hexagon-head cap screw, 5/8-11UNC-2A, 1 in. long, per MS35309-158	Cadmium plated, type II, class C, per QQ-P-416	1
12	Washer per MS15795-820		4
13	Lockwasher per MS35338-145 or -164		5
14	Hexagon-head cap screw, 5/8-11UNC-2A, 1-1/2 in. long, per MS35307-462		4

TABLE II. Type designation.

Type designation	Dimensions
NL222B30-139	See figure 1

Source: https://assist.dla.mil -- Downloaded: 20260-19T16:07Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions: See figure 1 and table I.

Tolerances:
Ceramic - Unless otherwise specified, the tolerances for ceramic parts shall be as specified in table IV of MIL-I-23264.
Metal - Unless otherwise specified, the tolerance for metal parts shall be ± .020 inch. Tolerance on angles shall be ± 1°.

Component parts:
Ceramic parts - Ceramic per MIL-I-10 shall be grade 222 or better.
Metal parts - Unless otherwise specified, all bearing and exposed metal surfaces shall be machine finished to 125/.

Cantilever: Insulators shall have the 1-3/8 - inch diameter hexagon nut tightened with sufficient pressure to elongate the anchor rod 0.018 inch. The jam nut shall then be tightened and the insulator flange shall be bolted to a rigid steel frame. An ultimate cantilever load of 100,000 inch-pounds, minimum, shall be applied at 90 degrees to the axis of the insulator and at the end of a 100-inch lever arm.

Custodians:
Army - EL
Navy - EC
Air Force - 85

Review activities:
Army - EL, MI, MU
Navy - SH, EC
Air Force - 85
DSA - ES

User activities:
Army - ME
Navy - MC, AS
Air Force -

Preparing activity:
Navy - EC

(Project 5970-0158)

Revision letters are not used to indicate changes due to the extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 202610-19T16:07Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:07Z
Check the source to verify that this is the current version before use.