INCH-POUND

A-A-58065A
20 July 2001
SUPERSEDING
A-A-58065
11 June 1996

COMMERCIAL ITEM DESCRIPTION

MOUNTER-DEMOUNTER, PNEUMATIC TIRE, STATIONARY

The General Services Administration has authorized the use of this commercial item description (CID) for all federal agencies.

1. SCOPE. This Commercial Item Description (CID) covers a stationary, hydraulic motor driven mounter-demounter for tube-type or tubeless tires used on trucks, busses, tractors, and earth moving equipment.

2. CLASSIFICATION.

2.1 Type.

2.1.1 Type I. The Type A mounter-demounter shall accommodate tube and tubeless tires up to 76 inches in diameter and rims from 15 to 38 inches in diameter to a maximum width of up to 34 inches.

2.1.2 Type II. The Type B mounter-demounter shall accommodate tube and tubeless tires up to 83 inches in diameter and rims from 15 to 44 inches in diameter to a maximum width of up to 40 inches.

3. SALIENT CHARACTERISTICS

3.1 Design and construction. The mounter-demounter shall be an electro-hydraulic type. The mounter-demounter shall be designed to in the field by personnel of average mechanical skill.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data that may improve this document should be sent to: WR-ALC/TILCC, 420 Second Street, Suite 100, Robins AFB, GA 31098-1640.

AMSC N/A FSC 4910

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:00Z
Check the source to verify that this is the current version before use.

3.2 Features. The mounter-demounter shall have an adjustable or mobile control console that allows for one person operation. The mounter-demounter shall have an adjustable pressure regulator and gauge to match chuck pressure to rim size. A portable ramp or tire lifting device shall be included to maneuver tires on and off the mounter-demounter.

3.3 Jaws. The jaws shall rotate clockwise and counter clockwise. The jaws shall not open if hydraulic pressure drops.

3.4 Clamping chuck. The clamping chuck shall be hydraulically controlled and self-centering to the appropriate rim size.

3.5 Controls. The mounter-demounter shall be capable of having all operations controlled by a single control console. The control console shall have a dedicated lever or control device for each power operation and shall be of the "deadman" type.

3.6 Noise. The mounter-demounter shall not, under any operating condition exceed 84 dBA (slow scale) measured not more than four feet from the perimeter of the unit.

3.7 Electrical power requirements. The power requirements of this mounter-demounter shall be at least 110 volts, single phase, 30 amps. The electrical system shall include a resetable breaker or thermal overload protection device.

3.8 Life. The operational life of the mounter-demounter shall be at least twenty years.

3.9. Corrosion resistance. The mounter-demounter shall be corrosion resistant.

3.10 Maintainability. A minimum number of parts and tools shall be required to maintain the mounter-demounter during its life cycle. The electric motor, hydraulic pump, and drive assembly shall be enclosed to prevent environmental contamination. Removable panels shall be a part of the design to afford access to the electric motor and hydraulic pump and drive assembly.

3.11 Finish. The mounter-demounter shall be finished to the manufacturers best commercial practice.

3.12 Accessories. The mounter-demounter shall include all the necessary tools, adapters, and attachments. Operation and repair parts manuals shall be furnished as specified in the contract.

4. REGULATORY REQUIREMENTS

4.1 Safety. The mounter-demounter shall comply with Federal OSHA requirements in effect as of the date of the contractual document. The Federal OSHA regulations shall take precedence in the event of conflict with state or local OSHA regulations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:00Z
Check the source to verify that this is the current version before use.

4.2 The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

5. QUALITY ASSURANCE PROVISIONS

5.1 Product Conformance. The mounter-demounter provided shall meet the salient characteristics of this CID, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same unit offered for sale in the commercial market. The government reserves the right to require proof of such conformance by requesting contractor data that meets para. 4.3. The inspection requirements set forth in the contract document shall be applicable to this CID.

5.2 Inspection requirements and testing.

5.2.1 Classification of tests. The inspection and testing of the mounter-demounter shall be conducted in accordance with paragraphs 3.1 through 3.7.

5.2.2 Tire change test. A truck tire shall be changed in order to ensure that the mounter-demounter complies with paragraphs 3.1 through 3.7.

5.2.3 Noise test. The mounter-demounter shall be tested to demonstrate that the noise level of the operating unit meets the noise limit specified by para 3.7.

6. PACKAGING. Preservation, packing, and marking shall be as specified in the contract or order.

7. NOTES.

7.1 Ordering data. Procurement documents must specify the title, number and date of this CID and must specify the type of the mounter-demounter to be procured.

7.2 Part or Identification Number. The following part or identification numbering procedure is for government purposes only and does not constitute a requirement for the contractor.

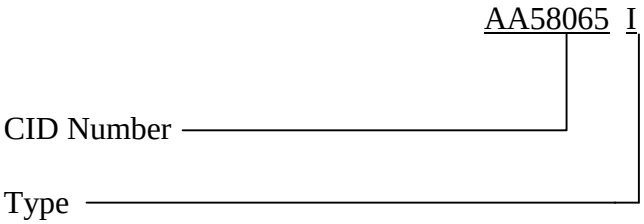

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:00Z
Check the source to verify that this is the current version before use.

7.3 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within specified tolerances using conversion tables contained in the latest revision of Federal Standard 376 and all other requirements of this CID are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch/pound units, a request should be made to the contracting officer to determine if the product is acceptable. The contracting officer has the option of accepting or rejecting the product.

7.4 National stock number (NSN), part number and cage number of units that meet the requirements of this CID:

Type I:	Type 2:
NSN 4910-01-330-1479	NSN 4910-01-375-2487
PN H.I.T. 5000	PN H.I.T. 9000
CAGE 57791	CAGE 57791

Custodian:
Army – AR
Navy - YD
DLA - CC

Preparing Activity:
Air Force – 84

Agent:
Air Force – 99

Project Number 4910-0850

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:00Z
Check the source to verify that this is the current version before use.