MIL-F-15919D(SHIPS)
8 November 1971
SUPERSEDING
MIL-F-15919C(SHIPS)
9 July 1964
(See 6.4)

MILITARY SPECIFICATION

FILTERS, AIR, ACTIVATED CARBON, SUBMARINE

SANITARY TANK VENT AND WATER CLOSET

1. SCOPE

1.1 Scope. This specification covers filters, air, activated carbon for submarine sanitary tank vent and water closet service.

1.2 Classification. Air filters shall be of the following types as specified (see 6.2):

Type I - Sanitary tank vent air filter, cylindrical.
Type II - Water closet space air filter, cylindrical.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL
QQ-S-766 - Steel, Plates, Sheets and Strip -- Corrosion Resisting.

MILITARY
MIL-R-900 - Rubber Gasket Material, 45 Durometer Hardness For Moderately Low Temperature Service.
MIL-D-1000 - Drawings, Engineering and Associated List.
MIL-D-1000/2 - Drawings, Engineering and Associated List.
MIL-P-15024 - Plates, Tags and Bands for Identification of Equipment.
MIL-P-15024/5 - Plates, Identification.
MIL-R-20092 - Rubber, Sheets And Molded Shapes, Cellular, Synthetic Open Cell (Foamed Latex).
MIL-A-22985 - Adhesive, Metal Identification Plate.

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

UNIFORM CLASSIFICATION COMMITTEE
Uniform Freight Classification Rules

(Application for copies should be addressed to the Uniform Classification Committee, 202 Union Station, 516 West Jackson Boulevard, Chicago, Illinois 60606).

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

3.1 Materials. Materials shall be in accordance with the applicable specifications listed in 2.1. Any deviation from the materials in the applicable specifications shall be approved by the command or agency concerned.

3.2 Canisters. Canisters for the filters furnished under this specification shall consist of two uniformly perforated concentric cylinders constructed of 0.025 inch thick corrosion-resisting steel, conforming to class 316, condition A, 2B finish of QQ-S-766. The perforated area shall be not less than 30 percent open. The circular perforations shall

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:07Z
Check the source to verify that this is the current version before use.

have a diameter of not more than 0.045 inch. The perforated area shall extend to 1/2 inch or less from the top edge of the cylinders. The cylinders shall be securely fastened by welding, lock seaming, riveting, or other jamming method to the base plate (see 3.4.2 and 3.5.2) as approved by the command or agency concerned.

3.2.1 Canister cap. Removable canister caps with fastenings, which can be readily removed for renewing the carbon contents, shall be provided for securing the cap to the canister.

3.3 Filter bed gasket. A soft rubber filter bed gasket approximately 1 inch thick uncompressed shall be cemented on to the inside annular surface of the canister cap. The gasket shall be made of foamed latex synthetic rubber equivalent to type II, class 1, of MIL-R-20092, firm condition. The gasket shall maintain uniform compression on the carbon bed.

3.4 Type I, sanitary tank vent air filter.

3.4.1 Size and shape. The type I air filter shall conform in size and shape to the dimensions shown on figure 1.

3.4.2 Base plate. The base plate shall be not less than 0.035 inch in thickness and shall have a central throat opening not less than 3 inches in diameter, as indicated on figure 1. The central opening shall be covered with 8 mesh screen. The base plate shall be provided with means for securing the canister to the mounting, as approved by the command or agency concerned.

3.4.3 Filter bed. The filter bed shall have a volume of not less than 0.45 cubic feet.

3.4.4 Ring gasket. A ring gasket not less than 1/8 inch thick shall be provided to fit between the filter and the filter mounting. The gasket shall be made of synthetic rubber in accordance with MIL-R-900.

3.5 Type II, water closet space air filter.

3.5.1 Size and shape. The type II air filter shall conform in size and shape to the limiting dimensions shown on figure 2.

3.5.2 Base plate. The base plate shall be not less than number 16 gage (0.0598 inch) thick.

3.5.3 Companion flange. The companion flange shall be not less than number 11 gage (0.115 inch) thick.

3.5.4 Ring gasket. A gasket not less than 1/8 inch thick, made of synthetic rubber in accordance with MIL-R-900, shall be provided to be used between the base plate and companion flange.

3.5.5 Filter bed. The filter bed shall have a volume of not less than 0.05 cubic feet.

3.6 Drawings. Drawings delineating the equipment shall be type II drawings of MIL-D-1000/2 and shall cover the information specified in categories A, B, G, H and J of MIL-D-1000.

3.6.1 Assembly drawings. Assembly drawings shall show clearly the details of design and construction and shall identify each part and its location. Parts shall be identified in accordance with the numbers used in the list of material. The drawing shall show overall dimensions and tolerances. Such additional information, not required herein, shall be included on the drawing to reflect compliance with the specification requirements for the equipment.

3.6.2 Certification data. Certification data shall be furnished for purchasing activities approval. Drawing(s) shall be in accordance with type III of MIL-D-1000/2.

3.7 Identification plates. An identification plate in accordance with MIL-P-15024 and MIL-P-15024/5 shall be furnished and installed on each filter canister. The identification plate shall contain the following information:

(a) Manufacturer's name.
(b) Type and name of filter.

Source: https://assist.dla.mil -- Downloaded: 202640-18T08:07Z
Check the source to verify that this is the current version before use.

(c) Rated carbon volume.
(d) Contract or order number.
(e) Federal stock number.
(f) Brief instructions for recharging the canister.

3.7.1 The federal stock number shall be assigned on request to the command or agency concerned.

3.7.2 Identification plates shall be attached by spot welding as shown on figures 1 and 2 or with the use of an adhesive in accordance with MIL-A-22895, class A.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Sampling for quality conformance inspection.

4.2.1 Lot. All filters of the same type offered for delivery at one time shall be considered a lot for purposes of examination.

4.2.2 Sampling for examination. A sample number of filters of the same type shall be selected at random from each lot of material, for the examination specified in 4.3, with lot acceptance as specified in table I.

Table I - Sampling for examination AQL (approx.) = 1.5 percent defective.

Number of filters in lot	Number of filters in sample	Acceptance number defective	Rejection number defective
1 to 15	All	-	-
16 to 110	15	0	1
111 to 300	25	0	1
301 to 800	35	1	2
801 to 1300	50	2	3

4.3 Examination. Each filter selected in accordance with 4.2.2, shall be examined to verify conformance to all the requirements of this specification.

4.4 If any sample is found to be not in conformance with the requirements of this specification, the entire lot shall be rejected.

4.5 Inspection of preparation for delivery. The packaging, packing and marking shall be inspected for compliance with section 5 of this document.

5. PREPARATION FOR DELIVERY

(The preparation for delivery requirements specified herein apply only for direct Government procurements. For the extent of applicability of the preparation for delivery requirements of referenced documents listed in section 2, see 6.3.)

5.1 Domestic shipment and early equipment installation and for storage of onboard repair parts.

5.1.1 Filters.

5.1.1.1 Preservation and packaging. Ppreservation and packaging which may be the supplier's commercial practice, shall be sufficient to afford adequate protection against corrosion, deterioration and physical damage during shipment from the supply source to the using activity and until early installation.

Source: https://assist.dla.mil -- Downloaded: 202640-18T08:07Z
Check the source to verify that this is the currentversion before use.

5.1.1.2 Packing. Packing shall be accomplished in a manner which will insure acceptance by common carrier at the lowest rate and will afford protection against physical or mechanical damage during direct shipment from the supply source to the using activity for early installation. The shipping containers or method of packing shall conform to the Uniform Freight Classification Rules or other carrier regulations, as applicable to the mode of transportation and may conform to the supplier's commercial practice.

5.1.1.3 Marking. Shipment marking information shall be provided on interior packages and exterior shipping containers in accordance with the contractor's commercial practice. The information shall include nomenclature, federal stock number or manufacturer's part number, contract or order number, contractor's name and destination.

5.2 Domestic shipment and storage or overseas shipment. The requirements, and levels of preservation, packaging, packing and marking for shipment shall be specified by the procuring activity (see 6.2).

6. NOTES

6.1 Intended use. The filters covered by this specification are intended for sanitary tank vents and water closet service on submarines.

6.2 Ordering data. Procurement documents should specify the following:


(a) Title, number, and date of this specification.
(b) Type required (see 1.2).
(c) Preservation, packaging, packing and marking requirements other than those required by 5.1 (see 5.2).


6.3 Sub-contracted material and parts. The preparation for delivery requirements of referenced documents listed in section 2 do not apply when material and parts are procured by the supplier for incorporation into the equipment and lose their separate identity when the equipment is shipped.

6.4 CHANGES FROM PREVIOUS ISSUE. THE OUTSIDE MARGINS OF THIS DOCUMENT HAVE BEEN MARKED "#" TO INDICATE WHERE CHANGES (DELETIONS, ADDITIONS, ETC.) FROM THE PREVIOUS ISSUE HAVE BEEN MADE. THIS HAS BEEN DONE AS A CONVENIENCE ONLY AND THE GOVERNMENT ASSUMES NO LIABILITY WHATSOEVER FOR ANY INACCURACIES IN THESE NOTATIONS. BIDDERS AND CONTRACTERS ARE CAUTIONED TO EVALUATE THE REQUIREMENTS OF THIS DOCUMENT BASED ON THE ENTIRE CONTENT AS WRITTEN IRRESPECTIVE OF THE MARGINAL NOTATIONS AND RELATIONSHIP TO THE LAST PREVIOUS ISSUE.


Preparing activity:
Navy - SH
(Project 4460-N014)

Source: https://assist.dla.mil -- Downloaded: 202610-18T08:07Z
Check the source to verify that this is the current version before use.

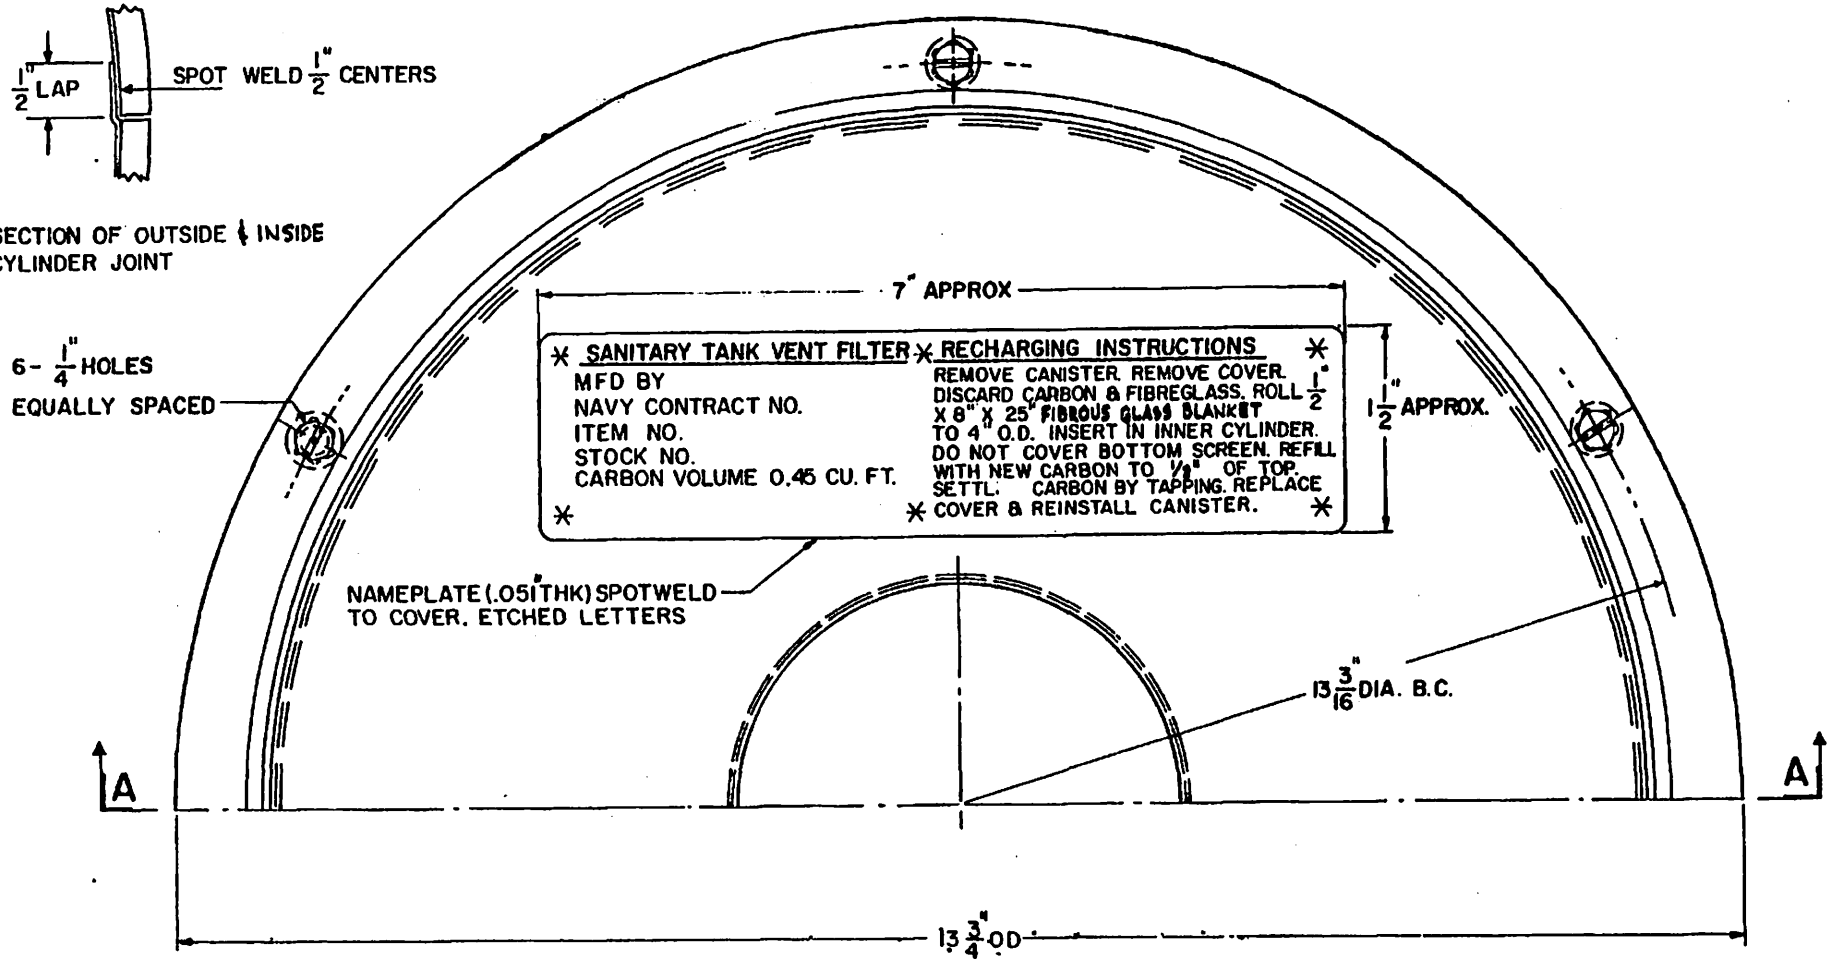

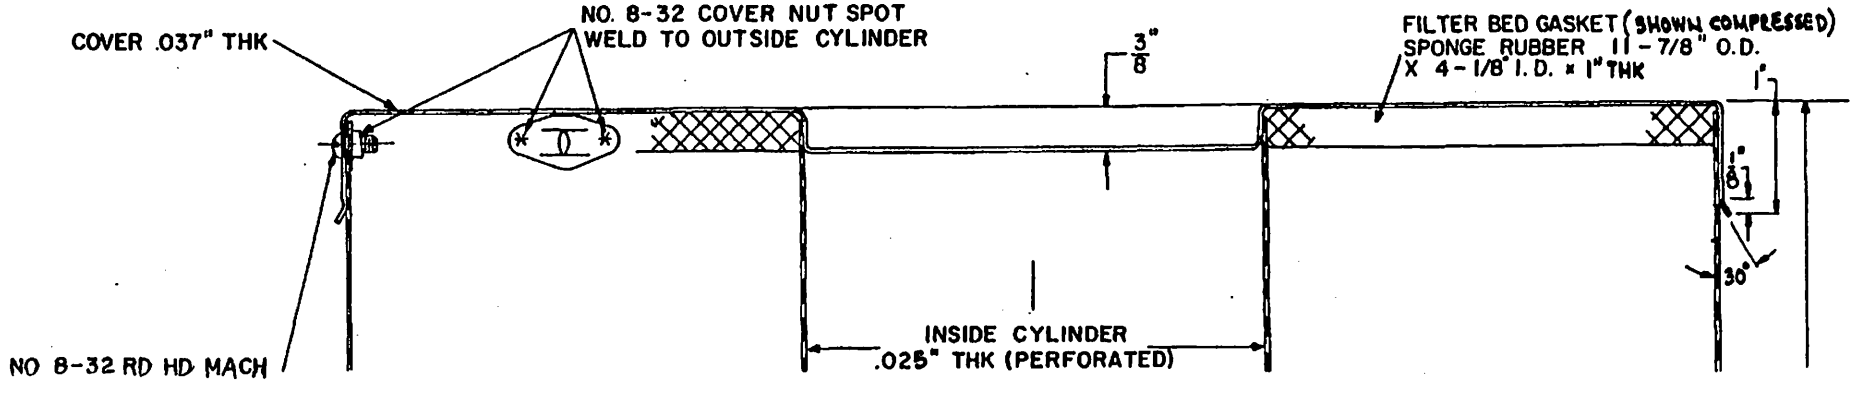

Source: https://assist.dla.mil -- Downloaded: 202640-18T08:07Z
Check the source to verify that this is the current version before use.

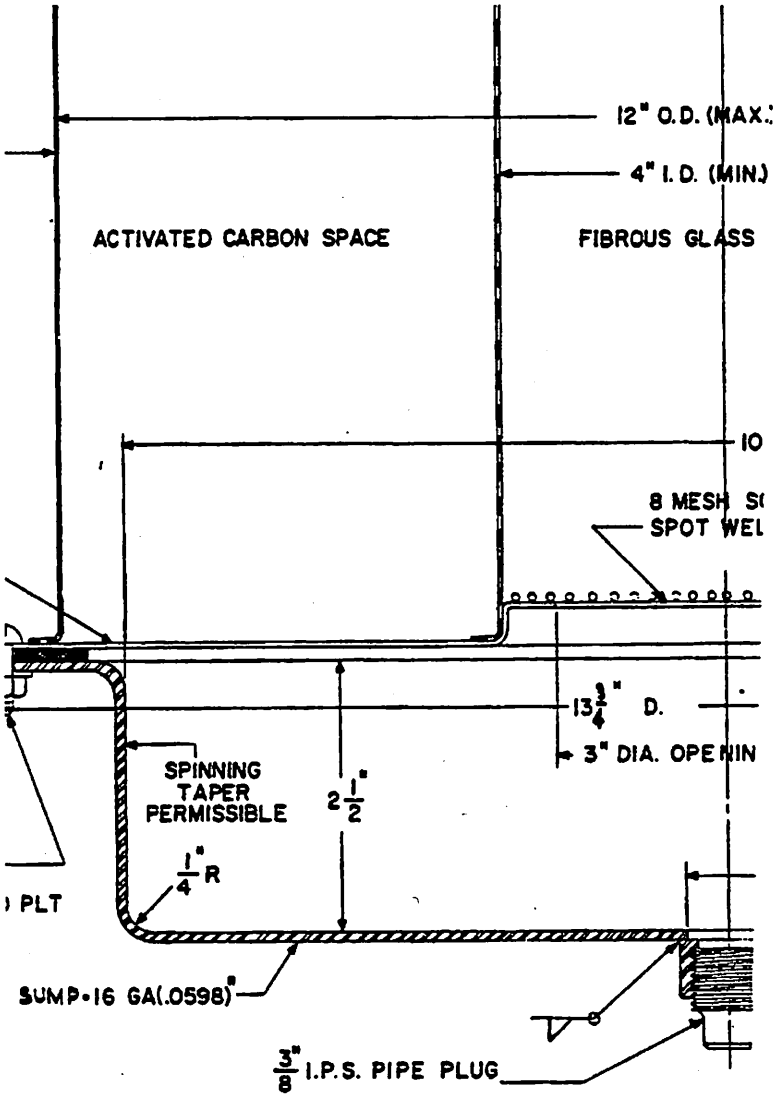


SECTION

ALL MATERIAL TO BE STAINLESS STEEL UNI

FIGURE 1 - SANITARY TANK VE

Source: https://assist.dla.mil -- Downloaded: 202640-18T08:07Z
Check the source to verify that this is the currentversion before use.

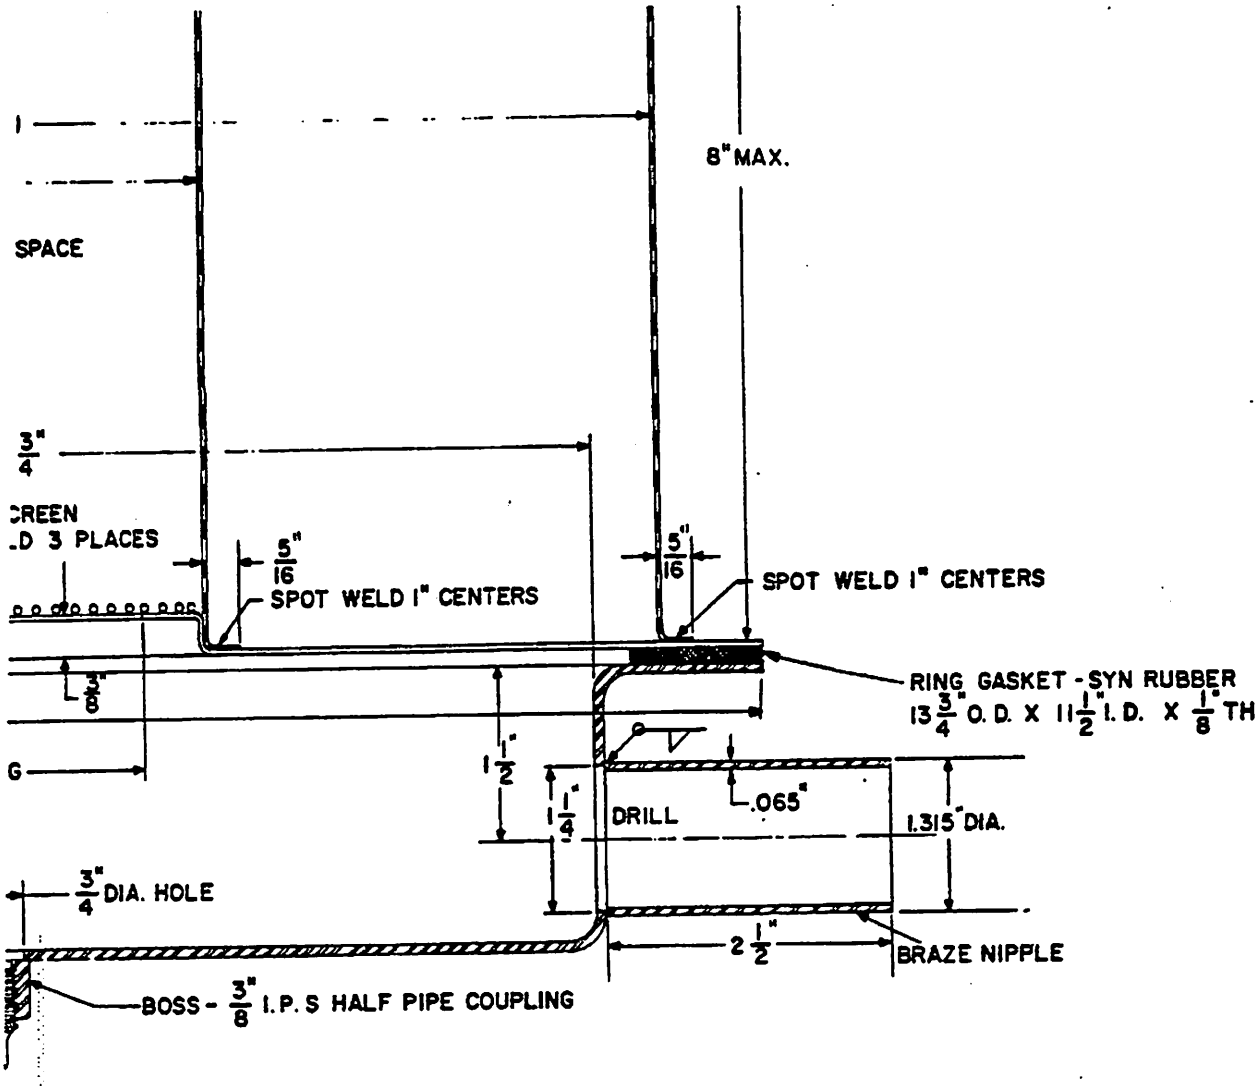

A-A

LESS OTHERWISE SPECIFIED

ENT FILTER

Source: https://assist.dla.mil -- Downloaded: 202610-18T08:07Z
Check the source to verify that this is the current version before use.


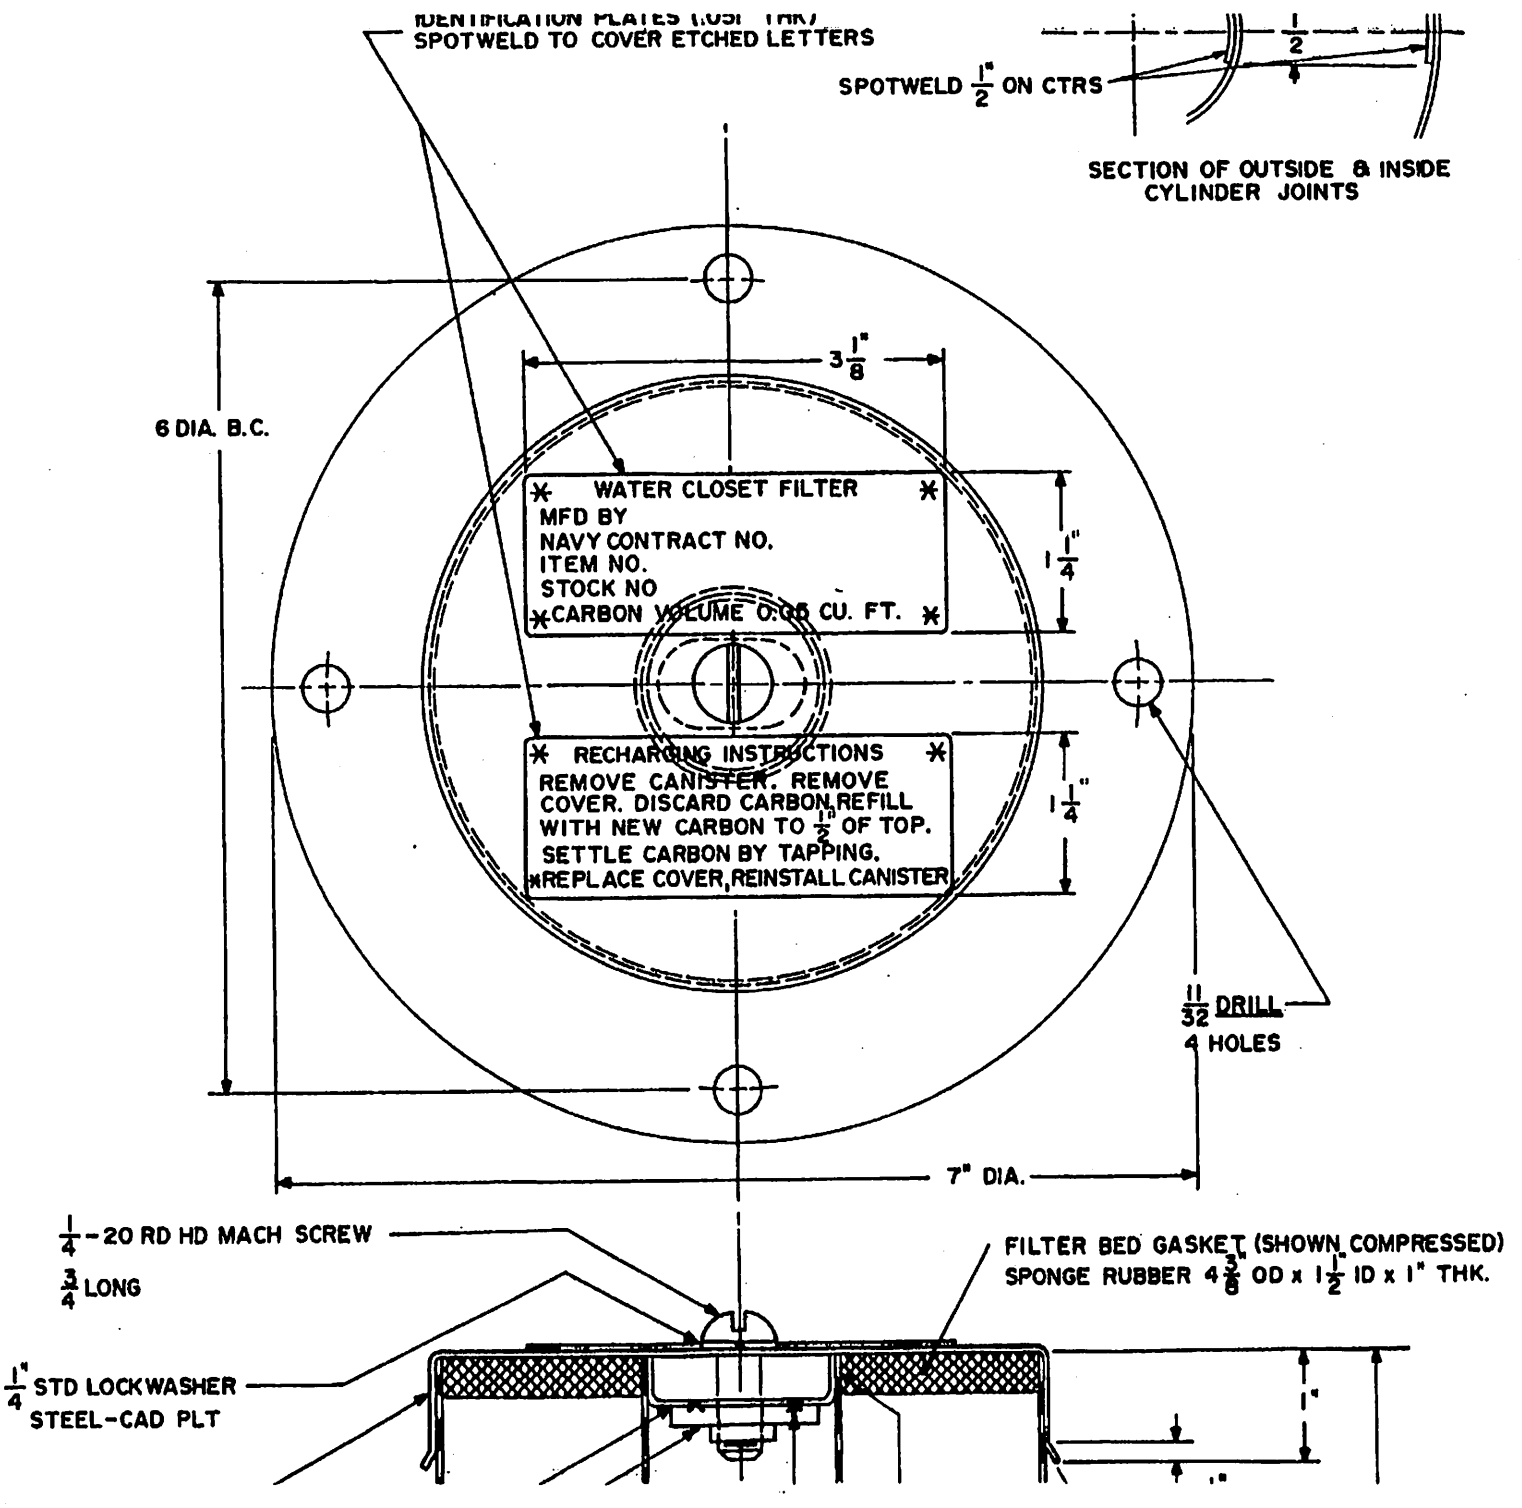


Figure 2 - Wa

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:07Z
Check the source to verify that this is the current version before use.

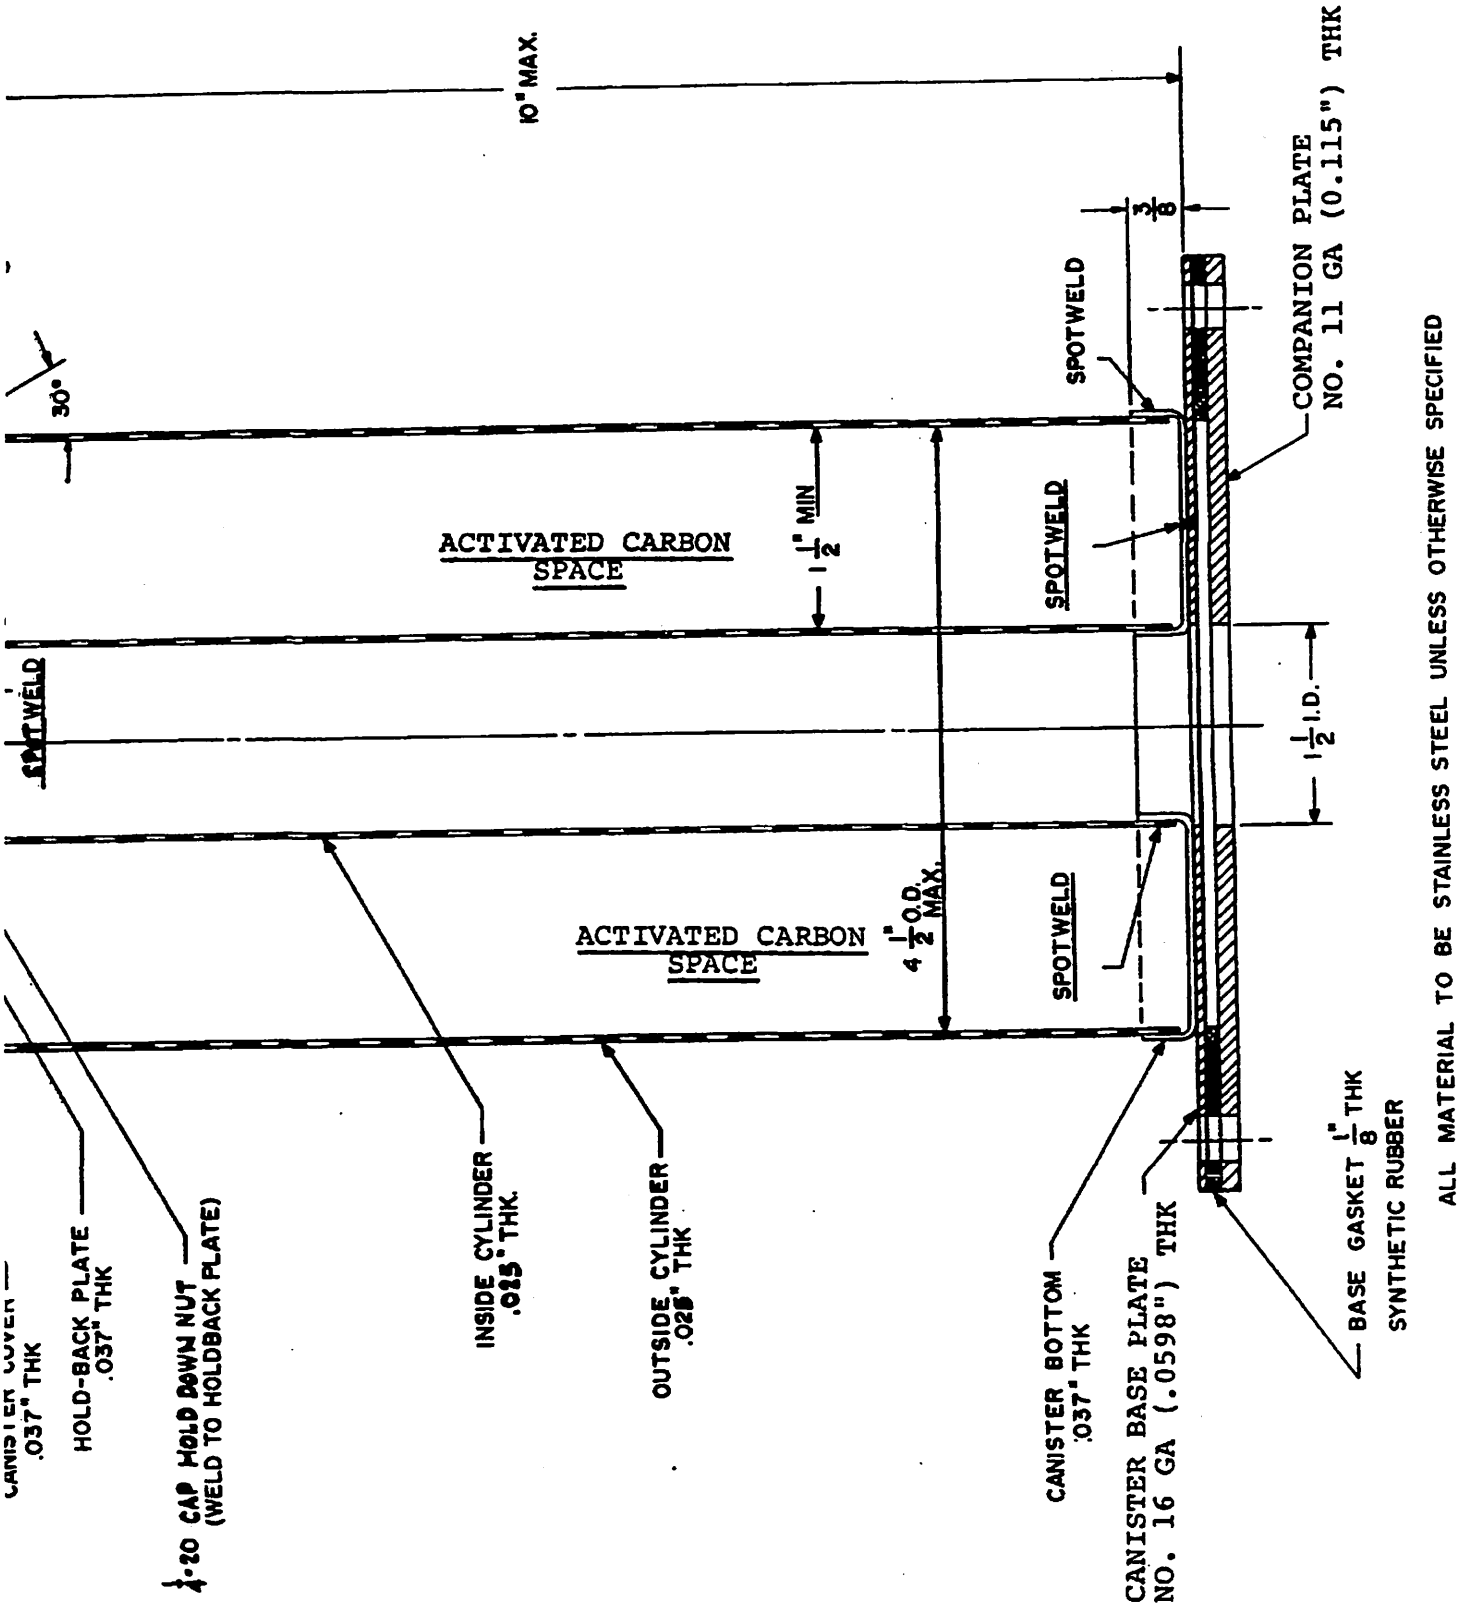

ercloset space filter.

Source: https://assist.dla.mil -- Downloaded: 202610-18T08:07Z
Check the source to verify that this is the current version before use.