MIL-P-15877D(SHIPS)
29 June 1973
SUPERSEDING
MIL-H-15877C(SHIPS)
29 June 1961
(See 6.5)

MILITARY SPECIFICATION

PIPE SUPPORT DEVICES (HANGERS AND SWAYBRACES, SHIPBOARD USE)

1. SCOPE

1.1 Scope. This specification covers constant support, variable support pipe hangers, and swaybraces for shipboard piping.

1.2 Classification. Hangers and swaybraces for piping shall be of the following types and classes as specified (see 6.2):

Type I - Constant support hangers.
  Class 1 - Coil spring.
  Class 2 - Belville spring.
Type II - Variable support hangers.
  Class 1 - Long coil spring.
  Class 2 - Normal coil spring.
  Class 3 - Short coil spring.
  Class 4 - Belville spring.
    Style A - 1/2 inch deflection.
    Style B - 1 inch deflection.
    Style C - 1-1/2 inch deflection.
Type III - Swaybraces.
  Class 1 - Coil spring.
  Class 2 - Belville spring.
  Class 3 - Hydraulic snubber.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of the specification to the extent specified herein.

SPECIFICATIONS

FEDERAL
  VV-D-1078 - Damping Fluid, Silicone Base (Dimethyl Polysiloxane).
  PPP-B-601 - Boxes, Wood, Cleated-Plywood.
  PPP-B-621 - Boxes, Wood, Nailed and Lock-Corner.
  PPP-B-636 - Boxes, Shipping, Fiberboard.
  PPP-B-640 - Boxes, Fiberboard, Corrugated, Triple Wall.

MILITARY
  MIL-P-116 - Preservation, Methods of.
  MIL-R-196 - Repair Parts for Internal Combustion Engines, Packaging of.
  MIL-S-901 - Shock Tests, H.I. (High-Impact); Shipboard Machinery, Equipment and Systems, Requirements For.
  MIL-D-1000 - Drawings, Engineering and Associated Lists.
  MIL-D-1000/2 - Drawings, Engineering And Associated Lists.
  MIL-M-15071 - Manuals, Technical: Equipments And Systems Content Requirements For.
  MIL-P-19834 - Plates, Identification, Metal Foil, Adhesive Backed.
  MIL-B-22191 - Barrier Materials, Transparent, Flexible, Heat Sealable.

STANDARDS

MILITARY
  MIL-STD-105 - Sampling Procedures And Tables For Inspection By Attributes.
  MIL-STD-129 - Marking For Shipment And Storage.
  MIL-STD-750 - Packaging Procedures For Submarine Repair Parts, Utilizing Transparent, Flexible, Heat Sealable Film.
  MIL-STD-1186 - Cushioning, Anchoring, Bracing, Blocking, And Waterproofing; With Appropriate Test Methods.

FSC 5340

Source: https://assist.dla.mil -- Downloaded: 202610-18T08:06Z
Check the source to verify that this is the current version before use.

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

UNIFORM CLASSIFICATION COMMITTEE
Uniform Freight Classification Rules.

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606.)

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INCORPORATED, AGENT
National Motor Freight Classification.

(Application for copies should be addressed to the National Motor Freight Traffic Association, Inc., Agent, 1616 P Street, N.W., Washington, D.C. 20036.)

3. REQUIREMENTS

3.1 Sample for first article inspection. Prior to beginning production a sample shall be tested as specified in 4.2 (see 6.3).

3.2 Description.

3.2.1 The type I constant support hangers shall consist of an enclosed spring, compensating lever arm to obtain the constant support feature, and upper and lower attachment points.

3.2.2 The type II variable support hangers shall consist of an enclosed spring and upper and lower attachment points. The enclosed spring may be partially exposed along a slot for the purpose of providing an indicator arm alongside the spring or load scale.

3.2.3 The type III swaybraces shall consist of an enclosed double acting spring and attachment points on each end of the swaybrace. The hydraulic type shall consist of a piston, cylinder, and hydraulic reservoir, and shall have attachment points on both ends of the swaybrace. Hydraulic fluid shall be in accordance with VV-D-1078, 200 centistokes.

3.3 Materials. Magnesium and magnesium alloys shall not be used. In general, cast iron and aluminum alloys will not be permitted for structural parts. Load carrying spring caps may be cast of ductile iron having an elongation of 12-1/2 percent and a tensile of 50,000 pounds per square inch gage (psig).

3.4 Construction. The design, fabrication, and assembly of spring hangers and swaybraces shall be such that complete release of the piping load will be impossible in the event of a spring failure.

3.5 Factors of safety. With the exception of springs, all parts of the equipment shall have a minimum factor of safety of five based on the ultimate strength of the materials used.

3.5.1 Types I and II hangers shall be capable of supporting an overload of at least 150 percent of its minimum maximum load without evidence of failure.

3.6 Springs. Springs shall be designed with a safe working stress for the type of spring material used and the service involved.

3.7 Rods. The minimum rod size shall be 5/8-inch diameter, when rods are required (see 6.2).

3.8 Screw adjustments. All threaded members of screw adjustments shall have a true and complete depth of thread. The turnbuckle or adjusting nut shall have all its full length of thread in service while in use, and the amount of adjustment shall be plainly visible at all times. All screw or equivalent adjustments shall be provided with suitable locking features and indicating means to identify these settings.

Source: https://assist.dla.mil -- Downloaded: 20260-18T08:06Z
Check the source to verify that this is the current version before use.

3.9 Heat conductance. The equipment shall be designed to reduce the heat conducting paths from piping to a minimum.

3.10 Designation and marking.

3.10.1 Identification plates. Identification plates shall be of a material satisfactory to the activity concerned. They shall be fixed to each spring hanger and swaybrace. Plates shall be attached to a part of the equipment which will not ordinarily be renewed during its normal service life, and shall be located in a readily accessible position where easily read. Identification plates may be attached by drive screws, rivets, tack weld or adhesive. If adhesive backed plates are used, they shall conform to type II of MIL-P-19834.

3.10.1.1 Data. Data on the identification plates shall include the following items:

(a) Manufacturer's name, model number, serial number and size of hanger.
(b) Load setting (pounds) (where applicable, see 6.2).
(c) Installation location or fabrication mark number (see 6.2).
(d) Total travel (type I hangers only).
(e) Blank space for official stamping by the Government inspector.
(f) Hot and cold positions (types I and II hangers only).

3.11 Drawings.

3.11.1 Preliminary drawings. Within 30 days after award of contract, the contractor shall submit to the command or agency concerned preliminary drawings that are sufficient to permit evaluation of the design and materials (see 3.3). These drawings shall be type II, form 3, category A and in accordance with MIL-D-1000 and MIL-D-1000/2, shall show the following:

(a) A sectional assembly of the hanger or swaybrace and details of means for making adjustment.
(b) Bill of material, listing specifications, grade, and condition, or other data adequate to identify the materials proposed.
(c) Dimensions. Overall, accessibility space including disassembly clearances, and all dimensions pertinent to installation.
(c) Notes, design, and performance characteristics, weight, any limitations on installation, and previous approval for shock and vibration, when applicable.

3.11.2 Production drawings. When specified (see 6.2), detail assembly drawings shall be submitted to the command or agency concerned by the contractor for completion of the contract or order. These drawings shall be in accordance with type II, form 3, category P of MIL-D-1000.

3.11.2.1 Resubmission drawings are not required for equipment which has previously been supplied and for which drawings were previously submitted. Reference to the previously submitted drawing, or the furnishing of a copy of the previously submitted drawing (where required by an agency not having the drawing on record) will be acceptable.

3.12 Technical manuals. Technical manuals shall be furnished in accordance with type IV of MIL-M-15071. Technical manuals shall completely describe the operation of the unit and cover installation procedures and instructions for adjustments and maintenance, if required.

3.13 Special tools. The need for special tools shall be avoided wherever possible. When required, special tools or equipment shall be furnished for adjustment, disassembling, and servicing of equipment. Special tools are defined as those tools that are not normally available through regular commercial channels. (The stock list may be consulted in the office of the Government Inspector.)

3.14 Repair parts. Shipboard repair parts are ordinarily not considered necessary for spring hangers and swaybraces. However, the manufacturer shall submit a list of recommended spare parts to the procuring activity for those pipe support devices for which spare parts are deemed necessary.

3.15 Type I constant support hangers.

3.15.1 Constant support hangers shall be of a design that will compensate for the normal variation in supporting force of helical coil springs. The load-travel characteristics shall be such that for a given load setting the maximum deviation of the supporting force from the set value will be not more than 6 percent in one direction for the entire range of travel. The 6 percent shall be a plus value when the load is moving down and a minus value when moving up. Total deviation is the sum of kinematic deviation, manufacturing tolerance, and friction as proven on a tensile test machine.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:06Z
Check the source to verify that this is the current version before use.

3.15.2 All constant support hangers shall be calibrated or adjusted to support the exact load specified (see 6.2). Hangers shall embody suitable means for field adjustment of the load setting through a range of plus or minus 10 percent of the load specified (see 6.2) while maintaining the constant support characteristics. A load adjustment scale shall be provided.

3.15.3 Constant support hangers shall have a travel range at least 1/2 inch in excess of the specified actual thermal movement of the supported load (see 6.2). They shall be provided with a travel scale indicating the position of the supported load.

3.16 Type II, variable support hangers.

3.16.1 Variation in supporting force for type II hangers shall be within the following limits:

(a) Class 1 - Not more than 10 percent of the specified load per 1/2 inch of travel.
(b) Class 2 - Not more than 15 percent of the specified load per 1/2 inch of travel.[1/]
(c) Class 3 - Not more than 30 percent of the specified load per 1/2 inch of travel.
(d) Class 4 - Not more than 10 percent of the specified load for the entire travel range (all styles).

[1/] For special load applications of less than 50 pounds, the variation in supporting force may be up to 70 percent per 1/2 inch of travel.

3.16.2 Variable support hangers shall be provided with a scale indicating the amount of the load and the position in the travel range.

3.16.3 Spring deflection. Total spring deflection for type II hangers shall be as follows:

(a) Class 1 - Not more than 10 inches.
(b) Class 2 - Not more than 5 inches.[1/]
(c) Class 3 - Not more than 2-3/4 inches.
(d) Class 4:
Style A - 1/2 inch.
Style B - 1 inch.
Style C - 1-1/2 inch.

[1/] For special load applications of less than 50 pounds, the total spring deflection shall be not more than 5 inches.

3.17 Type III swaybraces.

3.17.1 Swaybraces shall be so designed that when properly installed in a piping system they shall oppose the motion or vibration of the piping system due to externally applied forces.

3.17.2 Swaybraces shall be capable of providing, along the swaybrace axis, the following minimum movement in each direction from a center position. The center position is defined as that position at which the swaybrace exerts no force upon the piping system:

(a) Class 1 - 2 inches
(b) Class 2 - 1 inch[1/]
(c) Class 3 - 2 inches

[1/] Class 2 swaybraces are also available with 2 inches movement in each direction from center, with a reduced restraining force. They may be utilized within their rated capacity.

3.18 Painting. All hangers and swaybraces shall be thoroughly painted inside and outside to protect all metal parts from corroding in an ocean atmosphere. The manufacturer shall use his standard primer and finishing paints.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the

Source: https://assist.dla.mil -- Downloaded: 202610-18T08:06Z
Check the source to verify that this is the current version before use.

supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 First article inspection. First article inspection shall be conducted at the facilities of the manufacturer or at a laboratory suitable to the Government inspector. One hanger and swaybrace of each type and class to be produced shall be examined and tested as specified in 4.4 and 4.5. All hangers to be tested shall be capable of supporting a 500 pound load. Swaybraces to be tested shall be sized for a 5 inch nominal size pipeline.

4.2.1 Test equipment. The following equipment is needed to conduct first article testing on pipe hangers and swaybraces:

(a) Medium weight H.I. shock machine.
(b) Lightweight H.I. shock machine.
(c) Shock stand for testing pipe hangers. For a suitable stand (see figure 1).
(d) Load weights of assorted sizes. Load weights can be additive to obtain total test loads of 300 and 500 pounds.
(e) Test fixtures for testing swaybraces. For suitable fixtures (see figure 2).
(f) Tensile test machine or equal.

4.2.2 Test data sheet. Test results shall be recorded on a test data sheet similar to that shown on figure 3. Additional sheets of plain white paper may be used to amplify any portion of the results.

4.3 Sampling.

4.3.1 Lot. For purposes of sampling, a lot shall consist of spring hangers or swaybraces of the same type, class, design, and capacity offered for delivery at the same time.

4.3.2 Sampling for visual and dimensional examination. A random sample of spring hangers or swaybraces shall be selected from each lot of material offered for examination of visual and dimensional characteristics with lot acceptance based on sampling inspection requirements in accordance with table I and MIL-STD-105.

Table I - Sampling for visual and dimensional examination AQL (approx) = 2.5 percent defective.

Number of units in lot	Number of units in sample	Acceptance number (defectives)	Rejection number (defectives)
15 and under	7	0	1
16 to 40	10	0	1
41 to 110	15	1	2
111 to 300	25	1	2
301 to 500	35	2	3
501 and over	50	3	4

4.3.3 Sampling for quality conformance test. Samples of spring hangers or swaybraces shall be selected from each lot in accordance with table II for the test described in 4.4.2.

Table II - Sampling for quality conformance test.

Number of spring hangers or swaybraces in inspection lot	Minimum number of spring hangers or swaybraces to be taken
15 or under	2
16 to 40	2
41 to 110	2
111 to 300	3
301 to 800	5
801 and over	7

Source: https://assist.dla.mil -- Downloaded: 202640-18T08:06Z
Check the source to verify that this is the current version before use.

4.4 Quality conformance examination and test.

4.4.1 Visual and dimensional examination. Each of the sample hangers or swaybraces selected in accordance with 4.3.2 shall be subjected to visual examination for all the requirements of this specification not involving tests. Any hanger or swaybrace in the sample containing one or more visual or dimensional defects shall not be offered for delivery, and if the number of defective hangers or swaybraces in any sample exceeds the acceptance number for the sample, this shall be cause for rejection of the lot represented by the sample.

4.4.2 Quality conformance test. The samples selected in accordance with 4.3.3 shall be subjected to the test specified in 4.5.1 to determine conformance with this specification. If any of the samples tested is found to be not in conformance with this specification, this shall be cause for rejection of the lot which it represents.

4.5 Tests procedures.

4.5.1 Load travel characteristics. The load travel characteristics shall be determined prior to and after H.I. shock as follows:

(a) Type I, constant support hangers. The constant support hanger shall be installed in a tensile test machine or other suitable device. The loads and deflections shall be recorded for each of three load settings, minimum, average and maximum. The load deviation shall be as specified in 3.15.1.
(b) Type II, variable support hangers. The variable support hanger shall be installed in a tensile test machine or other suitable device and the loads and deflection recorded over the full range of travel in both directions. The variation in supporting force shall be as specified in 3.16.1.
(c) Type III, swaybraces. The swaybrace shall be installed in a suitable device upon which it shall demonstrate its ability to accomodate movement as specified in 3.17.2.

4.5.2 High impact shock test. Except as modified below all high impact shock tests shall be in accordance with grade A, class I, type A of MIL-S-901. High impact shock tests shall be conducted as follows at facilities having shock test equipment satisfactory to the Naval Ship Engineering Center:

(a) Type I, constant support hangers. The constant support hanger shall be mounted in the shock stand (see figure 1) on a medium weight shock machine and while supporting a test load of 500 pounds shall be subjected to H.I. shock in accordance with table III. The test load shall be restrained to permit vertical movement only.
(b) Type II, variable support hangers. The variable support hanger shall be mounted in the shock stand (see figure 1) on a medium weight shock machine and loaded to cause a deflection of 1/2 the total travel available. The test load shall be restrained to permit vertical movement only. The test schedule shall be in accordance with table I of MIL-S-901.
(c) Type III. The swaybrace shall be installed on a lightweight shock machine as shown in figure 2. A test load shall be suspended from a rigid support in such a manner as to permit the load to move horizontally. The swaybrace to be tested shall be mounted horizontally with one end attached to the test load and the other end attached to the shock test machine anvil table (striking plate). The test schedule shall be in accordance with MIL-S-901. The test load shall be equivalent to one half of the maximum spring force of the swaybrace being tested.

Table III - Test schedule for constant support hangers.

Shock no.	Height hammer drop	Shock machine table travel	Hanger travel setting
	feet	inches	
1	1	3.0	top
2	1	3.0	top
3	2	1.5	top
4	2	3.0	center
5	2	3.0	center
6	2	1.5	bottom

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:06Z
Check the source to verify that this is the current version before use.

4.5.2.1 After each shock has been administered, the hanger or swaybrace should be inspected for damage. Locknuts shall be used wherever attachments are made to pipe hangers or swaybraces by threaded devices.

4.6 Comparison inspection. Where items have not been manufactured within one year prior to the start of production, a pilot lot of two each of each class hanger and swaybrace shall be made using the regular production line. The pilot model inspection shall be made only on items of hangers and swaybraces which have not been manufactured within a year. This inspection does not apply to delivery inspection on contract or orders.

4.7 Inspection of preparation for delivery. The packaging, packing, and marking shall be inspected for compliance with section 5 of this specification.

5. PREPARATION FOR DELIVERY

(The preparation for delivery requirements specified herein apply only for direct Government procurements. For the extent of applicability of the preparation for delivery requirements of referenced documents listed in section 2, see 6.4.)

5.1 Preservation-packaging. Preservation-packaging shall be level A or C, as specified (see 6.2).

5.1.1 Level A.

5.1.1.1 Cleaning, drying, and unit protection. Pipe support devices shall be cleaned, dried, and individually unit protected method I or method III in accordance with MIL-P-116. Method I shall apply to those devices that incorporate a filled and sealed hydraulic system, faying surfaces, partially exposed springs, or other exterior surfaces susceptible to corrosion. Preservative types P-2, P-10, or P-19 of MIL-P-116 shall be used and applied in accordance with the criteria specified therein. Method III shall be applied to devices constructed of corrosion resistant materials.

5.1.1.2 Unit packaging. Devices weighing 80 pounds or less can be packaged in fiberboard boxes conforming to PPP-B-636, class weather-resistant, load type I or type II. Box closure shall be as specified for method V in accordance with the appendix to the box specification. Devices exceeding 80 pounds shall be individually packed in containers specified in 5.2.

5.1.2 Level C. Preservation-packaging of pipe support devices shall afford protection against corrosion, deterioration, and physical damage during shipment from the supply source to the first receiving activity for immediate use. The suppliers normal preservation-packaging methods may be utilized when such meet the requirements of this level.

5.2 Packing. Packing shall be level A, B or C as specified (see 6.2).

5.2.1 General requirements for levels A and B. Cushioning, anchoring, blocking, and bracing for levels A and B with waterproofing for level A only shall be in accordance with MIL-STD-1186.

5.2.2 Level A. Pipe support devices packaged as specified (see 6.2), shall be packed in containers conforming to any one of the following specifications at the option of the contractor.

Specification	Container	Type or Class
PPP-B-601	Wood, cleated-plywood	Overseas
PPP-B-621	Wood, nailed and lock corner	Class 2
PPP-B-636	Fiberboard	Weather-resistant
PPP-B-640	Fiberboard, corrugated triplewall	Class 2

Wood and plywood containers shall be closed, strapped, or banded in accordance with the applicable container specification or appendix thereto. Fiberboard containers shall be closed, waterproofed, and reinforced with tape as specified in the appendix to the applicable container specification with method V closure applying to PPP-B-636 containers. Wood and wood-cleated plywood containers exceeding 200 pounds gross weight shall be modified by the addition of skids applied in accordance with the applicable container specification. PPP-B-636 containers specified in 5.1.1.2, closed and reinforced as specified herein, may be used as shipping containers with no further packing required.

Source: https://assist.dla.mil -- Downloaded: 202610-18T08:06Z
Check the source to verify that this is the current version before use.

5.2.3 Level B. Pipe support devices packaged as specified (see 6.2), shall be packed ntainers as specified in 5.2.2, except that the domestic type or class container shall ed, and waterproofing is not required. Containers shall be closed and banded in accord- with the applicable container specification or appendix thereto, except that PPP-B-636 ners shall be closed method I as specified in the appendix therein. Wood and wood- ed plywood containers exceeding 200 pounds gross weight shall be modified with skids as fied in 5.2.2. PPP-B-636 containers specified in 5.1.1.2 may be used as shipping iners with no further packing required.

5.2.4 Level C. Pipe support devices packaged as specified (see 6.2), shall be packed ntainers acceptable to the common carrier and which will insure safe delivery at the nations in a satisfactory condition at the lowest applicable rate. Containers or d of packing shall comply with Uniform Freight or National Motor Freight classification or regulations or other carrier rules as applicable to the mode of transportation.

5.2.4.1 Skid requirements. Wood constructed containers exceeding 200 pounds gross t shall have a minimum of two - 2 by 4 inch nominal wood skids to facilitate handling g transportation and storage.

5.2.5 Repair parts and tools. Repair parts and tools shall be preserved-packaged, d, and marked in accordance with MIL-R-196 for the levels specified as follows:

Destination	Preservation-Packaging	Packing
Stock	A	B
Shipboard	A	C
Immediate use	C	C

5.2.5.1 Submarine repair parts. Level A preservation-packaging methods shall be ied to transparent packages in accordance with MIL-STD-758, except that transparent shall conform to MIL-B-22191 as follows:

Method I - Type II film.
Method III - Type III film.

ng of submarine repair parts shall be in accordance with 5.2.5.

5.3 Marking. In addition to any special marking required by the contract or order 6.2), interior packages and exterior containers shall be marked in accordance with TD-129 and MIL-STD-758.

5.4 Technical manuals. Technical manuals shall be packaged, packed, and marked for evel specified (see 6.2) in accordance with MIL-M-15071.

5.5 Drawings. Drawings shall be prepared for shipment in accordance with MIL-D-1000 he level specified (see 6.2).

6. NOTES

6.1 Intended use. Hangers and swaybraces specified herein are intended for use in the rt and bracing of shipboard piping systems.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Type and class required (see 1.2).
(c) If rod should be furnished (see 3.7).
(d) Installation location or fabrication mark number (if such information is required by the procuring or installing activity) (see 3.10.1.1).
(e) Whether production drawings are required (see 3.11.2).
(f) Required supporting force in pounds (see 3.15.2).
(g) Load setting required (see 3.10.1.1 and 3.15.2).
(h) Thermal movement of pipe in inches, direction of thermal movement from cold to hot position (up or down) for class 1 (see 3.15.3).
(i) Levels of preservation-packaging and packing required (see 5.1, 5.2, 5.4, and 5.5).
(j) Special marking required (see 5.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:06Z
Check the source to verify that this is the current version before use.

6.3 First article inspection.

6.3.1 Invitations for bids should provide that the Government reserves the right to waive the requirement for samples for first article inspection as to those bidders offering a product which has been previously procured or tested by the Government, and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending procurement.

6.3.2 First article test waiver. A waiver on first article testing will be granted under the following conditions:

(a) The pipe support equipment under procurement has previously been tested within the 5 year period preceeding the current contract and there has been no design or material changes in the equipment to be produced.

(b) The pipe support equipment under procurement has previously been tested and procured for Navy use within the last 3 years regardless of the date of testing and there has been no design or material changes in the equipment to be produced.

6.4 Sub-contracted material and parts. The preparation for delivery requirements of referenced documents listed in section 2 do not apply when material and parts are procured by the supplier for incorporation into the shipment and lose their separate identity when the equipment is shipped.

6.5 THE MARGINS OF THIS SPECIFICATION ARE MARKED "$" TO INDICATE WHERE CHANGES (ADDITIONS, MODIFICATIONS, CORRECTIONS, DELETIONS) FROM THE PREVIOUS ISSUE HAVE BEEN MADE. THIS WAS DONE AS A CONVENIENCE ONLY AND THE GOVERNMENT ASSUMES NO LIABILITY WHATSOEVER FOR ANY INACCURACIES IN THESE NOTATIONS. BIDDERS AND CONTRACTORS ARE CAUTIONED TO EVALUATE THE REQUIREMENTS OF THIS DOCUMENT BASED ON THE ENTIRE CONTENT IRRESPECTIVE OF THE MARGINAL NOTATIONS AND RELATIONSHIP TO THE LAST PREVIOUS.

Preparing activity:
Navy - SH
(Project 5340-N055)

Source: https://assist.dla.mil -- Downloaded: 202640-18T08:06Z
Check the source to verify that this is the current version before use.

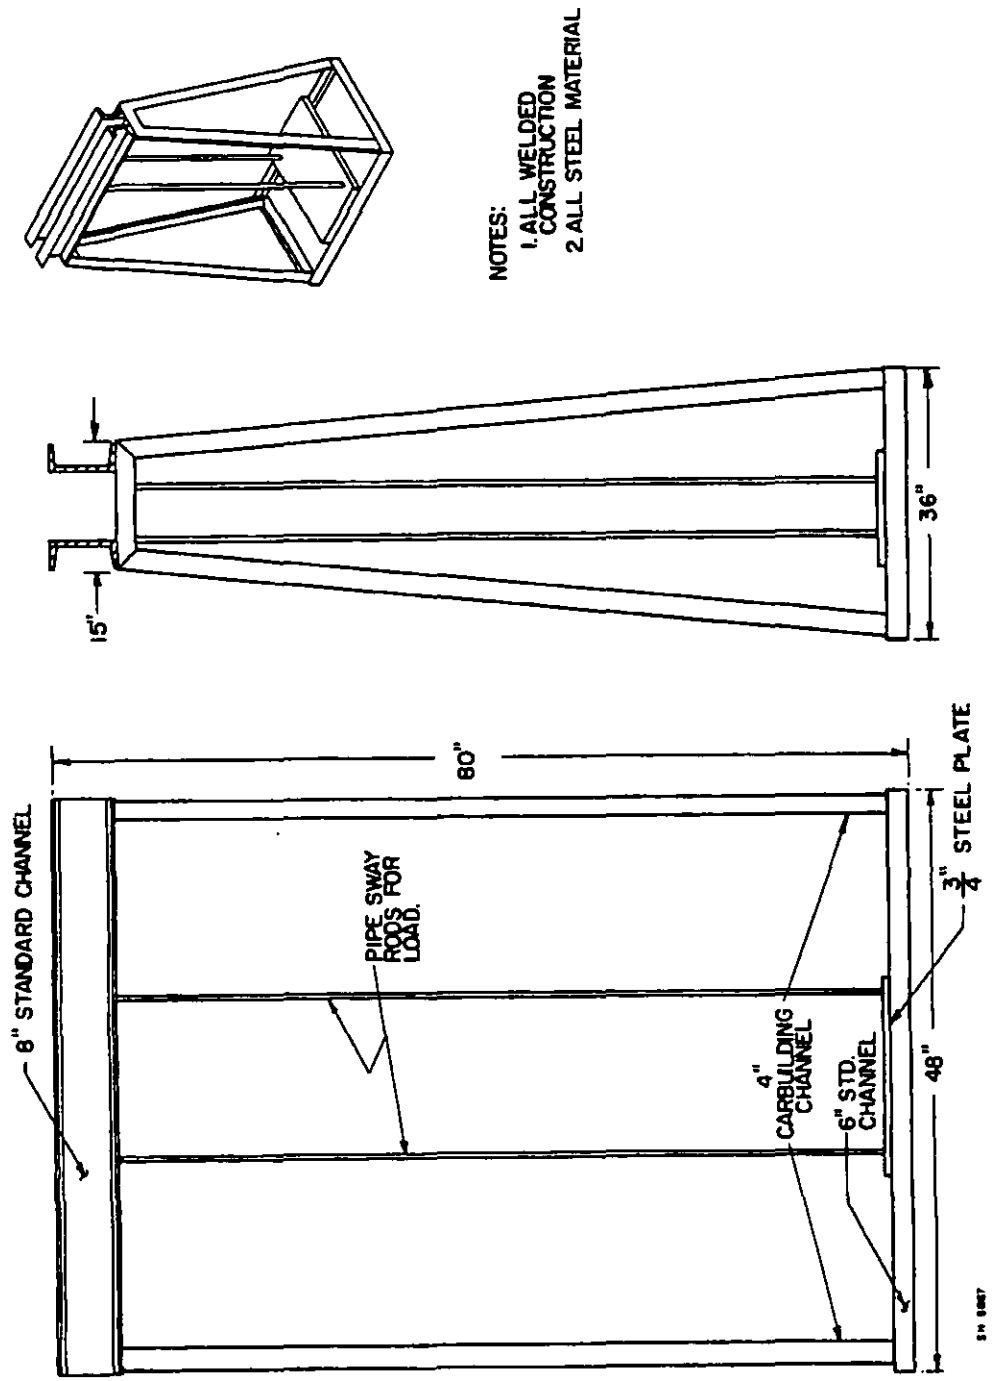


Figure 1 - Pipe hanger test stand for medium weight shock machine (for constant and variable support hangers).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:06Z
Check the source to verify that this is the current version before use.

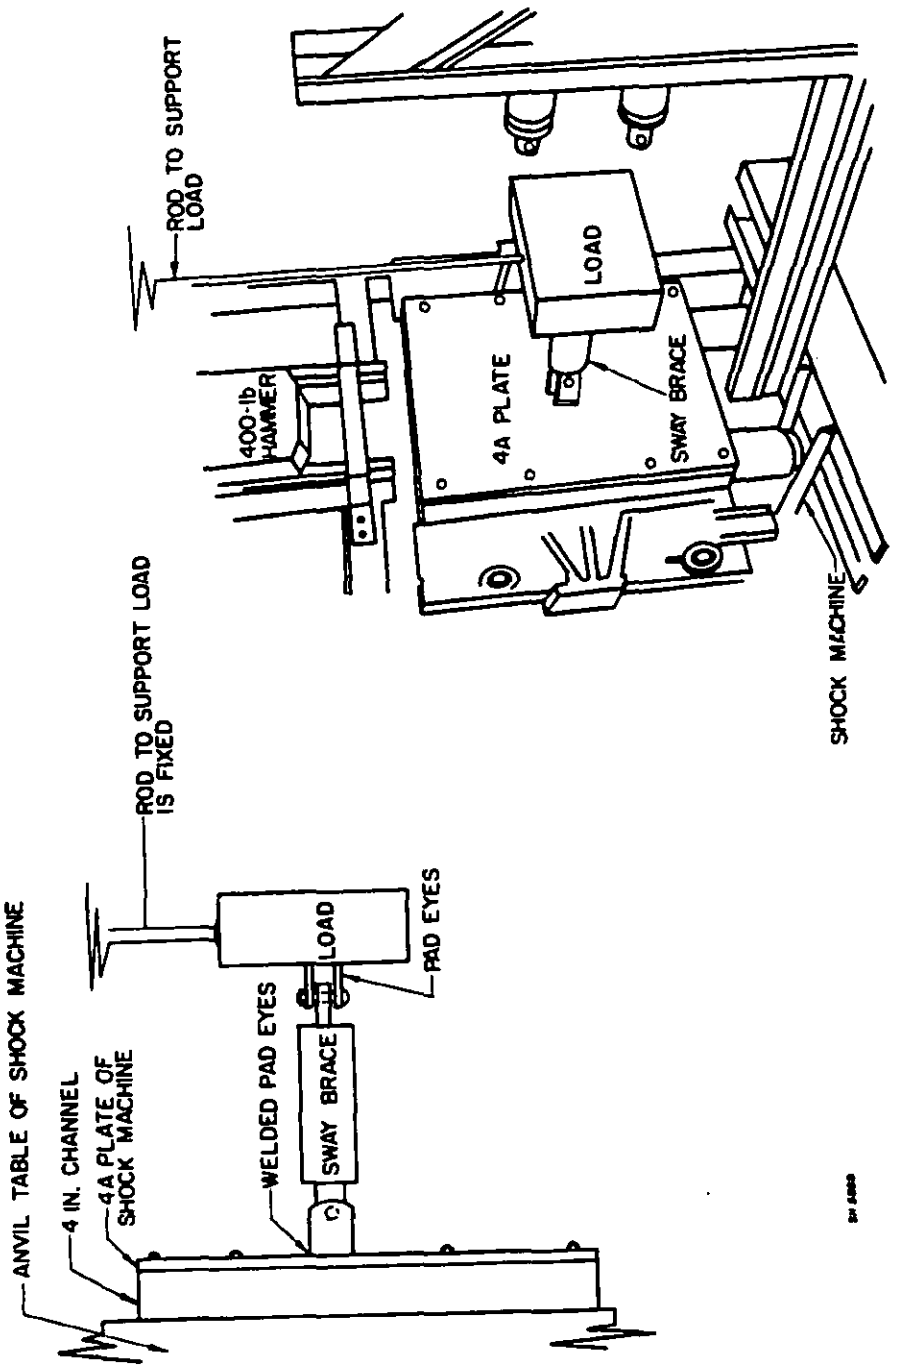


Figure 2 - Pipe swaybrace mounted for shock tests on lightweight shock machine.

Source: https://assist.dla.mil -- Downloaded: 20261O-18T08:06Z
Check the source to verify that this is the current version before use.

Summary of Performance Data

on

Pipe Hangers and Sway Braces

Equipment Identification

1. Type
2. Mfr.
3. Dwg No.
4. Applicable Specification
5. Rated Load

Sketch Showing Salient Dimensions

Preshock Load - Travel Data			Post Shock Load - Travel Data	
Load Pounds	Travel Inches	Results of Shock	Load Pounds	Travel Inches

Figure 3 - Recommended test data sheet.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:06Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 68 WHICH MAY BE USED

S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 202640-18T08:06Z
Check the source to verify that this is the current version before use.