MILITARY SPECIFICATION

WIND DIRECTION AND WIND SPEED INDICATING EQUIPMENT, TYPE B

Thia amendment forms a part of Military Specification MIL-W-15805F(SHIPS), dated 10 December 1962.

PAGE 1 of AMENDMENT-2

Delete “Distribution statement" at top of page

Page 1

2.1 MILITARY, STANDARDS: Delete reference to “MIL-STD-242” and l dd the following standards:

“MIL-STD-461 - Electromagnetic Interference Characteristics, Requirements for Equipment.
"MIL-STD-462 - Electmagnetic Interference Characteristics, Measurement of.
“MIL-STD-740 - Airborne and Structureborne Noise Measurements and Acceptance Criteria of Shipboard Equipment.”

PAGES 2 and 3

3.3.1: Column 1, lines 13 l nd 14, delete; In column 2: line 4, delete "Iron or steel" and substitute “Ferrous alloy”; line 31, add "and inductors", line 33, delete "see" and substitute ‘except; line 46, delete; line 47, delete "and circuits”, line 50, add "(see 3.4.1, 3.4.2, 3.4.3.1.1, 3.4.3.2.1, 3.4.4.2 l and 3.4.6)”, In column 3: line 5, delete ‘Welding” and substitute “Structural welding”; line 9, add "(not required for transmitter and headwind computer)”; line 14, delete “Personnel protection” and substitute "Safety (personnel hazard)”; line 15, add “(see 3.3.1.3)”; line 22, delete) line 30, add "(see 3.3.1.4)”; line 48, delete "ane general examination".

3.3.1.1: Delete.

Add new paragraphs:

“3.3.1.3 Electromagnetic interference emission and susceptibility. The equipment shall conform to the electromagnetic interference emission and susceptibility requirements for class ID of MIL-STD-461.

"3.3.1.4 Structureborne noise. The equipment shall conform to the structureborne noise acceptance level for type 3 of MIL-STD-740, except the correction factor "For solidly mounted equipment subtract 20DB from the curves" is not applicable.”

3.3.2.1: In item (b), delete ’45” and substitute “46”, in item (c), delete “60” and substitute 061”; and in item (d), delete “80” and substitute “81”.

3.4.1, line 15: Delete ‘splashproof” and substitute ‘dripproof".

PAGE 4

3.4.2, line 24: Delete ‘120-volt" and substitute “115-volt”.

PAGE 5

3.4.3, 3.4.3.1, and 3.4.3.2: Delete l nd substitute:

"3.4.3 Wind direction and speed indicator. The type B wind direction and wind speed indicator equipment shall be furnished with type B or type F wind direction and speed indicators as specified (see 6.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:04Z
Check the source to verify that this is the current version before use.

"3 4.3.1 Type B.

"3.4.3 .1.1 The type B wind indicator shall be manufactured in accordance with Drawing 3331241. The Indicator shall contain, in a watertight enclosure, the mechanism incorporating size 1F synchros, as specified in MIL-S-2335, to receive signals from the wind direction and speed transmitter, and to indicate the relative wind direction in degrees and the apparent wind speed in knots. The indicator shall contain two independent units, one for direction and the other for speed. Electrical connections shall be made to each unit by plug-jack type terminals, Winchester types A7P and A7S, or equal. The units shall be bolted in the case. A hole in the case and plug with a l-inch National Pipe Thread class 2 in accordance with Handbook H-28 shall be provided in one end for a stuffing tube fitting.

"3.4.3.1.2 Size. Type B indicators shall be as small and lightweight as practicable, but in no case shall dimensions and weight exceed the following:

Height - 13-9/16 inches
Width - 7-1/2 inches
Depth - 5-7/8 inches
Weight 23 pounds 7 ounces
(Figure 4 is provided for guidance only)

"3.4.3.1.3 Dials. Type B indicator shall have two dials 4 inches in diameter; one dial shall indicate wind direction and the other shall indicate wind speed. The dials shall be marked in accordance with Drawing 3331269. Red dial illumination shall be provided in the indicator.

"3.4.3.2 Type F.

"3.4.3.2.1 The type F wind indicator shall be manufactured in accordance with Bendix Corporation. Friez Instrument Division Drawing 1148595. The indicators shall contain, in a watertight enclosure, the mechanism incorporating type 18TR6 synchro in accordance with MIL-S-20708, to receive signals from the wind direction and speed transmitter and to indicate the relative wind direction in degrees and the apparent wind speed in knots. The indicator shall contain two synchros on a single chassis. Electrical connections shall be made to the case by a plug and jack connector by an Amphenol 26-4100-16P and Amphenol 26-4200-16s, or equal. A hole at each end of the case, size 1-inch National Pipe Thread class 2 in accordance with Handbook H-28 shall be provided for cable entrance. A power transformer, for the lighting circuit shall be located in the housing. A variable resistor for controlling the light intensity shall be provided, and shall be adjusted by a knob from the outside. The cover of the housing shall provide a single glass for observing the two dials.

"3.4.3.2.2 Size. Type F indicators shall be as small and lightweight as practicable, but in no case shall dimensions and weight exceed the following:

Height - 11-1/8 Reference inches
Width - 7-3/8 Reference inches,
Depth - 4-13/16 Reference inches
Weight - 15 pounds
(Figure 9 is provided for guidance only)

"3.4.3.2.3 Dials. Type F indicators shall have two dials 4.230 ± 0.010 inches in diameter; one dial shall indicate wind direction and the other shall indicate wind speed. The dials shall be marked in accordance with Drawing 3331269. Red dial illumination shall be provided in the indicator."

3.4.3.6, after "Illumination": Add "(Type B)".

3.4.4.2, line 2: Delete 'bound" and substitute 'mounted", and add "dripproof" after "aluminum".

3.4.4.15, line 5: Delete "120 volts" and substitute '115 volts".

Add the following paragraph:

"3.4.4.20 Shock and vibration. The wind direction and wind speed recorder shall not be subjected to the and vibration requirements specified in MIL-I-983."

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:04Z
Check the source to verify that this is the current version before use.

PAGE 7

3.4.5.3, line 4: Delete “12” and substitute "27-43”.

3.4.7: Delete and substitute:

“3.4.7 Repair parts. Repair parts and applicable repair parts lists required for maintenance of the parent equipment shall be in accordance with table I.”

Table I: Delete and substitute:

“Table I - Onboard repair parts required per ship.

Item	Part	All others	CVA's	ASROC equipped
		MOD 0	MOD 0	MOD 0
	Detector, transmitter indicator			
1	Ball bearings (one of each type used in the detector) (only if non-standard)	1	1	1
2	Pliers “tru-arc” (types 62562-A and 60464)	1	1	1
3	Dampener assembly (transmitter)	0	1	1
4	Integrator assembly (transmitter)	0	1	1
5	Box special screws (screws not available in normal stock)	1	1	1
6	Roller (disc), shaft assembly	1	1	1
	Crosswind and headwind computer and indicator			
7	Potentiometer (one of each)	0	1	0
8	Motor assembly	0	1	0
9	Microammeter movement	0	1	0

PAGE 8

4.2, list of tests: Opposite ‘shielding and radio frequency noise reduction”, under test paragraph, delete "MIL-I-983" and substitute “4.5.7”; after ‘Airborne noise”, add “(grade C)’; the following test between “airborne noise”, and “Temperature and humidity”:

Test	Requirement paragraph	Test paragraph
“Structureborne noise (type 3)	3.3.1 and 3.3.1.4	4.5.8 "

Add the following test after “mounting":

Test	Requirement paragraph	Test paragraph
“Enclosure	3.3.1	MIL-I-983”

and in “shock test”, before ‘recorder”, insert “detector or”.

PAGES 9 and 10

4.4, list of tests: In group B, add the following test after "supply line voltage and frequency”:

Test	Requirement paragraph	Test paragraph
“Dielectric strength and insulation resistance	3.3.1	MIL-I-983"

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:04Z
Check the source to verify that this is the current version before use.

In group C, after “airborne noise”, add "(grade C)"; add the following test after “airborne noise”:

Test	Requirement paragraph	Test paragraph
“Structureborne noise (type 3)	3.3.1 and 3.3.1.4	4.5.8 "

Opposite "shielding and radio frequency noise reduction", under test paragraph, delete "MIL-I-983" and substitute "4.5.7".

Add the following test after ‘mounting”:

Test	Requirement paragraph	Test paragraph
“Enclosure	3.3.1	MIL-I-983”

and in “shock test., before “recorder” insert "detector or".

Page 11

4.5.l.2(b)(4)c, lines 20, 21, 22, and 23: Delete and substitute:

"r.p.m., 75.6 knots.
57 cycles/1800
r.p.m.
(60 of 75.6) 80 knots."
57

Table III, second column: Delete and substitute:

"

Correct intensity Knots
16.8 33.6 50.4 67.2 75.6

"

PAGE 13

Add the following paragraphs:

“4.5.7 Electromagnetic interference emission and susceptibility. Electromagnetic interference emission and susceptibility tests shall be performed in accordance with MIL-STD-462 to determine conformance with 3.3.1.3.

“4.5.8 Structureborne noise. Structureborne noise tests shall be performed in accordance with type 3 of MIL-STD-740 to determine conformance with 3.3.1.4.”

5.1 and 5.2.1.1: Add “(see 5.3)”.

Add the following paragraphs:

"5.3 Use of polystyrene (loose-fill) material.

"5.3.1 For domestic shipment and early equipment installation and level C packaging and packing. Unless otherwise approved by the procuring activity (see 6.1), use of polystyrene (loose-fill) material for domestic shipment and early equipment installation and

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:04Z
Check the source to verify that this is the current version before use.

level C packaging and packinq applications such as cushioning, filler and dunnage is prohibited. When approved, unit packages and containers (interior and exterior) shall be marked and labelled as follows:

CAUTION

Contents cushioned, etc. with polystyrene (loose-fill) material.
Not to be taken aboard ship.
Remove and discard loose-fill material before shipboard storage.
If required, recushion with cellulosic material bound fiber,
fiberboard or transparent flexible cellular material.'

"5.3.2 For level A packaging and level A and B packing. Use of polystyrene (loose-fill) material is prohibited for level A packing and level A and B packing applications such as cushioning, filler and dunnage."

PAGES 13 and 14

6.1: Add "(h) Whether type B or type F indicator is required (see 3.4.3).
(i) When polystyrene (loose-fill) material is approved (see 5.3)."

PAGES 28 and 29

Insert attached figure 9.

NOTE: The margins of this amendment are marked "#" to indicate where changes (additions, modifications, corrections, deletions) from the previous amendment have been made. This was done as a convenience only and the Government assumes no liability whatsoever for l ny inaccuracies of these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.

Preparing activity:
Navy - SH
(Project 6660-N009)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:04Z
Check the source to verify that this is the current version before use.

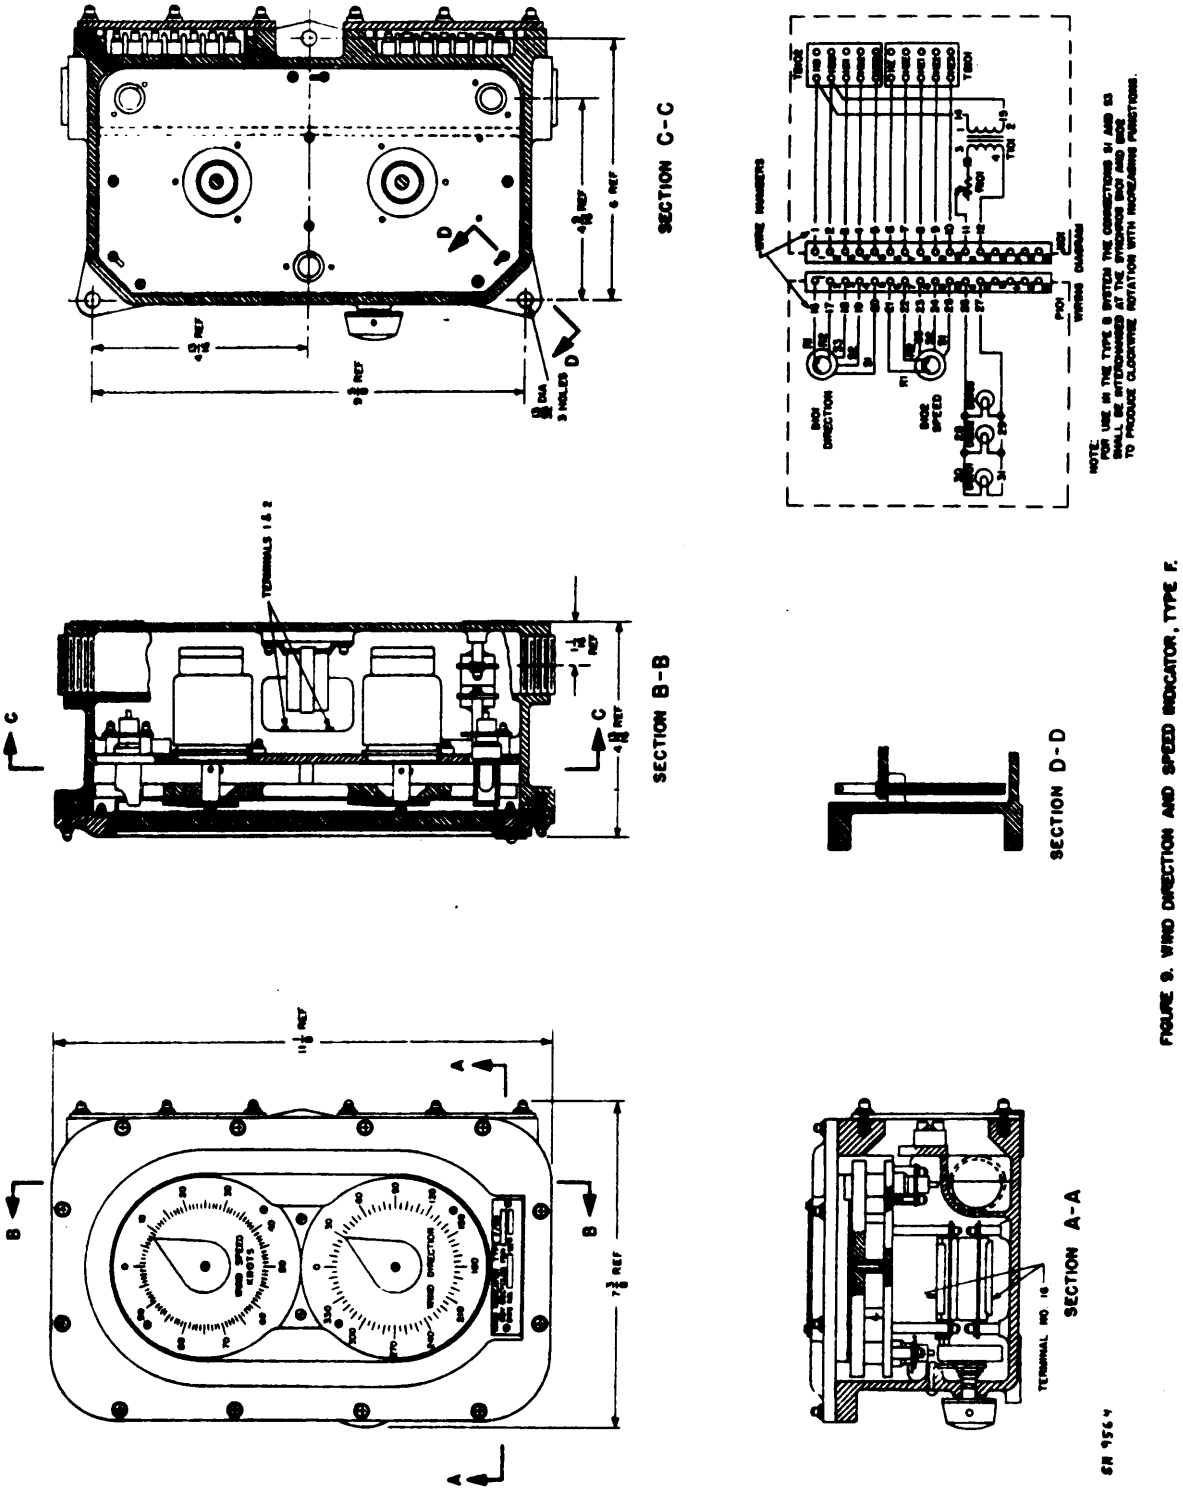


FIGURE 6. WIND DIRECTION AND SPEED INDICATOR, TYPE F.

★ U. S. GOVERNMENT PRINTING OFFICE: 1977-703-122/6622

Source: https://assist.dla.mil -- Downloaded: 2026l0-18T08:04Z
Check the source to verify that this is the currenversion before use.