[INCH-POUND]
A-A-55569/1
June 3, 1996
SUPERSEDING
A-A-55423
April 22, 1993

COMMERCIAL ITEM DESCRIPTION

FUSE, INCLOSED LINK, FAST ACTING, 1 AMPERES (A) THROUGH 40 A, AUTOMOTIVE BLADE TYPE

The General Services Administration has authorized the use of this commercial item description (CID) for all federal agencies.

1. SCOPE. This CID covers the general requirements for fast acting, automotive blade type, inclosed link fuses rated at 1A through 40 A. Fuses covered by this CID are intended for commercial/industrial applications.

2. CLASSIFICATION. This CID uses a classification system which is included in the Part or Identification Number (PIN) as shown in the following example (see 6.1).

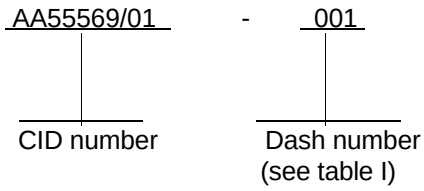

3. SALIENT CHARACTERISTICS.

3.1 Design and construction. Fuses supplied to this CID shall be as specified herein, and shall meet the requirements of SAE J 1284 for blade type, electrical fuses (see figure 1).

3.2 Ampere rating. The ampere rating shall be as specified in table I.

3.3 Voltage rating. The voltage rating shall be 32 V dc.

3.4 Opening time. The opening time shall be as specified in table II.

3.5 Accommodating fuseholder. Fuses supplied to this CID may be used with fuseholder CID A-A-55570/1.

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any data which may improve this document should be sent to: Defense Electronics Supply Center, ATTN: DESC-ELDM 1507 Wilmington Pike, Dayton, OH 45444-5765, or telephone (513) 296-6189, or facsimile (FAX) (513) 296-8868.

AMSC N/A FSC 5920

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.

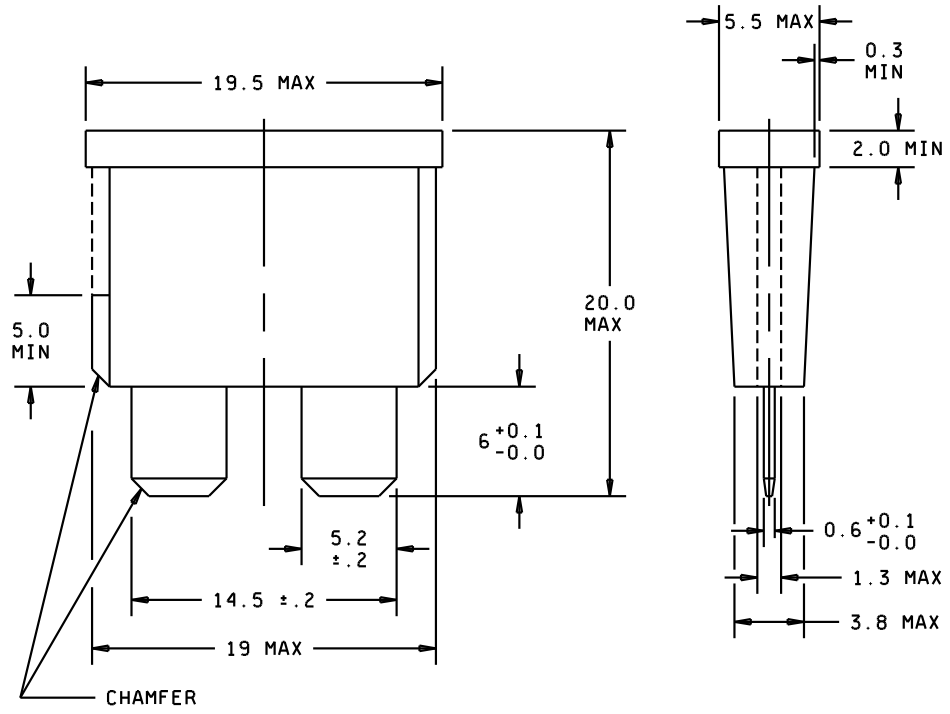

mm	Inches	mm	Inches
0.1	.004	5.2	.205
0.2	.008	5.5	.217
0.3	.012	6.0	.236
0.6	.024	14.5	.571
1.3	.051	19.0	.748
2.0	.079	19.5	.768
3.8	.150	20.0	.787
5.0	.197		

NOTES:
1. Dimensions are in millimeters.
2. Tolerance is ±0.13 mm (0.005).
3. The U.S. Government preferred system of measurement is the metric SI system. However, this item was originally designed using inch-pound units of measurement. In the event of conflict between the metric and inch-pound units, the inch-pound units shall take precedence.

Figure 1. Configuration and dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics.

AA55569/01-	Ampere rating	Color code 1/
001	1	Black
002	2	Grey
003	3	Violet
004	4	Pink
005	5	Tan
006	7.5	Brown
007	10	Red
008	15	Blue
009	20	Yellow
010	25	Natural
011	30	Green
012	35	Blue green
013	40	Amber

1/ Fuses are color-coded for easy amperage identification.

TABLE II. Rating versus opening time.

Percent of rating	Current rating	Opening time	
		Minimum	Maximum
100	1 A - 40 A	100 hours	---
135	1 A - 2 A	.50 seconds	1,800 seconds
	3 A - 40 A	.75 seconds	1,800 seconds
200	1 A - 2 A	.10 seconds	5 seconds
	3 A - 40 A	.15 seconds	5 seconds
350	1 A - 2 A	.020 seconds	.5 seconds
	3 A - 40 A	.080 seconds	.5 seconds

3.6 Marking. Fuses supplied to this CID shall be marked with the manufacturer's (MFGR) standard commercial PIN.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS. Quality assurance provisions shall be as specified in A-A-55569.

5. PACKAGING. Packaging shall be as specified in A-A-55569.

6. NOTES.

6.1 PIN. The PIN should be used for Government purposes to buy commercial products to this CID. See section 2 for PIN format.

6.2 CAGE code. For ordering purposes, inventory control, and submission of these fuses to DESC under the Military Parts Control Advisory Group (MPCAG) evaluation program, CAGE code 58536 should be used.

6.3 Source of documents.

Commercial Item Description

A-A-55423	-	Fuse, Inclosed Link, Automotive Blade Type.
A-A-55569	-	Fuse, Inclosed Link, Automotive Blade Type, General Requirements for.
A-A-55570/1	-	Fuseholder, Extractor Post, In-Line Type, Accommodates Fast Acting, Automotive Blade Type, Inclosed Link, Fuses.

(Copies of commercial item descriptions are available from the Defense Printing Service Detachment Office, Building 4D (Customer Service), 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

OTHER PUBLICATIONS

SOCIETY OF AUTOMOTIVE ENGINEERS (SAE)

SAE J 1284 - Blade Type Electric Fuses, Standard.

(Applications for copies should be addressed to the Society of Automotive Engineers, Incorporated, 400 Commonwealth Drive, Warrendale, PA 15096-0001.)

(Industry association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

6.4 Ordering data. Ordering data shall be as specified in A-A-55569.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.

6.5 Commercial products. As part of the market analysis and research effort, this CID was coordinated with the following MFGRs of commercial products. At the time of CID preparation and coordination, these MFGRs were known to have commercial products that would meet the requirements of this CID. (NOTE: This information should not be considered as a list of approved MFGRs or be used to restrict procurement to only the MFGRs shown.)

MFGR's CAGE	MFGR's name and address
71400	Bussmann Cooper Industries P.O. Box 14460 St. Louis, MO 63178-4460 (314) 527-1253
75915	Littelfuse Incorporated 800 E. Northwest Highway Des Plaines, IL 60016-3096 (312) 824-1188

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.

6.6 Part number (P/N) supersession data. This CID supersedes the following MFGRs P/Ns as shown. This information is being provided to assist in reducing proliferation in the government inventory system.

CID dash number (see table I) AA55569/01-	MFGR's CAGE	MFGR's PIN 1/	MFGR's CAGE	MFGR's PIN 1/
001	71400	ATC-1	75915	257001
002	71400	ATC-2	75915	257002
003	71400	ATC-3	75915	257003
004	71400	ATC-4	75915	257004
005	71400	ATC-5	75915	257005
006	71400	ATC-7.5	75915	25707.5
007	71400	ATC-10	75915	257010
008	71400	ATC-15	75915	257015
009	71400	ATC-20	75915	257020
010	71400	ATC-25	75915	257025
011	71400	ATC-30	75915	257030
012	71400	ATC-35	75915	257035
013	71400	ATC-40	75915	257040

1/ The MFGR P/N shall not be used for procurement to the requirements of this CID. At the time of preparation of this CID, the aforementioned commercial products were reviewed and could be replaced by the CID PIN shown.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.

6.7 CID number supersession data. This CID supersedes CID A-A-55423 and its dash numbers as shown.

CID dash number (see table I) AA55569/01-	Superseded CID dash number A-A-55423-
001	---
002	---
003	01
004	02
005	03
006	04
007	05
008	06
009	07
010	08
011	09
012	---
013	---

6.8 Government users. To acquire information on obtaining these fuses from the Government inventory system, contact Defense Electronics Supply Center, ATTN: DESC-EOM, 1507 Wilmington Pike, Dayton, OH 45444-5519, or telephone (513) 296-5106.

MILITARY INTERESTS:

Custodians:
Navy - EC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - 7FXE

Preparing Activity:

DLA-ES

Project 5920-0536-01

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.