[INCH-POUND]
A-A-55570/2
June 3, 1996

COMMERCIAL ITEM DESCRIPTION

FUSEHOLDER, EXTRACTOR POST, IN-LINE CRIMP TYPE, ACCOMMODATES MINIATURE, AUTOMOTIVE BLADE TYPE, INCLOSED LINK FUSES.

The General Services Administration has authorized the use of this commercial item description (CID) for all federal agencies.

1. SCOPE. This CID covers the general requirements for in-line crimp type, extractor post fuseholders which accommodate miniature, automotive blade type, inclosed link fuses. Fuseholders covered by this CID are intended for commercial/industrial applications.

2. CLASSIFICATION. This CID uses a classification system which is included in the Part or Identification Number (PIN) as shown in the following example (see 6.1).

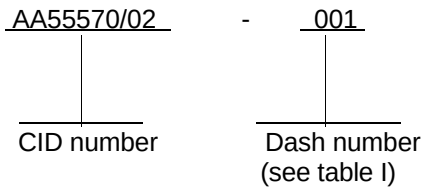

3. SALIENT CHARACTERISTICS.

3.1 Design and construction. Fuseholders supplied to this CID shall be as specified herein (see figure 1).

3.2 Ampere rating. The ampere rating shall be as specified in table I.

3.3 Voltage rating. The voltage rating shall be 32 V dc.

3.4 Fuseholder body material. The fuseholder body material shall be black thermoplastic.

3.5 Terminal plating. Terminals shall be tin plated copper alloy. Use of pure tin plating is prohibited as a final finish and as an undercoat. Use of tin-lead (Sn-Pb) finishes are acceptable provided that the minimum lead content is 3 percent.

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any data which may improve this document should be sent to: Defense Electronics Supply Center, ATTN: DESC-ELDM 1507 Wilmington Pike, Dayton, OH 45444-5765, or telephone (513) 296-6189, or facsimile (FAX) (513) 296-8868.

AMSC N/A FSC 5920

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.

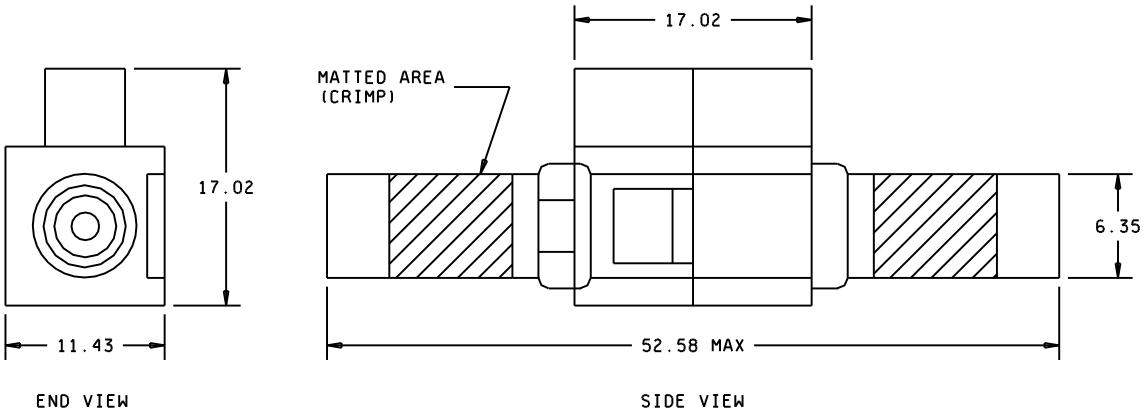

mm	Inches
6.35	.25
11.43	.45
17.02	.67
25.40	1.00
52.58	2.07

NOTES:
1. Dimensions are in millimeters.
2. Tolerance is ±0.13 mm (0.005).
3. The U.S. Government preferred system of measurement is the metric SI system. However, this item was originally designed using inch-pound units of measurement. In the event of conflict between the metric and inch-pound units, the inch-pound units shall take precedence.

Figure 1. Configuration and dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics.

AA55570/02-	Ampere rating	Terminals	Fuse accommodation
001	20 A maximum	Terminals will accept #16 - 22 AWG standard wire. 1/	Accommodates CID fuses AA55669/02-001 through AA55569/02-008.
002	30 A maximum	Terminals will accept #10 - 14 AWG standard wire. 2/	Accommodates CID fuses AA55569/02-009 and AA55569/02-010.

1/ Use appropriate wire size based on the fuse used. For example, use # 16 AWG wire for 20 A fuse.
2/ Use appropriate wire size based on the fuse used. For example, use # 10 AWG wire for 30 A fuse.

3.6 Operating temperature. The operating temperature shall be -40° C to +105° C.

3.7 Crimping tool. A standard crimping tool may be used to crimp the matted area to secure wire.

3.8 Marking. Fuseholders supplied to this CID shall be marked with the manufacturer's (MFGR) standard commercial PIN.

4. QUALITY ASSURANCE PROVISIONS. Quality assurance provisions shall be as specified in A-A55570.

5. PACKAGING. Packaging shall be as specified in A-A-55570.

6. NOTES.

6.1 PIN. The PIN should be used for Government purposes to buy commercial products to this CID. See section 2 for PIN format.

6.2 CAGE code. For ordering purposes, inventory control, and submission of these fuseholders to DESC under the Military Parts Control Advisory Group (MPCAG) evaluation program, CAGE code 58536 should be used.

6.3 Source of documents.

Commercial Item Description

A-A-55570 - Fuseholder, Which Accommodates, Automotive Blade Type, Inclosed Link Fuses, General Requirements for.

A-A-55569/02 - Fuse, Inclosed Link, Fast Acting, 2 Through 30 Amperes (A), Miniature, Automotive Blade Type.

(Copies of commercial item descriptions are available from the Defense Printing Service Detachment Office, Building 4D (Customer Service), 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.

6.4 Ordering data. Ordering data shall be as specified in A-A-55570.

6.5 Commercial products. As part of the market analysis and research effort, this CID was coordinated with the following MFGRs of commercial products. At the time of CID preparation and coordination, these MFGRs were known to have commercial products that would meet the requirements of this CID. (NOTE: This information should not be considered as a list of approved MFGRs or be used to restrict procurement to only the MFGRs shown.).

MFGR's CAGE	MFGR's name and address
75915	Littelfuse Incorporated 800 E. Northwest Highway Des Plaines, IL 60016-3096 (312) 824-1188

6.6 Part number (P/N) supersession data. This CID supersedes the following MFGRs P/N as shown. This information is being provided to assist in reducing proliferation in the government inventory system.

CID dash number (see table I) AA55570/02-	MFGRs CAGE	MFGRs PIN 1/
001	75915	153002
002	75915	153003

1/ The MFGRs PIN shall not be used for procurement to the requirements of this CID. At the time of preparation of this CID, the aforementioned commercial products were reviewed and could be replaced by the CID PIN shown.

6.7 Government users. To acquire information on obtaining these fuseholders from the Government inventory system, contact Defense Electronics Supply Center, ATTN: DESC-EOM, 1507 Wilmington Pike, Dayton, OH 45444-5519, or telephone (513) 296-5106.

MILITARY INTERESTS:

Custodians:
Navy - EC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - 7FXE

Preparing Activity:

DLA-ES

Project 5920-0537-02

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.