[INCH-POUND]
A-A-55570/3
June 3, 1996


COMMERCIAL ITEM DESCRIPTION

FUSEHOLDER, EXTRACTOR POST, PRINTED CIRCUIT (PC) BOARD MOUNT TYPE, ACCOMMODATES MINIATURE, AUTOMOTIVE BLADE TYPE, INCLOSED LINK, FUSES.

The General Services Administration has authorized the use of this commercial item description (CID) for all federal agencies.

1. SCOPE. This CID covers the general requirements for PC board mount type extractor post, fuseholders which accommodate miniature, automotive blade type, inclosed link fuses. Fuseholders covered by this CID are intended for commercial/industrial applications.

2. CLASSIFICATION. This CID uses a classification system which is included in the Part or Identification Number (PIN) as shown in the following example (see 6.1).

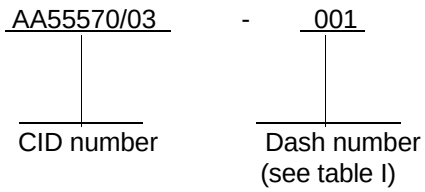

3. SALIENT CHARACTERISTICS.

3.1 Design and construction. Fuseholders supplied to this CID shall be Underwriters Laboratories (UL) recognized, Canadian Standards Association (CSA) certified and shall be as specified herein (see figures 1, 2, and 3).

3.2 Ampere rating. Fuseholders supplied to this CID shall be recognized under the Components Program of UL for 15 amperes (A) and shall be certified for 10 A by CSA.

3.3 Voltage rating. The voltage rating shall be 32 V dc.

3.4 Fuseholder body material. The fuseholder body material shall be black thermoplastic with a UL 94VO flammability rating as a minimum.

3.5 Terminal plating. Terminals shall be tin plated copper alloy. Use of pure tin plating is prohibited as a final finish and as an undercoat. Use of tin-lead (Sn-Pb) finishes are acceptable provided that the minimum lead content is 3 percent.


Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any data which may improve this document should be sent to: Defense Electronics Supply Center, ATTN: DESC-ELDM, 1507 Wilmington Pike, Dayton, OH 45444-5765, or telephone (513) 296-6189, or facsimile (FAX) (513) 296-8868.


AMSC N/A FSC 5920

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.

Horizontal mount
(AA55570/03-001)

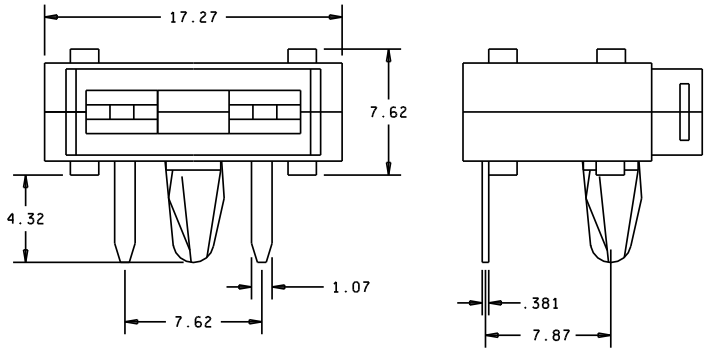

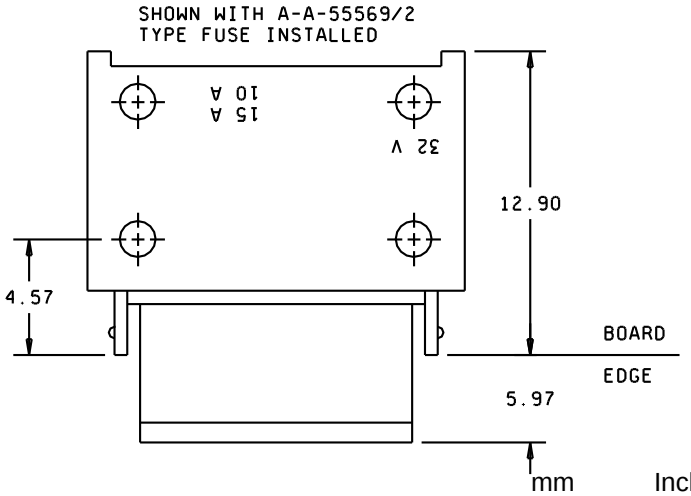


mm	Inches	mm	Inches
.381	.015	7.62	.300
1.07	.042	7.87	.310
4.32	.170	12.90	.508
4.57	.180	17.27	.680
5.97	.235		

NOTES:
1. Dimensions are in millimeters.
2. Tolerance is ±0.13 mm (0.005).
3. The U.S. Government preferred system of measurement is the metric SI system. However, this item was originally designed using inch-pound units of measurement. In the event of conflict between the metric and inch-pound units, the inch-pound units shall take precedence.

Figure 1. Configuration and dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.

Horizontal mount
(AA55570/03-001)

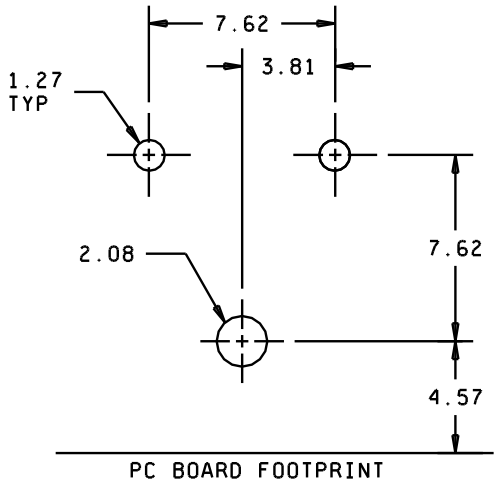


mm	Inches
1.27	.050
2.08	.082
3.81	.150
4.57	.180
7.62	.300

NOTES:
1. Dimensions are in millimeters.
2. Tolerance is ±0.13 mm (0.005).
3. The U.S. Government preferred system of measurement is the metric SI system. However, this item was originally designed using inch-pound units of measurement. In the event of conflict between the metric and inch-pound units, the inch-pound units shall take precedence.

Figure 1. Configuration and dimensions - continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.

Vertical mount
Single or stackable end unit
(AA55570/03-002)

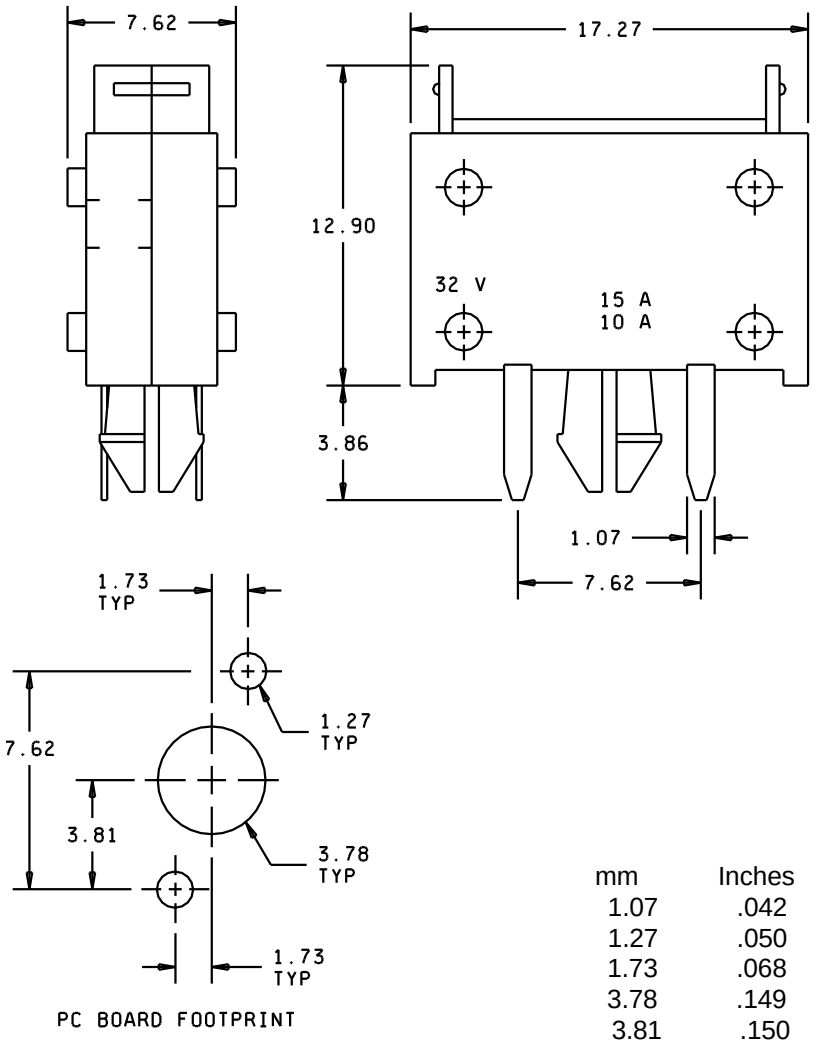


mm	Inches	mm	Inches
1.07	.042	3.86	.152
1.27	.050	7.62	.300
1.73	.068	12.90	.508
3.78	.149	17.27	.680
3.81	.150		

NOTES:
1. Dimensions are in millimeters.
2. Tolerance is ±0.13 mm (0.005).
3. The U.S. Government preferred system of measurement is the metric SI system. However, this item was originally designed using inch-pound units of measurement. In the event of conflict between the metric and inch-pound units, the inch-pound units shall take precedence.

Figure 2. Configuration and dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.

Vertical mounts
Stackable unit
(AA55570/03-003)

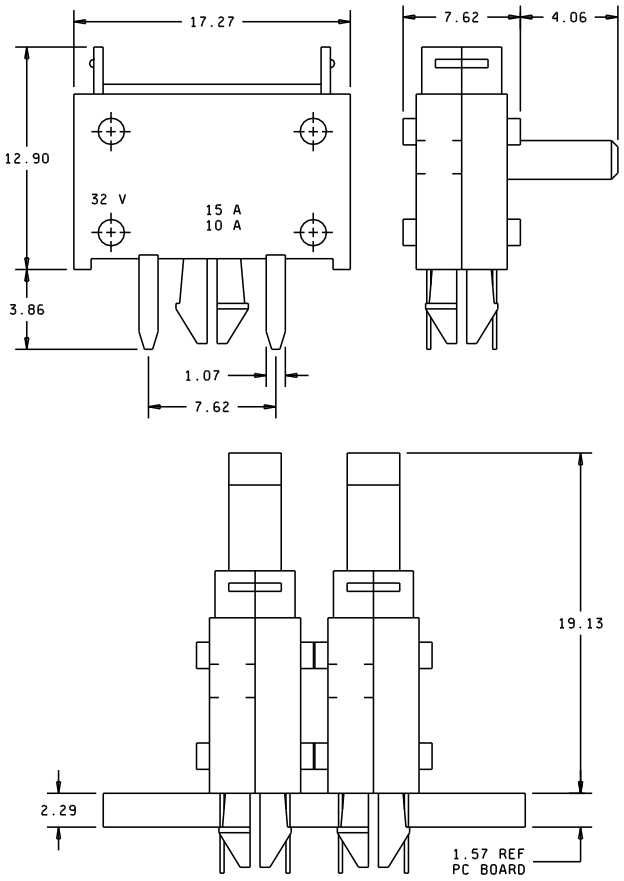


mm	Inches	mm	Inches
1.07	.042	7.62	.300
1.57	.062	12.90	.508
2.29	.090	17.27	.680
3.86	.152	19.13	.753
4.06	.160		

NOTES:
1. Dimensions are in millimeters.
2. Tolerance is ±0.13 mm (0.005).
3. The U.S. Government preferred system of measurement is the metric SI system. However, this item was originally designed using inch-pound units of measurement. In the event of conflict between the metric and inch-pound units, the inch-pound units shall take precedence.

Figure 3 Configuration and dimensions.
Vertical mounts

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.

Stackable unit
(AA55570/03-003)

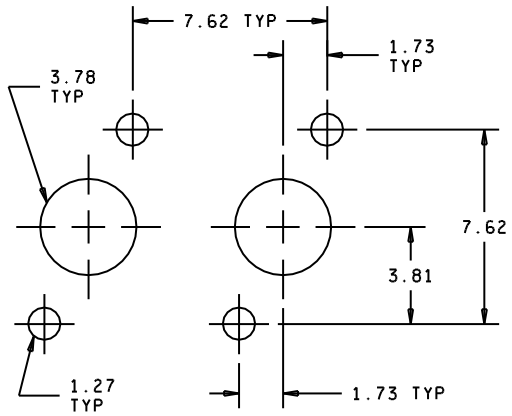

PC BOARD FOOTPRINT

mm	Inches
1.27	.050
1.73	.068
3.78	.149
3.81	.150
7.62	.300

NOTES:
1. Dimensions are in millimeters.
2. Tolerance is ±0.13 mm (0.005).
3. The U.S. Government preferred system of measurement is the metric SI system. However, this item was originally designed using inch-pound units of measurement. In the event of conflict between the metric and inch-pound units, the inch-pound units shall take precedence.

Figure 3 Configuration and dimensions - continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics.

AA55570/03-	Description	Fuse accommodation
001	Horizontal mount PC board fuseholder.	Accommodates CID fuses AA55669/02-001 through AA55569/02-008.
002	Single or stackable (end unit) vertical mount PC board fuseholder.	
003	Stackable vertical mount PC board fuseholder.	

3.6 Ambient temperature. The operating temperature shall be -40° C to +85° C.

3.7 PC board compatibility. Fuseholders supplied to this CID shall be compatible with a standard 1.57 mm (.062 inch) PC board thickness.

3.8 Mounting. Three fuseholders can be mounted side by side (stacked) and operated at rated current.

3.9 Marking. Fuseholders supplied to this CID shall be marked with the manufacturer's (MFGR) standard commercial PIN.

4. QUALITY ASSURANCE PROVISIONS. Quality assurance provisions shall be as specified in A-A-55570.

5. PACKAGING. Packaging shall be as specified in A-A-55570.

6. NOTES.

6.1 PIN. The PIN should be used for Government purposes to buy commercial products to this CID. See section 2 for PIN format.

6.2 CAGE code. For ordering purposes, inventory control, and submission of these fuse cartridges to DESC under the Military Parts Control Advisory Group (MPCAG) evaluation program, CAGE code 58536 should be used.

6.3 Source of documents.

Commercial Item Description

A-A-55570 - Fuseholder, Which Accommodates, Automotive Blade Type, Inclosed Link Fuses, General Requirements for.

A-A-55569/2 - Fuse, Inclosed Link, Fast Acting, 2 Through 30 Amperes (A), Miniature, Automotive Blade Type.

(Copies of commercial item descriptions are available from the Defense Printing Service Detachment Office, Building 4D (Customer Service), 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.

Other Publications

UNDERWRITERS LABORATORIES, INCORPORATED (UL)

UL 94 - Safety Tests for Flammability of Plastic Materials for Parts in Devices and Appliances, Standard For.

(Application for copies should be addressed to the Underwriters Laboratories, Incorporated, 333 Pfingsten Road, Northbrook, IL 60062-2096.)

(Industry association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

6.4 Ordering data. Ordering data shall be as specified in A-A-55570.

6.5 Commercial products. As part of the market analysis and research effort, this CID was coordinated with the following manufacturers of commercial products. At the time of CID preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the MFGR shown.)

MFGR's CAGE	MFGR's name and address
75915	Littelfuse Incorporated 800 E. Northwest Highway Des Plaines, IL 60016-3096 (312) 824-1188

6.6 Part number (P/N) supersession data. This CID supersedes the following MFGRs P/N as shown. This information is being provided to assist in reducing proliferation in the government inventory system.

CID dash number (see table I) AA55570/03-	MFGRs CAGE	MFGRs PIN 1/
001	75915	153007
002	75915	153008
003	75915	153009

1/ The MFGR PIN shall not be used for procurement to the requirements of this CID. At the time of preparation of this CID, the aforementioned commercial products were reviewed and could be replaced by the CID PIN shown.

6.7 Government users. To acquire information on obtaining these fuseholders from the Government inventory system, contact Defense Electronics Supply Center, ATTN: DESC-EOM, 1507 Wilmington Pike, Dayton, OH 45444-5519, or telephone (513) 296-5106.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodians:
Navy - EC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - 7FXE

Preparing Activity:

DLA-ES

Project 5920-0537-03

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.