[INCH-POUND]
A-A-55571/2E
7 May 2009
SUPERSEDING
A-A-55571/2D
May 4, 2008

COMMERCIAL ITEM DESCRIPTION
SPECIFICATION SHEET

CIRCUIT BREAKER, 28 VOLTS (V) DC, MANUAL RESET, WATERPROOF, 15 AMPERES (A) TO 30 A

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

The complete requirements for procuring the circuit breakers described herein shall consist of this document and the issue in effect of CID A-A-55571.

CLASSIFICATION/PART OR IDENTIFICATION NUMBER (PIN). This commercial item description (CID) specification sheet uses a classification system which is included in the PIN as shown in the following example (see NOTES).

AA55571	/02	-	001
CID number	Applicable CID specification sheet (two digits)		Dash number

SALIENT CHARACTERISTICS.

Interface and physical dimensions. Circuit breakers supplied to this CID specification sheet shall be as specified herein (see figure 1).

Ampere rating. The ampere rating shall be as specified in table I.

Voltage rating. The voltage rating shall be 28 V dc maximum.

Endurance. The minimum expected cycling life shall be 500 cycles at 200 percent of rated current.

TABLE I. Characteristics.

CID dash number AA55571/02-	Ampere rating
001	15
002	20
003	25
004	30

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.

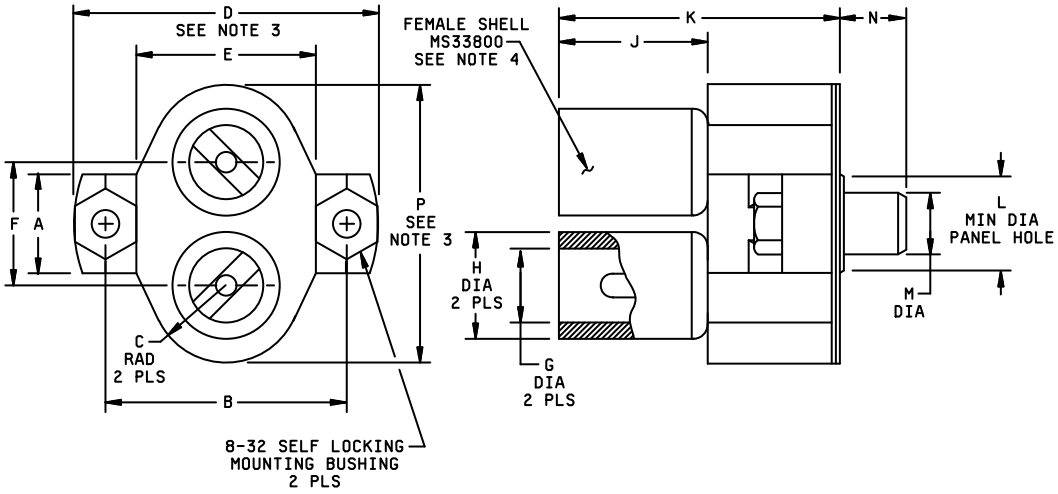

Ltr	Inches		mm	
	Min	Max	Min	Max
A	.593	.657	15.06	16.69
B	1.566	1.582	39.78	40.08
C	.484	.548	12.29	13.92
D	1.968	2.032	49.99	51.61
E	1.155	1.219	29.34	30.96
F	.811	.875	20.60	22.23
G	.438	.502	11.13	12.75
H	.668	.732	16.97	18.59
J	.928	.992	23.57	25.20
K	---	1.875	---	47.63
L	.562	---	14.27	---
M	.408	.472	10.36	11.99
N	.468	.532	11.89	13.51
P	1.784	1.848	45.31	46.94

NOTES:

1. Dimensions are in inches.
2. Tolerance is ±.032 inch (0.81 mm), unless otherwise specified.
3. Dimension excludes flexible gasket material.
4. Shell female MS33800 mates with MS27143 or MS27144.

FIGURE I. Configuration and dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.

Speed of operation at 25°C (77°F) at 200 percent rated current. Circuit breakers supplied to this CID specification sheet shall meet the minimum and maximum opening time requirements as specified in table II.

TABLE II. Speed of operation at 25°C (77°F).

200 percent of rated current	Opening time in seconds	
	Minimum	Maximum
	8	50

NOTES.

PIN. The PIN should be used for Government purposes to buy commercial products to this CID specification sheet. See classification information for PIN format example.

Source of document.

DEPARTMENT OF DEFENSE SPECIFICATIONS

MS33800 - Connector, Receptacle, Electrical, PIN Contact No. 8, 12, 14 and 16 AWG, Waterproof

MS27143 - Connector, Plug, Electrical, Socket Contact, No. 12 AWG, Waterproof

MS27144 - Connector, Plug, Electrical, Socket Contact, No. 14 And 16 AWG, Waterproof

(Copies of this document is available online at http://assist.daps.dla.mil/quicksearch/ or http://assist.daps.dla.mil or from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094)

Commercial products. As part of the market analysis and research effort, this CID specification sheet was coordinated with the following manufacturers of commercial products. At the time of CID specification sheet preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID specification sheet. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown.)

MFR's CAGE	MFR's name and address
82647	Sensata Technologies, Incorporated Precision Products Division P.O. Box 2964 Attleboro, MA 02703-0964 Phone number (508) 236-3528 Facsimile number (508) 236-1598 E-mail: mailto:customerservice@sensata.com Uniform Resource Locator (URL): http://www.sensata.com

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.

Part number (P/N) supersession data. These CID specification sheet PINs supersede the following MFR's P/N's as shown. This information is being provided to assist in reducing proliferation in the Government inventory system.

TABLE III. P/N supersession data.

Dash number (see table I) AA55571/02-	MFR's CAGE	MFR's P/N 1/
001	82647	9115-6-15
002	82647	9115-6-20
003	82647	9115-6-25
004	82647	9115-6-30

1/ The manufacturer's P/N shall not be used for procurement to the requirements of this CID specification sheet. At the time of preparation of this CID specification sheet, the aforementioned commercial products were reviewed and could be replaced by the CID P/N shown. For actual part marking requirements, see the marking paragraph of A-A-55571.

National stock number (NSN). The following is a list of NSN's assigned which correspond to this CID specification sheet. The list is for information only and may not be indicative of all possible NSN's associated with the CID specification sheet. For up to date information on assigned NSN's, please contact the aforementioned DSCC office listed in A-A-55571.

TABLE IV. NSN's.

Dash number (see table I) AA55571/02-	NSN
001	5925-00-894-8015
002	N/A
003	N/A
004	N/A

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

MILITARY INTERESTS:

Custodians:
Navy - EC
DLA - CC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - FSS

Preparing activity:

DLA-CC

Project 5925-2009-022

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.