[INCH-POUND]
A-A-55571/4
June 24, 1996

COMMERCIAL ITEM DESCRIPTION

CIRCUIT BREAKER, 28 VOLTS (V) DC, MANUAL RESET, NONWATERPROOF, 35 AMPERES (A)TO 150 A

The General Services Administration has authorized the use of this commercial item description (CID) for all federal agencies.

1. SCOPE. This CID covers the general requirements for manual reset, nonwaterproof, circuit breakers rated at 28 V dc, 35 A to 150 A. Circuit breakers covered by this CID are intended for commercial/industrial applications.

2. CLASSIFICATION. This CID uses a classification system which is included in the Part or Identification Number (PIN). The PIN shall be AA55571/04- (plus a dash number from table I). Complete PIN example: AA55571/04-002 (see 6.1).

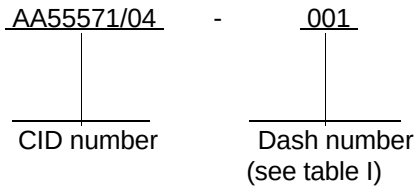

3. SALIENT CHARACTERISTICS

3.1 Design and construction. Circuit breakers supplied to this CID shall be as specified herein (see figure 1).

3.2 Ampere rating. The ampere rating shall be as specified in table I.

3.3 Voltage rating. The voltage rating shall be 28 V dc maximum.

3.4 Endurance. The minimum expected cycling life shall be 500 cycles at 200 percent of rated current.

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any data which may improve this document should be sent to: Defense Electronics Supply Center, ATTN: DESC-ELDM, 1507 Wilmington Pike, Dayton, OH 45444-5765, or telephone (513) 296-6189, or facsimile (FAX) (513) 296-8868.

AMSC N/A FSC 5925

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.

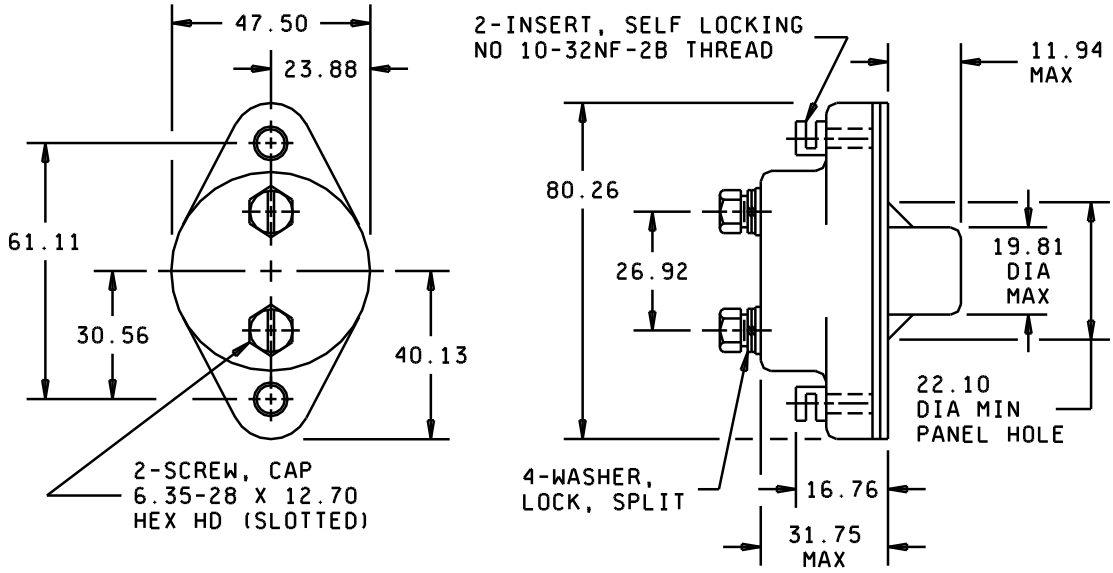

mm	Inches	mm	Inches
6.35	0.25	26.92	1.06
11.94	0.47	30.56	1.203
12.70	0.50	31.75	1.25
16.76	0.66	40.13	1.58
19.81	0.78	47.50	1.87
22.10	0.87	61.11	2.41
23.88	0.94	80.26	3.16

NOTES:

1. Dimensions are in millimeters.
2. Tolerance is ±0.13 mm (.005 inch), unless otherwise specified.
3. The US Government preferred system of measurement is the metric SI system. However, this item was originally designed using inch-pound units of measurement. In the event of conflict between the metric and inch-pound units, the inch-pound units shall take precedence.

Figure 1. Configuration and dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.

TABLE I. Characteristics.

CID dash number AA55571/04-	Ampere rating	CID dash number AA55571/04-	Ampere rating
001	35	007	80
002	40	008	90
003	45	009	105
004	50	010	120
005	60	011	135
006	70	012	150

3.5 Speed of operation at 25° C (77° F) at 200 percent of rated current. Circuit breakers supplied to this CID shall meet the minimum and maximum opening time requirements as specified in table II.

TABLE II. Speed of operation at 25° C (77° F).

200 percent of rated current	Opening time in seconds	
	Minimum	Maximum
	8	100

3.6 Marking. Circuit breakers supplied to this CID shall be marked with the manufacturer's (MFGRs) standard commercial PIN.

4. QUALITY ASSURANCE PROVISIONS. Quality assurance provisions shall be as specified in A-A-55571.

5. PACKAGING. Packaging shall be as specified in A-A-55571.

6. NOTES.

6.1 PIN. The PIN should be used for Government purposes to buy commercial products to this CID. See section 2 for PIN format.

6.2 CAGE code. For ordering purposes, inventory control, and submission of these circuit breakers to DESC under the Military Parts Control Advisory Group (MPCAG) evaluation program, CAGE code 58536 should be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.

6.3 Source of document.

Commercial Item Description

A-A-55571 - Circuit Breaker, 28 Volts (V) DC, Manual and Automatic Reset, General Requirements for.

(Copies of commercial item descriptions are available from the Defense Printing Service Detachment Office, Building 4D (Customer Service), 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

6.4 Ordering data. Ordering data shall be as specified in A-A-55571.

6.5 Commercial products. As part of the market analysis and research effort, this CID was coordinated with the following MFGRs of commercial products. At the time of CID preparation and coordination, these MFGRs were known to have commercial products that would meet the requirements of this CID. (NOTE: This information should not be considered as a list of approved MFGRs or be used to restrict procurement to only the MFGRs shown.)

MFGR's CAGE	MFGR's name and address
82647	Texas Instruments Incorporated 34 Forest Street Attleboro, MA 02703-0964 (508) 236-3286

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.

6.6 Part number (P/N) supersession data. This CID supersedes the following MFGRs P/Ns as shown. This information is being provided to assist in reducing proliferation in the government inventory system.

Dash number (see table I) AA55571/04-	MFGR CAGE	MFGR P/N 1/
001	82647	PDLM-35-I
002	82647	PDLM-40-I
003	82647	PDLM-45-I
004	82647	PDLM-50-I
005	82647	PDLM-60-I
006	82647	PDLM-70-I
007	82647	PDLM-80-I
008	82647	PDLM-90-I
009	82647	PDLM-105-I
010	82647	PDLM-120-I
011	82647	PDLM-135-I
012	82647	PDLM-150-I

1/ The MFGRs P/N shall not be used for procurement to the requirements of this CID. At the time of preparation of this CID, the aforementioned commercial products were reviewed and could be replaced by the CID PIN shown.

6.7 Government users. To acquire information on obtaining these circuit breakers from the Government inventory system, contact Defense Electronics Supply Center, ATTN: DESC-EOM, 1507 Wilmington Pike, Dayton, OH 45444-5519, or telephone (513) 296-5106.

MILITARY INTERESTS:

Custodians:
Army - AT
Navy - EC
Air Force - 85

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - 7FXE

Preparing Activity:

DLA-ES

Project 5925-0252-04

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.