[INCH-POUND]
A-A-55571/4D
July 3, 2008
SUPERSEDING
A-A-55571/4C
October 17, 2007

COMMERCIAL ITEM DESCRIPTION
SPECIFICATION SHEET

CIRCUIT BREAKER, 28 VOLTS (V) DC, MANUAL RESET, WATERPROOF, 35 AMPERES (A) TO 150 A

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

The complete requirements for procuring the circuit breakers described herein shall consist of this document and the issue in effect of CID A-A-55571.

CLASSIFICATION/PART OR IDENTIFICATION NUMBER (PIN). This commercial item description (CID) specification sheet uses a classification system which is included in the PIN as shown in the following example (see NOTES).

AA55571	/04	-	001
CID number	Applicable CID specification sheet (two digits)		Dash number

SALIENT CHARACTERISTICS.

Interface and physical dimensions. Circuit breakers supplied to this CID specification sheet shall be as specified herein (see figure 1).

Ampere rating. The ampere rating shall be as specified in table I.

Voltage rating. The voltage rating shall be 28 V dc maximum.

Endurance. The minimum expected cycling life shall be 500 cycles at 200 percent of rated current.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.

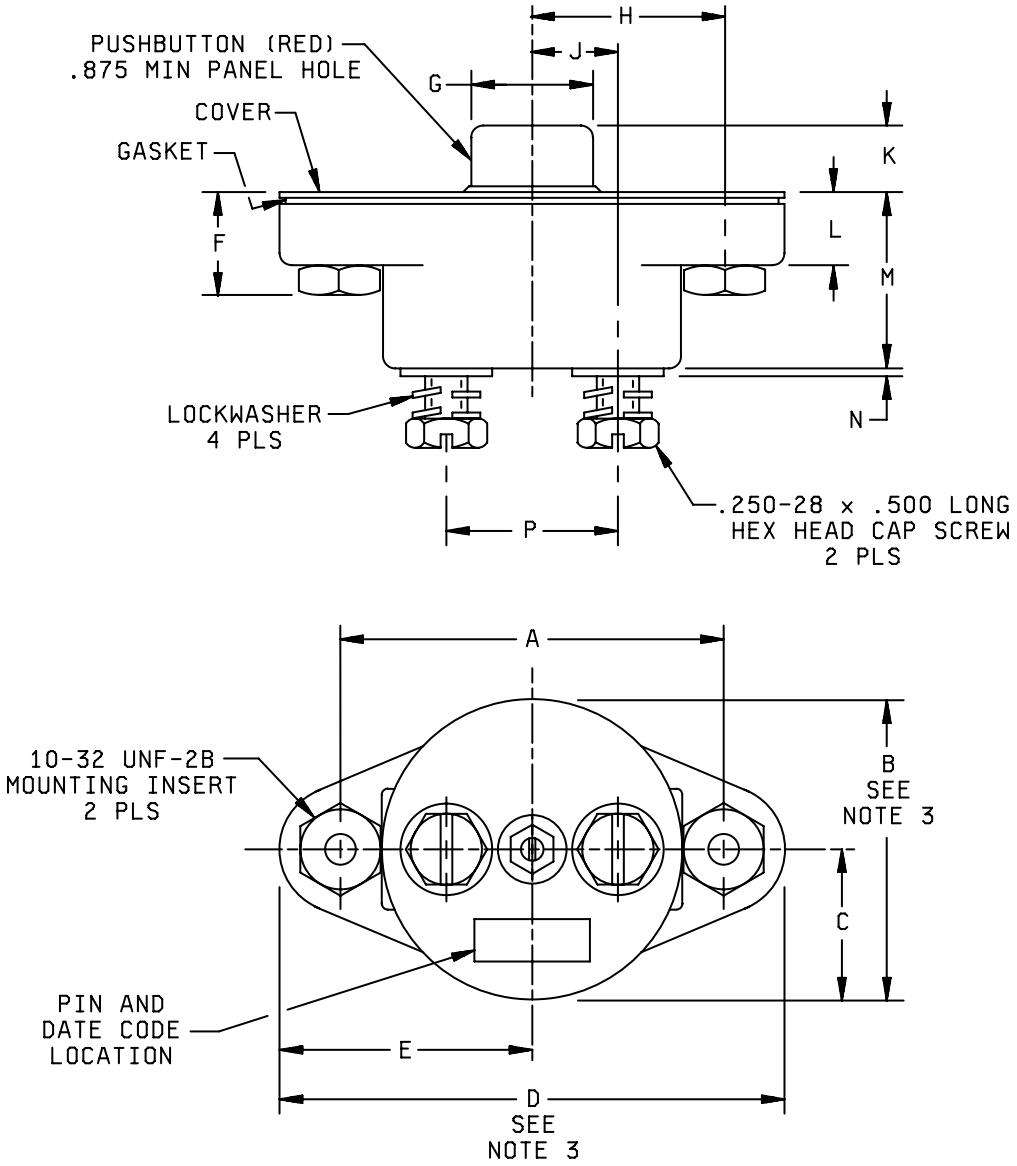

FIGURE 1. Configuration and dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.

Ltr	Inches		mm	
	Min	Max	Min	Max
A	2.396	2.416	60.86	61.37
B	1.859	1.891	47.22	48.03
C	.922	.954	23.42	24.23
D	3.125	3.187	79.38	80.95
E	1.562	1.594	39.67	40.49
F	.622	.686	15.80	17.42
G	N/A	.781	N/A	19.84
H	1.193	1.213	30.30	30.81
J	.526	.536	13.36	14.22
K	.336	.400	8.53	10.16
L	.437	.469	11.10	11.91
M	1.078	1.140	27.38	28.96
N	.031	.063	0.79	1.60
P	1.052	1.072	26.72	27.23

NOTES:

1. Dimensions are in inches.
2. Tolerance is ±.005 inch (0.13 mm), unless otherwise specified.
3. Dimensions exclude flexible gasket material.

FIGURE 1. Configuration and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.

TABLE I. Characteristics.

CID dash number AA55571/04-	Ampere rating	CID dash number AA55571/04-	Ampere rating
001	35	007	80
002	40	008	90
003	45	009	105
004	50	010	120
005	60	011	135
006	70	012	150

Speed of operation at 25°C (77°F) at 200 percent rated current. Circuit breakers supplied to this CID specification sheet shall meet the minimum and maximum opening time requirements as specified in table II.

TABLE II. Speed of operation at 77°F (25°C).

200 percent of rated current	Opening time in seconds	
	Minimum	Maximum
	8	100

NOTES.

PIN. The PIN should be used for Government purposes to buy commercial products to this CID specification sheet. See classification information for PIN format example.

Commercial products. As part of the market analysis and research effort, this CID was coordinated with the following manufacturers of commercial products. At the time of CID preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown.)

MFR's CAGE	MFR's name and address
4G0W8	Sensata Technologies, Incorporated Precision Products Division P.O. Box 2964 Attleboro, MA 02703-0964 Phone number (508) 236-3528 Facsimile number (508) 236-1598 E-mail: mailto:customerservice@sensata.com Uniform Resource Locator (URL): http://www.sensata.com

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.

Part number (P/N) supersession data. These CID specification sheet PINs supersede the following MFR's P/N's as shown. This information is being provided to assist in reducing proliferation in the Government inventory system.

TABLE III. P/N supersession data.

CID dash number (see table I) AA55571/04-	MFR's CAGE	MFR's P/N 1/
001	82647	PDLM-35-I
002	82647	PDLM-40-I
003	82647	PDLM-45-I
004	82647	PDLM-50-I
005	82647	PDLM-60-I
006	82647	PDLM-70-I
007	82647	PDLM-80-I
008	82647	PDLM-90-I
009	82647	PDLM-105-I
010	82647	PDLM-120-I
011	82647	PDLM-135-I
012	82647	PDLM-150-I

1/ The manufacturer's P/N shall not be used for procurement to the requirements of this CID specification sheet. At the time of preparation of this CID specification sheet, the aforementioned commercial products were reviewed and could be replaced by the CID P/N shown. For actual part marking requirements, see the marking paragraph of A-A-55571.

National stock number (NSN). The following is a list of NSN's assigned which correspond to this CID specification sheet. The list is for information only and may not be indicative of all possible NSN's associated with the CID specification sheet. For up to date information on assigned NSN's, please contact the aforementioned DSCC office listed in A-A-55571.

TABLE IV. NSN's.

Dash number (see table I) AA55571/04-	NSN	Dash number (see table I) AA55571/04-	NSN
001	N/A	007	N/A
002	N/A	008	5925-01-429-3850
003	N/A	009	N/A
004	N/A	010	N/A
005	N/A	011	N/A
006	5925-01-430-0026	012	N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

MILITARY INTERESTS:

Custodians:
Navy - EC
DLA - CC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - FSS

Preparing activity:

DLA-CC

Project 5925-2008-009

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.