[INCH-POUND]
A-A-55571/5D
October 3, 2008
SUPERSEDING
A-A-55571/5C
October 17, 2007

COMMERCIAL ITEM DESCRIPTION
SPECIFICATION SHEET

# CIRCUIT BREAKER, 28 VOLTS (V) DC, AUTOMATIC RESET, NONWATERPROOF, 10 AMPERES (A) TO 35 A

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

The complete requirements for procuring the circuit breakers described herein shall consist of this document and the issue in effect of CID A-A-55571.

CLASSIFICATION/PART OR IDENTIFICATION NUMBER (PIN). This commercial item description (CID) specification sheet uses a classification system which is included in the PIN as shown in the following example (see NOTES).

| AA55571 | /05 | - | 001 |
|---|---|---|---|
| CID number | Applicable CID specification sheet (two digits) | | Dash number |

SALIENT CHARACTERISTICS.

Interface and physical dimensions. Circuit breakers supplied to this CID specification sheet shall be as specified herein (see figure 1).


Ampere rating. The ampere rating shall be as specified in table I.

Voltage rating. The voltage rating shall be 28 V dc maximum.

Endurance. The minimum expected cycling life shall be 2,000 cycles at 200 percent of rated current.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.

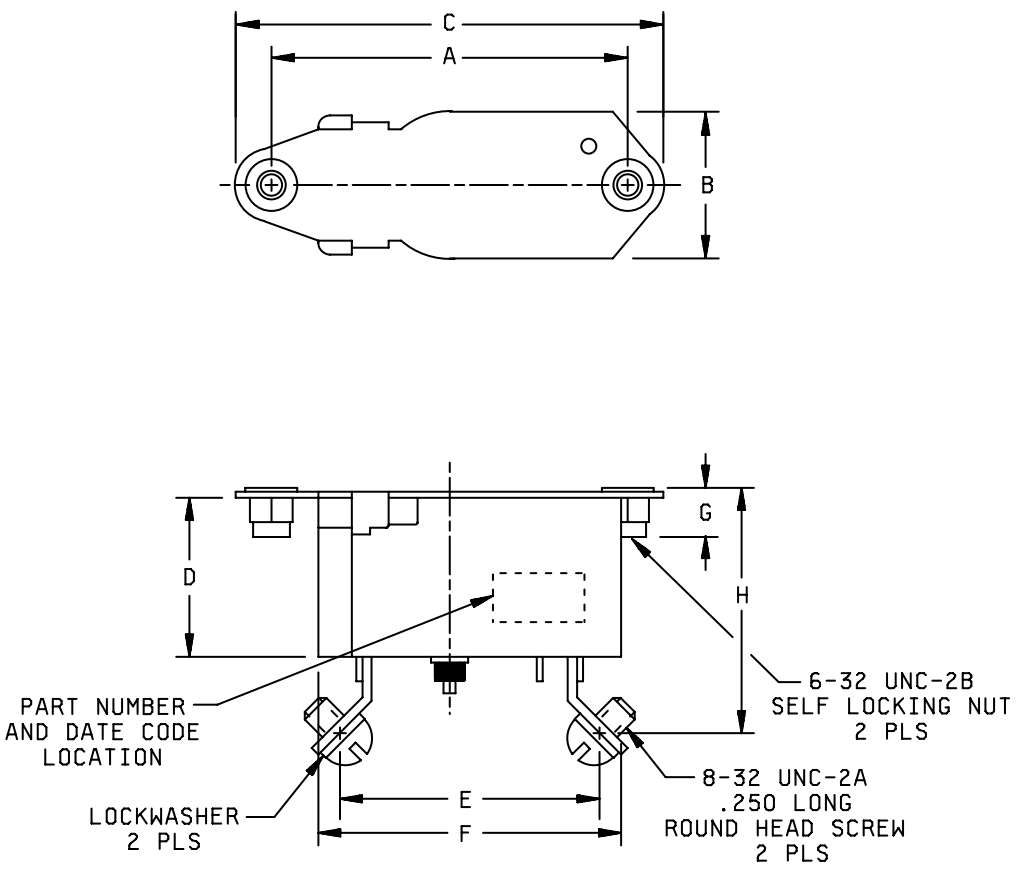


AA55571/05-001 (10 ampere rating)

FIGURE 1. Configuration and dimensions.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.

| Ltr | Inches | | mm | |
|---|---|---|---|---|
| | Min | Max | Min | Max |
| A | 1.781 | 1.843 | 45.24 | 46.81 |
| B | 0.729 | 0.791 | 18.52 | 20.09 |
| C | 2.151 | 2.213 | 54.64 | 56.21 |
| D | 0.782 | 0.844 | 19.86 | 21.44 |
| E | 1.203 | 1.265 | 30.56 | 32.10 |
| F | 1.539 | 1.601 | 39.09 | 40.67 |
| G | 0.219 | 0.281 | 5.56 | 7.14 |
| H | 1.203 | 1.265 | 30.56 | 32.13 |

AA55571/05-001 (10 ampere rating)


NOTES:

1. Dimensions are in inches.
2. Tolerance is ±.031 inch (0.79 mm), unless otherwise specified.

FIGURE 1. Configuration and dimensions - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.

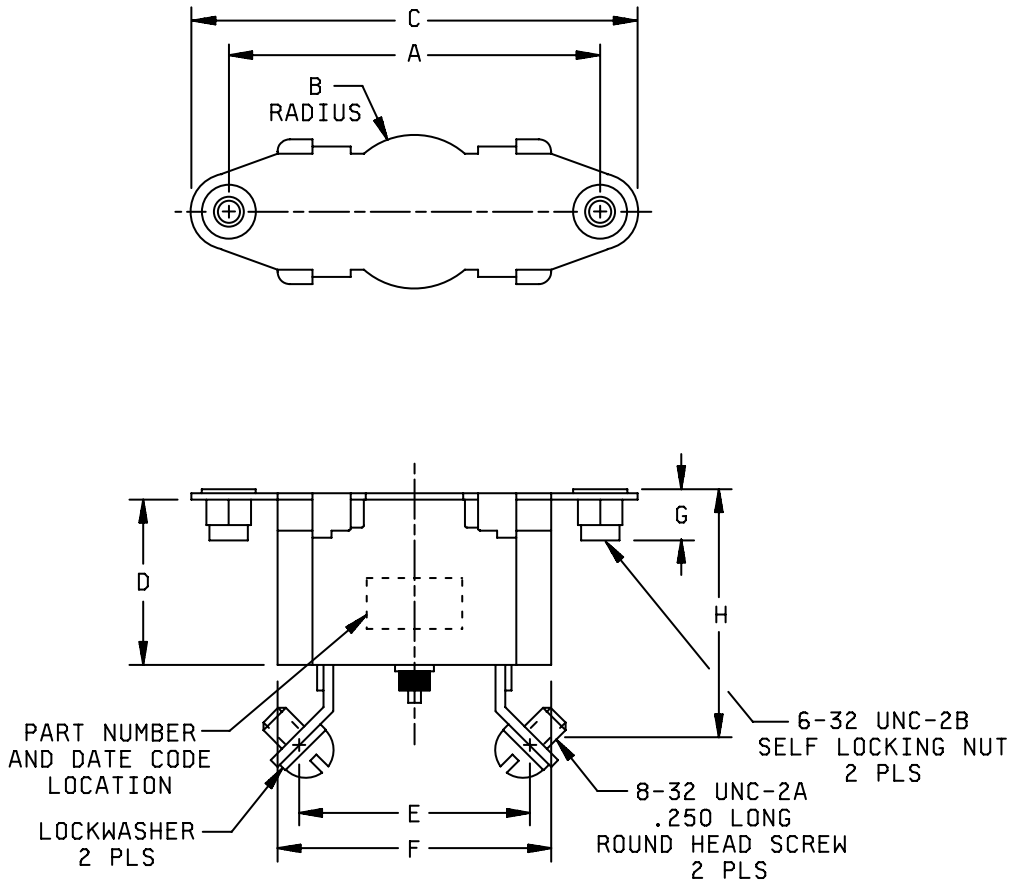


AA55571/05-002 through -006 (15 ampere through 35 ampere rating)

FIGURE 2. Configuration and dimensions.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.

| Ltr | Inches | | mm | |
|---|---|---|---|---|
| | Min | Max | Min | Max |
| A | 1.781 | 1.843 | 45.24 | 46.81 |
| B | 0.344 | 0.406 | 8.74 | 10.31 |
| C | 2.159 | 2.221 | 54.84 | 56.41 |
| D | 0.782 | 0.844 | 19.86 | 21.44 |
| E | 1.000 | 1.062 | 25.40 | 26.97 |
| F | 1.282 | 1.344 | 32.56 | 34.14 |
| G | 0.219 | 0.281 | 5.56 | 7.14 |
| H | 1.203 | 1.265 | 30.56 | 32.13 |

AA55571/05-002 through -006 (15 ampere through 35 ampere rating)

NOTES:

1. Dimensions are in inches.
2. Tolerance is ±.031 inch (0.79 mm), unless otherwise specified.

FIGURE 2. Configuration and dimensions - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.

TABLE I. Characteristics.

| CID dash number AA55571/05- | Ampere rating |
|---|---|
| 001 | 10 |
| 002 | 15 |
| 003 | 20 |
| 004 | 25 |
| 005 | 30 |
| 006 | 35 |

Speed of operation at 25°C (77°F) at 200 percent rated current. Circuit breakers supplied to this CID specification sheet shall meet the minimum and maximum opening time requirements as specified in table II.

TABLE II. Speed of operation at 77°F (25°C).

| | Opening time in seconds | | |
|---|---|---|---|
| 200 percent of rated current | Ampere rating | Minimum | Maximum |
| | 10 A and below | 20 | 150 |
| | over 10 A | 8 | 50 |

NOTES.

PIN. The PIN should be used for Government purposes to buy commercial products to this CID specification sheet. See classification information for PIN format example.

Commercial products. As part of the market analysis and research effort, this CID specification sheet was coordinated with the following manufacturers of commercial products. At the time of CID specification sheet preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID specification sheet. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown.)

| MFR's CAGE | MFR's name and address |
|---|---|
| 4G0W8 | Sensata Technologies, Incorporated<br>Precision Products Division<br>P.O. Box 2964<br>Attleboro, MA 02703-0964<br>Phone number (508) 236-3528<br>Facsimile number (508) 236-1598<br>E-mail: mailto:customerservice@sensata.com<br>Uniform Resource Locator (URL): http://www.sensata.com |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.

Part number (P/N) supersession data. These CID specification sheet PINs supersede the following MFR's P/N's as shown. This information is being provided to assist in reducing proliferation in the Government inventory system.

TABLE III. P/N supersession data.

| CID dash number (see table I) AA55571/05- | MFR's CAGE | MFR's P/N 1/ |
|---|---|---|
| 001 | 82647 | PSA-10 |
| 002 | 82647 | PSA-15 |
| 003 | 82647 | PSA-20 |
| 004 | 82647 | PSA-25 |
| 005 | 82647 | PSA-30 |
| 006 | 82647 | PSA-35 |

1/ The manufacturer's P/N shall not be used for procurement to the requirements of this CID specification sheet. At the time of preparation of this CID specification sheet, the aforementioned commercial products were reviewed and could be replaced by the CID P/N shown. For actual part marking requirements, see the marking paragraph of A-A-55571.

National stock number (NSN). The following is a list of NSN's assigned which correspond to this CID specification sheet. The list is for information only and may not be indicative of all possible NSN's associated with the CID specification sheet. For up to date information on assigned NSN's, please contact the aforementioned DSCC office listed in A-A-55571.

TABLE IV. NSN's.

| Dash number (see table I) AA55571/05- | NSN |
|---|---|
| 001 | 5925-00-549-8937 |
| 002 | 5925-00-929-7718 |
| 003 | 5925-00-929-7719 |
| 004 | 5925-01-373-1034 |
| 005 | 5925-01-417-5088 |
| 006 | N/A |

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodians:
Navy - EC
DLA - CC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - FSS

Preparing activity:

DLA-CC

Project 5925-2008-013

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.