MILITARY SPECIFICATION

MODULES, STANDARD ELECTRONIC

MULTIVIBRATOR, MONOSTABLE, DIGITAL, KEY CODE CDE

This amendment forms a part of MIL-M-28787/122B(EC), dated 31 August 1982, and is approved for use within Space and Naval Warfare Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 7

4.4.2, *delete and substitute the following:*

"4.4.2 Order of testing. Test conditions A through R shall be performed in any order with the following exceptions. Test conditions B, Q, and R are stress tests and will be performed only at 25°C ±5°C. If test conditions B, Q, or R are part of a sequence of tests, the order of testing shall be as follows: B, Q, R where applicable, followed by the remaining tests in the sequence."

4.5.3, line six: Delete "A through P" and substitute "A and C through P".

PAGE 21

TABLE VI: Delete and substitute new table as printed on page 2 of this amendment.

PAGE 30

FIGURE 9, Item PO1-1 block: Add "(SEE NOTE 7)".

FIGURE 9, NOTES, add new note 7: "7. V_{CC} for test conditions F1-F60 is given in table VI. V_{CC} for test conditions G1-G10, H1-H6, J1-J8, and K1-K12 is 4.5 V."

PAGE 31

FIGURE 10: Delete and substitute new figure as printed on page 3 of this amendment.

PAGE 37

FIGURE 12, notes 7, 8, and 9: PW; Delete "(1.5 V level)" (three places) and substitute "(50% PA)" (three places).

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:09Z
Check the source to verify that this is the current version before use.

* TABLE VI. Output pulse width test.

Test condition	Parameter	V_{CC}	Connect							Initial limits 25°C ±5°C ambient		Unit	Test figure
			A to pin	B to pin	C to pin	D to pin	G to pin	H to pin	J to pin	Min	Max		
F1	Q1 Output pulse width (1,000 µs)	5.5	12,13	16, E	8	15, F	19	Open	3	930	1,070	µs	9, 10
F2	$\overline{Q1}$ Output pulse width (1,000 µs)	4.5	12,13	16, E	8	15, F	19	"	5	"	"	"	"
F3	Q2 Output pulse width (1,000 µs)	4.5	24,23	26, E	29	25, F	27	"	37	"	"	"	"
F4	$\overline{Q2}$ Output pulse width (1,000 µs)	5.5	24,23	26, E	29	25, F	27	"	33	"	"	"	"
F5	Q1 Output pulse width (200 µs)	5.5	7	12	14	16	19	3	Open	186	214	"	"
F6	$\overline{Q1}$ Output pulse width (200 µs)	4.5	7	12	14	16	19	5	"	"	"	"	"
F7	Q2 Output pulse width (200 µs)	4.5	24	35	26	28	27	37	"	"	"	"	"
F8	$\overline{Q2}$ Output pulse width (200 µs)	5.5	24	35	26	28	27	33	"	"	"	"	"
F9	Q1 Output pulse width (300 µs)	4.5	14	16	Open	Open	19	3	"	279	321	"	"
F10	$\overline{Q1}$ Output pulse width (300 µs)	5.5	14	16	"	"	19	5	"	"	"	"	"
F11	Q2 Output pulse width (300 µs)	5.5	26	28	"	"	27	37	"	"	"	"	"
F12	$\overline{Q2}$ Output pulse width (300 µs)	4.5	26	28	"	"	27	33	"	"	"	"	"

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:09Z
Check the source to verify that this is the current version before use.

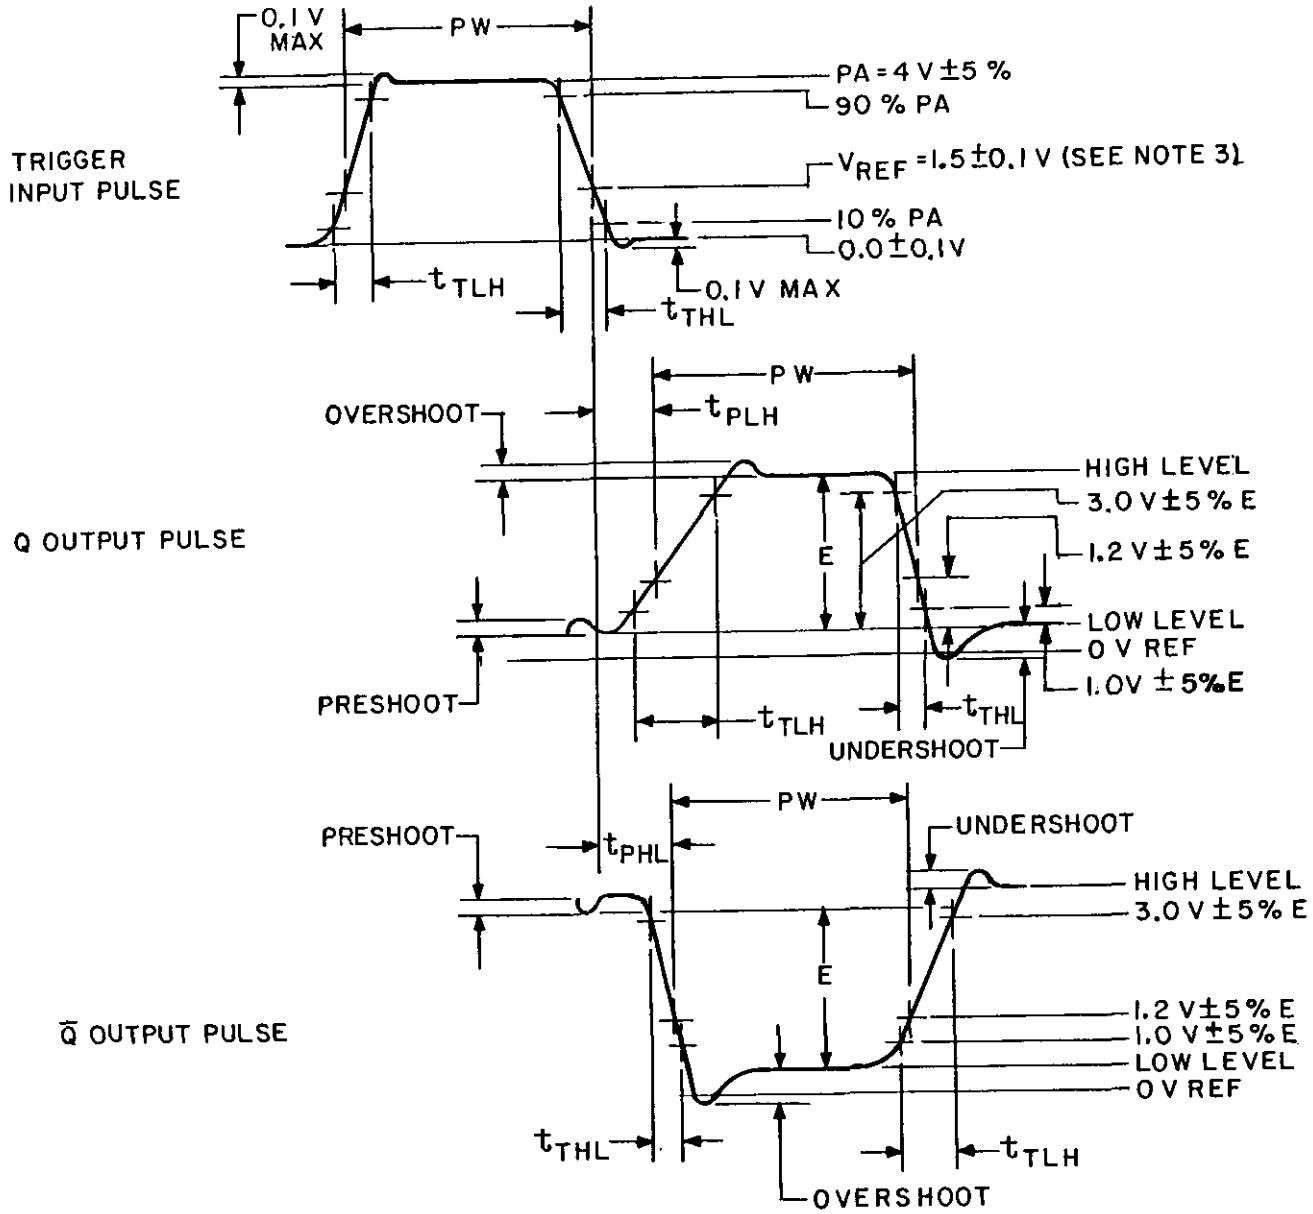


FIGURE 10. Output pulse width, transition time (t_{THL} and t_{TLH}), propagation delay time (t_{PLH} and t_{PHL}), output pulse amplitude (low-level and high-level), output pulse (overshoot, undershoot, preshoot), and input trigger sensitivity and immunity test circuit waveforms for tables VI through X and XII.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:09Z
Check the source to verify that this is the current version before use.

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5963-N703)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:09Z
Check the source to verify that this is the current version before use.