INCH-POUND

MIL-M-28787/126A(SH)
AMENDMENT 2
19 July 1991
SUPERSEDING
AMENDMENT 1
14 November 1983

MILITARY SPECIFICATION

MODULES, STANDARD ELECTRONIC

LOAD, RESISTOR, STANDARD, ANALOG, KEY CODE FLB

This amendment forms a part of Military Specification MIL-M-28787/126A(EC), dated 27 November 1981, and is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense

PAGE 4

* TABLE I, Test condition B6, Acceptance requirements, End-of-life, Max column Delete "115.8" and substitute "215.8".

* TABLE I, Test condition B7, Acceptance requirements, Initial, Max column. Delete "34 01" and substitute "304.01"

* TABLE I, Test condition B7, Operating temperature, Initial, Min column Delete "295 75" and substitute "295.73".

* TABLE I, Test condition B7, Operating temperature, Initial, Max column· Delete "306 25" and substitute "306.27".

* TABLE I, Test condition B11, Acceptance requirements, End-of-life, Max column· Delete "30 68" and substitute "31.68".

* TABLE I, Test condition B13, Acceptance requirements, End-of-life, Min column: Delete "0.475" and substitute "0.9475".

* TABLE I, Test condition B13, Acceptance requirements, End-of-life, Max column. Delete "1.525" and substitute "1 0525"

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:11Z
Check the source to verify that this is the current version before use.

PAGE 5

* TABLE I, Test condition B18, Acceptance requirements, End-of-life, Min column: Delete "194 9" and substitute "194.2".

* TABLE I, Test condition B18, Acceptance requirements, End-of-life, Max column: Delete "215.1" and substitute "215.8".

PAGE 6

* 4.5.3, fourth line: Delete "electrical tests A through C" and substitute "electrical test B".

* 4.5.3, sixth line Delete "electrical test B" and substitute "electrical tests B and C"

6.3: Delete and substitute the following

"6.3 Cross reference of classification. Military Specification MIL-M-28787/126 supersedes Department of the Navy, Naval Ordnance Systems Command Drawing No. 10001-2658650 Part number M28787/126-1 supersedes part numbers 2658650 and M28787/126 "

PAGE 9

* TABLE II, Test condition A4, B to pin column Delete "19-23, 25-28" and substitute "20-23, 25-29".

PAGE 11

* TABLE III, Test condition B7, Initial limits, Max column Delete "34.01" and substitute "304.01".

PAGE 13

FIGURE 4: Delete and substitute new figure 4 as printed on page 4 of this amendment

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:11Z
Check the source to verify that this is the current version before use.


NOTE. The margins of this amendment are marked with an asterisk or vertical lines to indicate where changes (additions, modifications, corrections, deletions) from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.

Preparing activity
Navy – SH

(Project 5963–N773)

Agent NW

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:11Z
Check the source to verify that this is the current version before use.

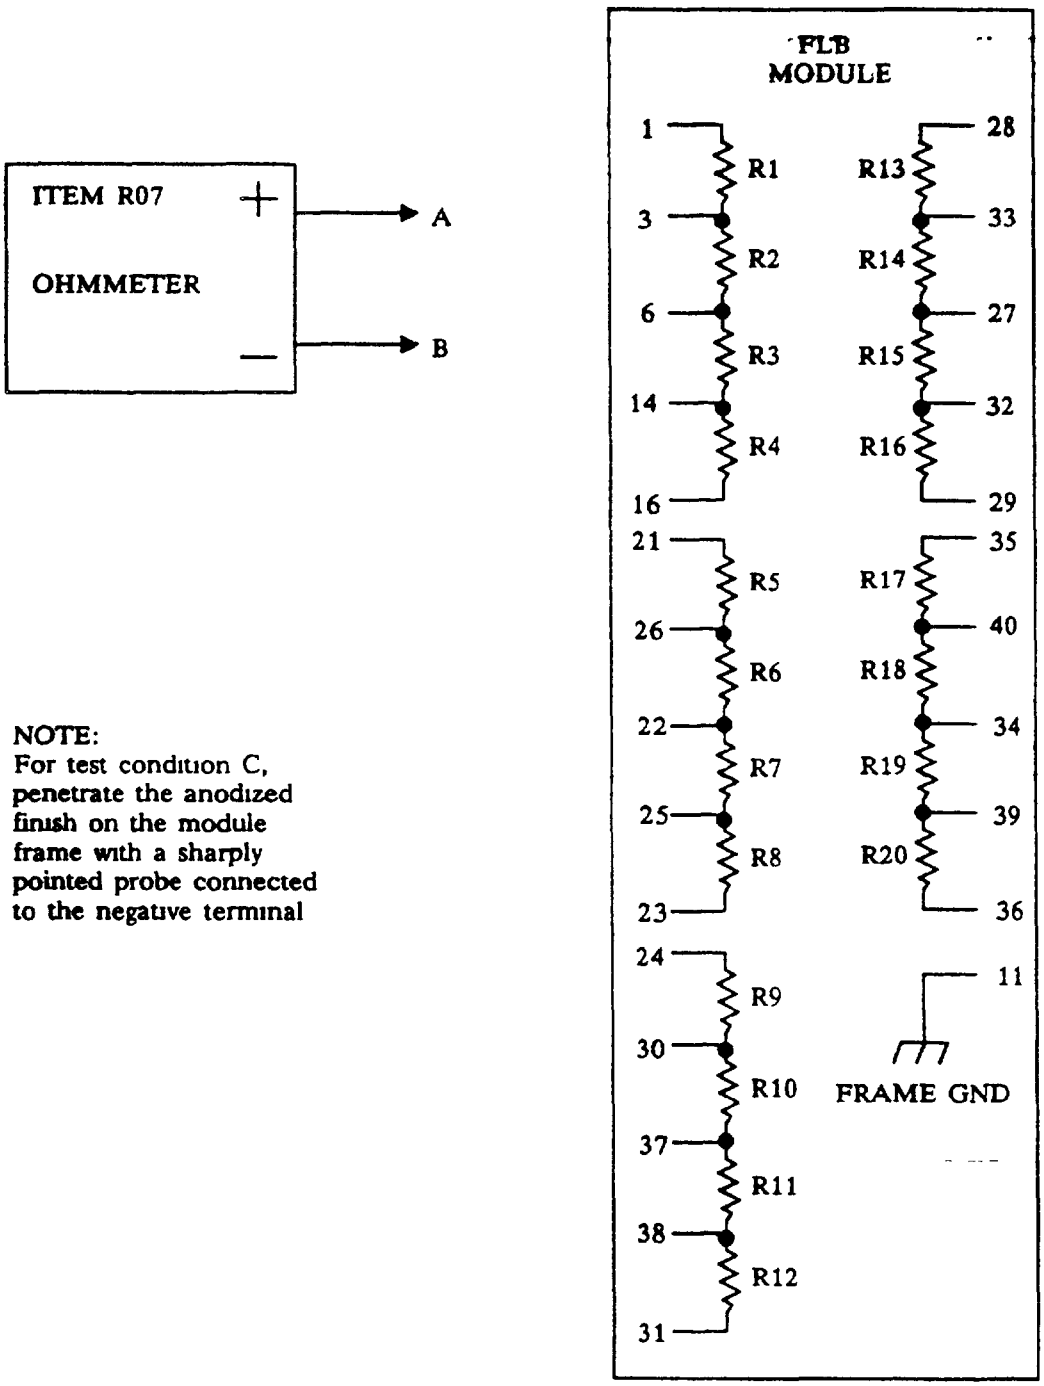

NOTE:
For test condition C, penetrate the anodized finish on the module frame with a sharply pointed probe connected to the negative terminal

FIGURE 4 Resistance and continuity test circuit for tables III and IV

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:11Z
Check the source to verify that this is the current version before use.