MILITARY SPECIFICATION

MODULES, STANDARD ELECTRONIC

ISOLATION MODULE, DIGITAL, KEY CODE EMF

This amendment forms a part of Military Specification MIL-M-28787/129A(EC), dated 21 December 1981, and is approved for use by the Naval Electronic Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 5

6.3, delete and substitute the following:

"6.3 Cross reference of classification. Military Specification MIL-M-28787/129 supersedes Department of the Navy, Naval Ordnance Systems Command Drawing No. 10001-2658639. Part number M28787/129-1 supersedes part numbers 2658639 and M28787/129."

PAGE 7

FIGURE 2: delete and substitute new figure 2 as printed on page 2 of this amendment.

PAGE 11

FIGURE 3: Delete and substitute new figure 3 as printed on page 3 of this amendment.

PAGE 13

FIGURE 4: Delete and substitute new figure 4 as printed on page 4 of this amendment.

PAGE 23

FIGURE 7: Delete and substitute new figure 7 as printed on page 5 of this amendment.

Agent:
DLA - ES

Preparing activity:
Navy - EC

(Project 5963-N590)

FSC 5963

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:12Z
Check the source to verify that this is the current version before use.

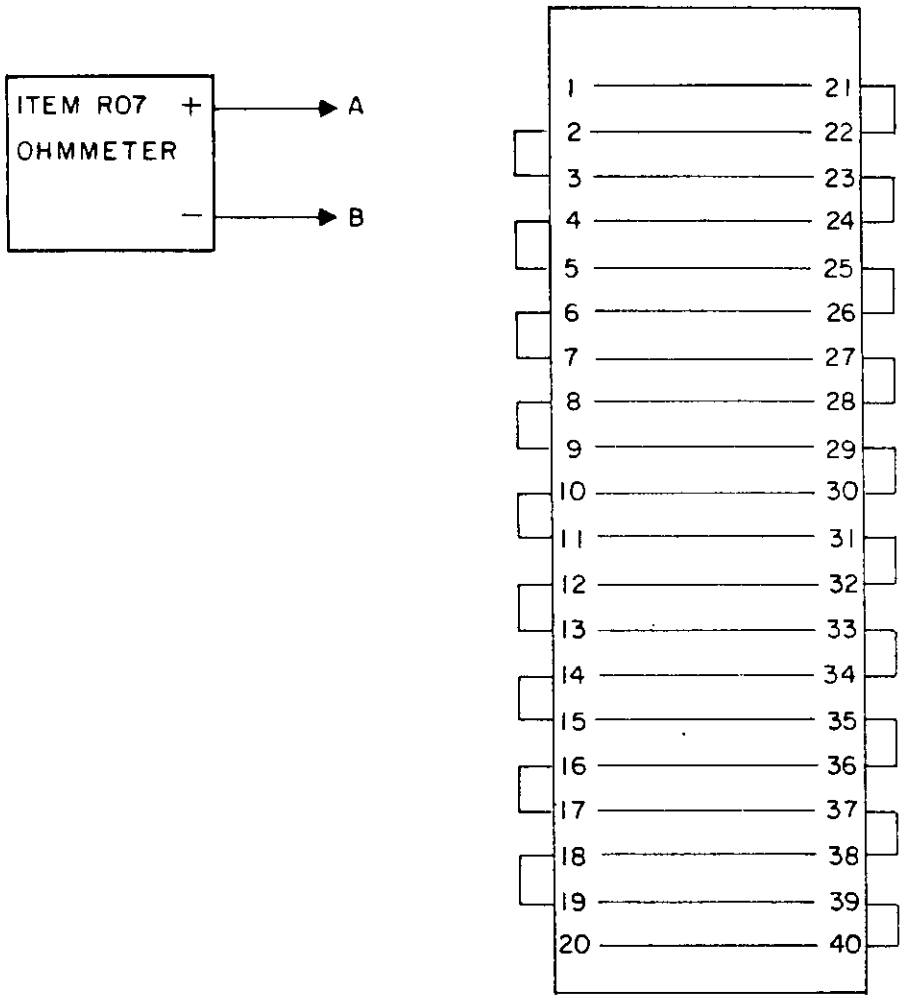


FIGURE 2. Module continuity test circuit for table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:12Z
Check the source to verify that this is the current version before use.


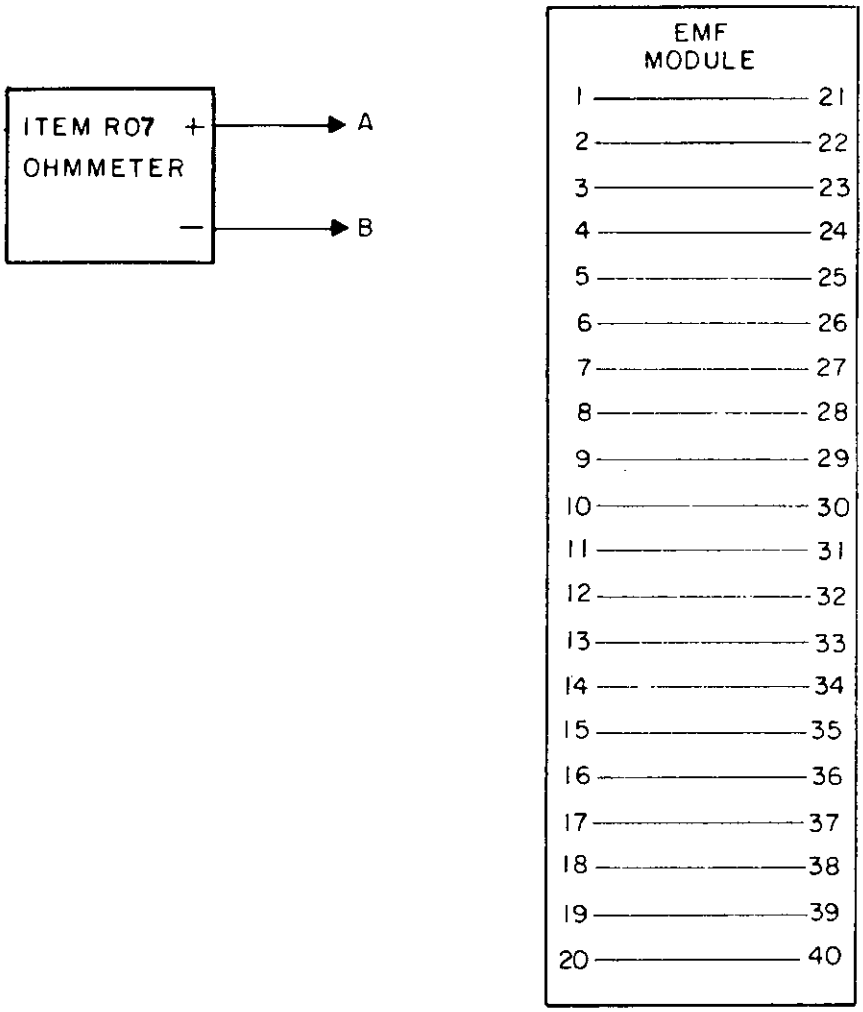


FIGURE 3. Module integrity test circuit for table III.


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:12Z
Check the source to verify that this is the current version before use.

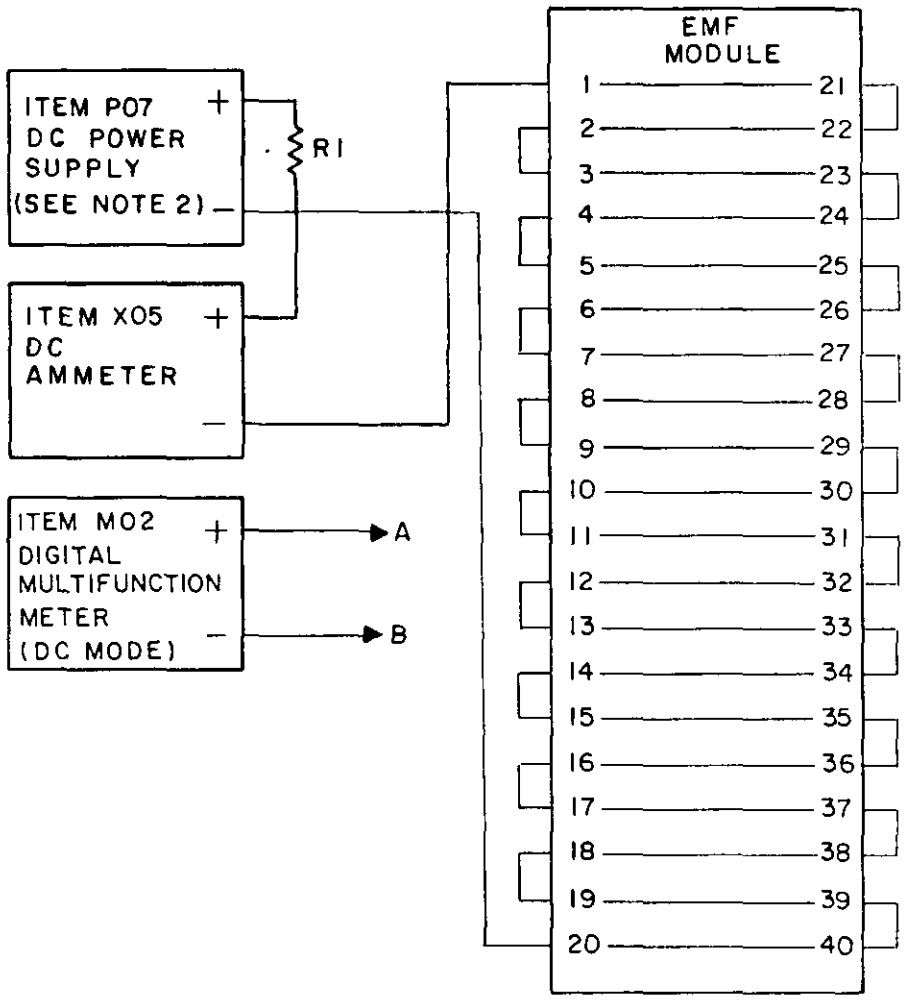

NOTES:
1. R1 = 10Ω ±5%, 15 W.
2. Adjust item P07 so that item X05 reads 1 ampere. The power supply voltage will be approximately 10 V.

FIGURE 4. Jumper resistance check test circuit for table IV.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:12Z
Check the source to verify that this is the current version before use.

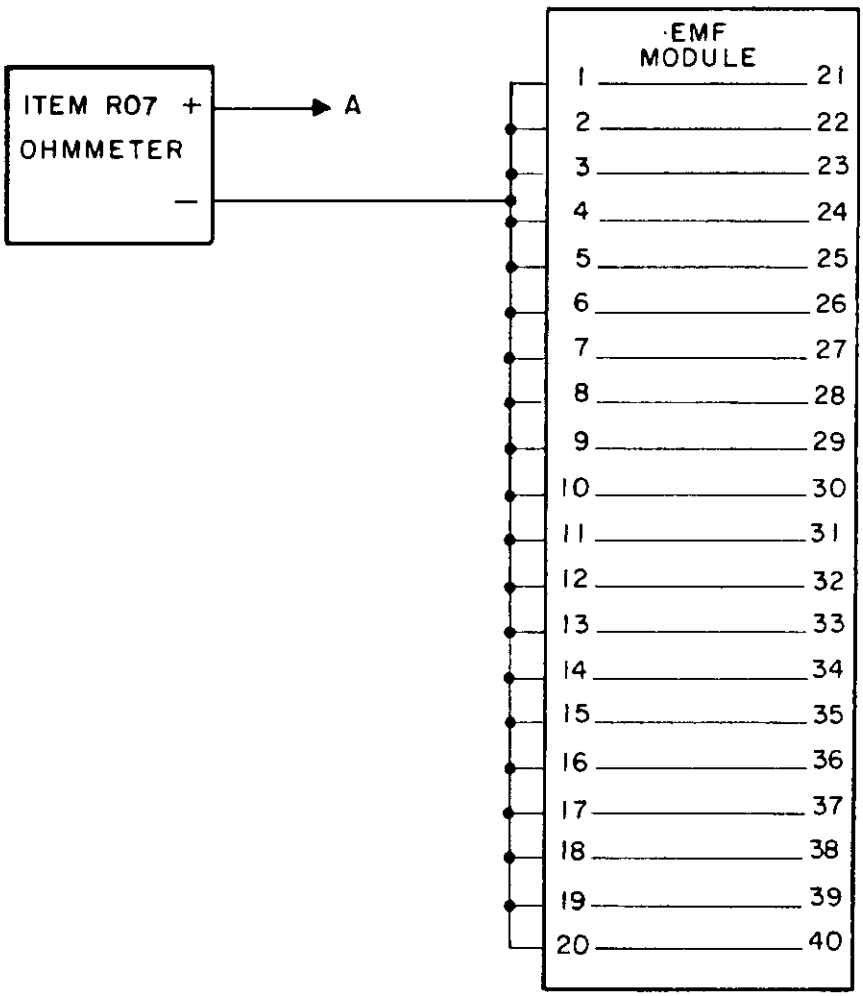

NOTE: Penetrate the anodized finish of the module frame with a sharply pointed probe connected to the positive terminal.

FIGURE 7. Frame integrity test circuit for table VII.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:12Z
Check the source to verify that this is the current version before use.