INCH-POUND

MIL-M-28787/135A(SH)
AMENDMENT 2
19 July 1991
SUPERSEDING
AMENDMENT 1
13 November 1981

MILITARY SPECIFICATION

MODULES, STANDARD ELECTRONIC

INDUCTOR, 1.5 AMPERE, POWER, KEY CODE QPM

This amendment forms a part of Military Specification MIL-M-28787/135A(EC), dated 27 March 1978, and is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense

PAGE 1

Bottom of page: Delete "FSC MISC" and substitute "FSC 5963".

PAGE 3

3.5.8, second line: Delete "M28787/135" and substitute "M28787/135-1".

PAGE 6

* 4.5.1, third line: Delete "A through H" and substitute "A through C, G and H".

* 4.5.1, fifth line: Delete "A through E, G, and H" and substitute "A through C, G, and H"

* 4.5.3, third line: Delete "A through E, G, and H" and substitute "A through C, G, and H"

* 4.5.3, fifth line: Delete "A through H" and substitute "A through C, G, and H".

DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 20261O-20T16:14Z
Check the source to verify that this is the currentversion before use.

Add new paragraph 6.3 as follows:

"6.3 Cross reference of classification Military Specification MIL-M-28787/135 supersedes Department of the Navy, Naval Ordnance Systems Command Drawing No 10001-2658663E dated 14 October 1969. Part number M28787/135-1 supersedes part numbers 2658663 and M28787/135. These parts are interchangeable."

PAGE 10

FIGURE 3· Delete and substitute new figure 3 as printed on page 3 of this amendment

PAGE 14

TABLE IV: Delete and substitute new table IV as printed on page 4 of this amendment


NOTE The margins of this amendment are marked with an asterisk or vertical lines to indicate where changes (additions, modifications, corrections, deletions) from the previous amendment were made This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment

Preparing activity
Navy - SH

(Project 5963-N819)

Agent NW

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:14Z
Check the source to verify that this is the current version before use.

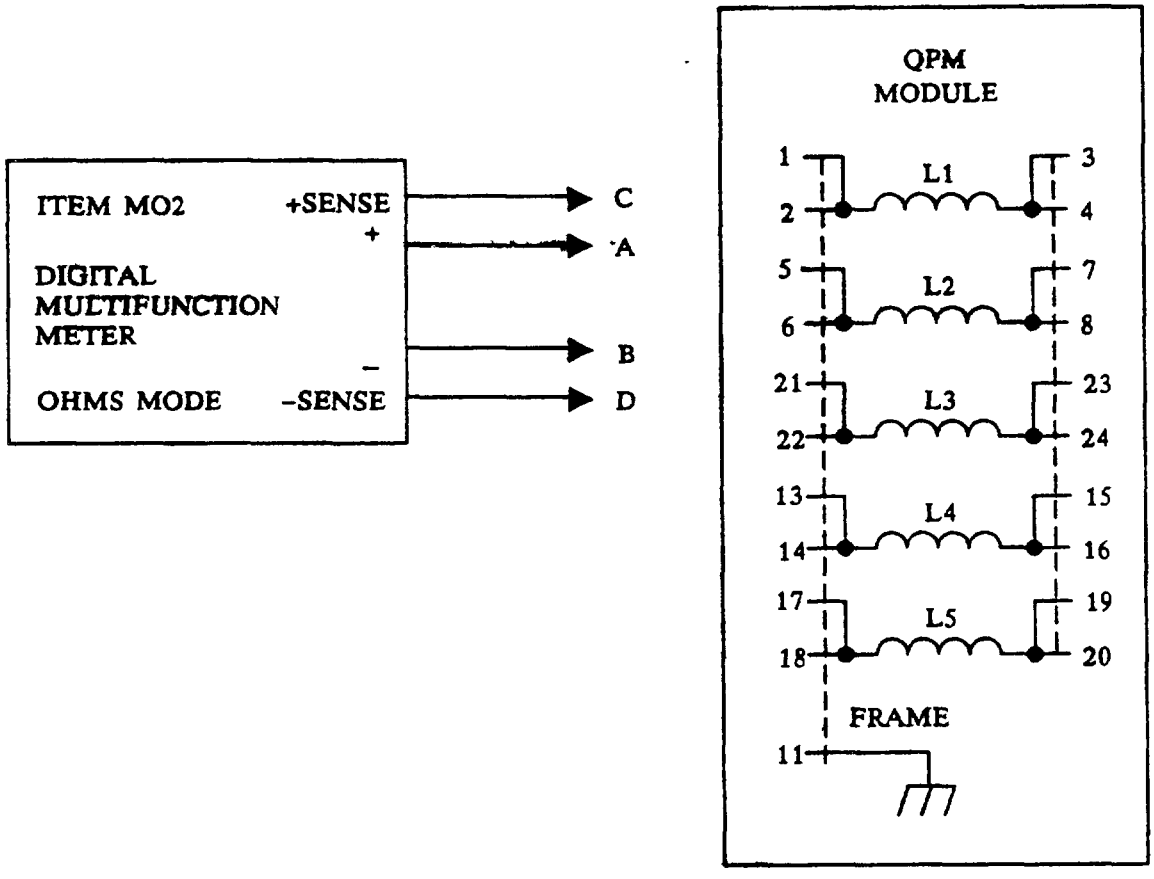

NOTES:
1. Each resistance value measured shall be per table I requirements after compensating for TARE in the setup.
2. For test conditions A1-A10, F, and H1-H10, item M02 shall be connected for two wire resistance measurements and points C and D shall not be used

FIGURE 3 Continuity, DC resistance, frame continuity, and jumper resistance test circuit for tables II, IV, VII, and IX

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:14Z
Check the source to verify that this is the current version before use.

TABLE IV. DC resistance tests.

Test condition	Parameter	Connect				Initial limits 25 ± 5°C, ambient		Unit	Test figure
		A to pin	B to pin	C to pin	D to pin	Min	Max		
C1	L1 dc resistance	2	3	1	4	60.3	73.7	mΩ	3
C2	L2 dc resistance	6	7	5	8	60 3	73.7	mΩ	3
C3	L3 dc resistance	22	23	21	24	60.3	73.7	mΩ	3
C4	L4 dc resistance	14	15	13	16	60.3	73 7	mΩ	3
C5	L5 dc resistance	18	19	17	20	60.3	73.7	mΩ	3

4

Source: https://assist.dla.mil -- Downloaded: 2026/10-20T16:14Z
Check the source to verify that this is the current version before use.