INCH-POUND

MIL-M-28787/143B(SH)
AMENDMENT 1
19 June 1991

MILITARY SPECIFICATION

MODULES, STANDARD ELECTRONIC

FLIP-FLOP, $J\overline{K}$, DIGITAL, KEY CODE GBB

This amendment forms a part of Military Specification MIL-M-28787/143B(EC), dated 19 January 1983, and is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 4

TABLE I, Test conditions D1-D14, Test type column. Delete "X" and substitute "S" (one place)

TABLE I, Test conditions E1-E24, Test type column. Delete "X" and substitute "S" (one place).

PAGE 7

4.4.2: Delete and substitute the following:

"4.4.2 Order of testing. Test conditions A through AA shall be performed in any order with the following exceptions. Test conditions A, B, C, D, and E are stress tests and shall be performed only at 25 ± 5°C. If test conditions A, B, C, D, or E are part of a sequence of tests, the order of testing shall be as follows A, B, C, D, and E where applicable, followed by the remaining tests in the sequence."

4.5.1: Delete the third sentence and substitute the following

"When electrical testing is called for at the end of each temperature stabilization period, test conditions F through L, M1-M14, N1-N14, P1-P14, Q1-Q14, R1-R8, S1-S6, T1-T6, U1-U8, V1-V14 and Z shall be performed in the order specified in 4.4.2 using the initial limits for applicable operating temperature."

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:16Z
Check the source to verify that this is the current version before use.

4 5 3 Delete and substitute the following.

"4 5.3 Life test. The life test shall be conducted in accordance with MIL-M-28787. The module shall be operated as shown on figure 2 Following the life test and while still at the maximum class temperature, electrical tests F through L, M1-M14, N1-N14, P1-P14, Q1-Q14, R1-R8, S1-S6, T1-T6, U1-U8, V1-V14 and Z shall be performed in the order specified in 4 4 2 using the operating temperature end-of-life requirements in table I Following the return of the module to 25 ± 5°C, electrical tests F through L, M1-M14, N1-N14, P1-P14, Q1-Q14, R1-R8, S1-S6, T1-T6, U1-U8, V1-V14 and Z shall be performed in the order specified in 4 4.2 using the 25 ± 5°C ambient end-of-life requirements in table I."

PAGE 86

FIGURE 28, GBB module block Delete and substitute new figure 28 as printed on page 3 of this amendment

PAGE 88


FIGURE 30, NOTE 3 Delete "120 Hz" and substitute "1 0 KHz ± 10%"

Preparing activity
Navy - SH

(Project 5963-N774)

Agent: NW

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:16Z
Check the source to verify that this is the current version before use.

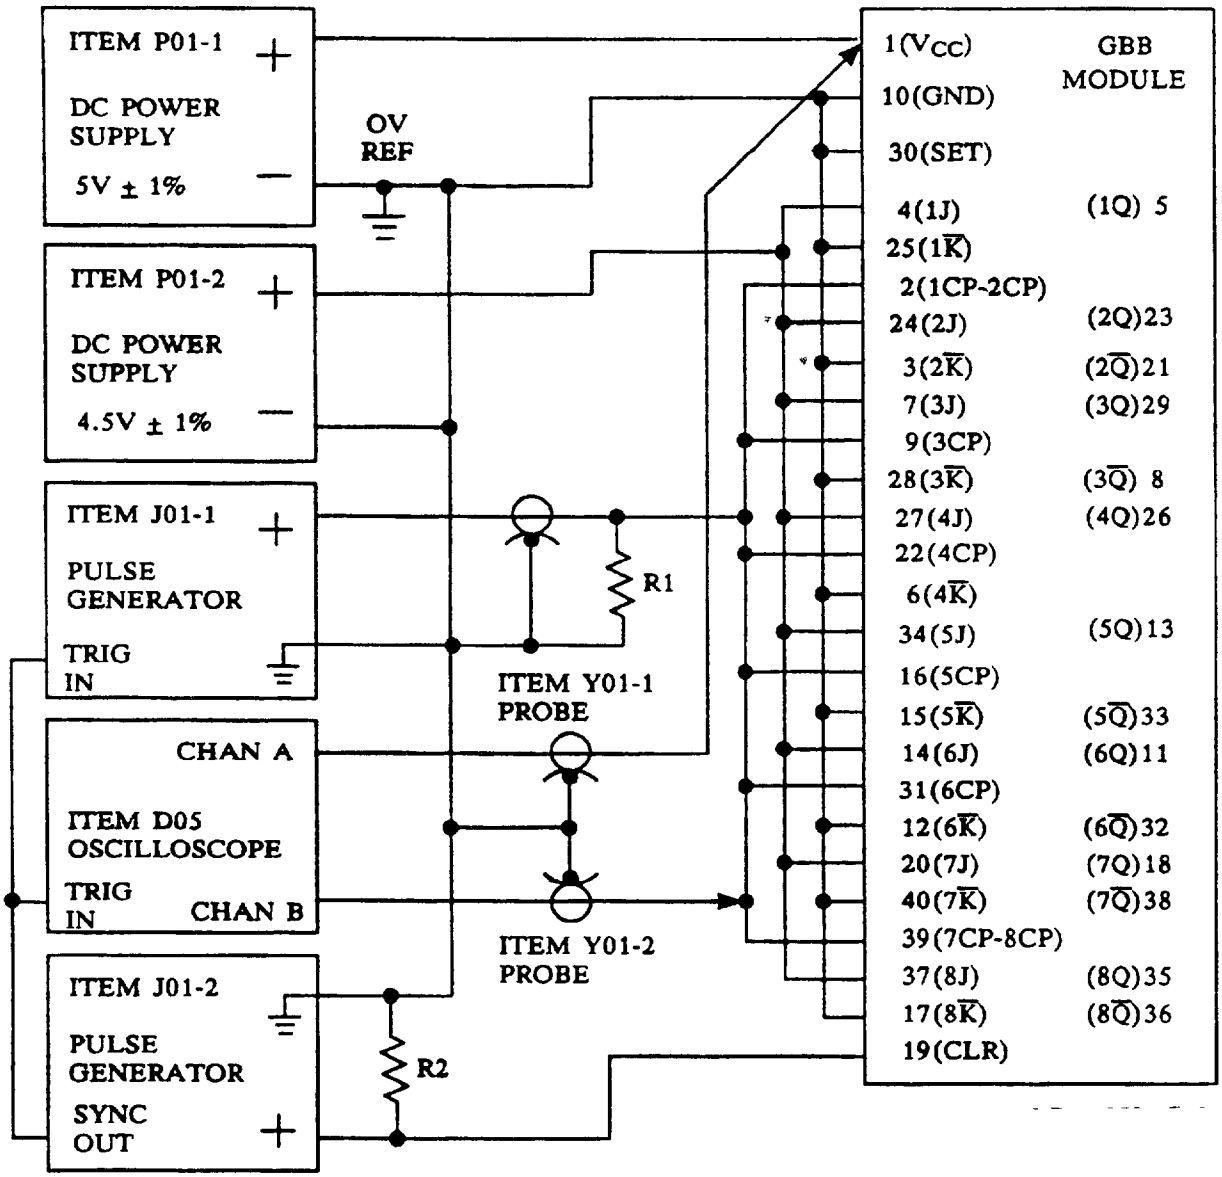

NOTE: R1 = R2 = 51.1Ω ± 1%, 1/4W

FIGURE 28. Power supply transient amplitude test circuit for table XVIII.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:16Z
Check the source to verify that this is the current version before use.