MIL-C-22443(Wep)
1 March 1961
SUPERSEDING
NAVORD OS 10079
1 October 1959

MILITARY SPECIFICATION

CONTAINERS, MODULAR, METAL GENERAL SPECIFICATION FOR

This specification has been approved by the Bureau of Naval Weapons, Department of the Navy.

1. SCOPE

1.1 This specification establishes the requirements of rigid, reusable metal combination storage and shipping containers designed as a system or standard series, hereinafter referred to as "modular container".

1.2 Classification. - Modular containers shall be of the following types, classes, styles as specified. (See 6.2)

TYPES	Type I	.063 Panel Thickness
	Type II	.090 Panel Thickness
CLASSES	Class 1	For contents weighing up to 250 pounds with no one dimension exceeding 60 inches.
	Class 2	For contents weighing from 250 pounds to 500 pounds with no one dimension exceeding 120 inches.
	Class 3	For contents weighing from 500 pounds to 1,000 pounds with no one dimension exceeding 300 inches.
	Class 4	For contents weighing from 1,000 pounds to 2,000 pounds with no one dimension exceeding 300 inches.
	Class 5	For contents weighing over 2,000 pounds
STYLES	Style A	End or side opening.
	Style B	Complex or special opening or openings.
	Style C	Top opening (shallow lid).
	Style D	Split (deep lid or equally divided halves, etc.).

FSC 8140

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:37Z
Check the source to verify that this is the current version before use.

Style E	Palletized (heavy base supporting and confining the contents, with the other five sides of the container serving as a protective cover).

2. APPLICABLE DOCUMENTS

2.1 The following specifications and standards of the issue in effect on date of invitation for bids, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

QQ-A-274	Aluminum Alloy Bar, Rods and Structural and Special Shaped Sections, Extruded, 6063 (63S)
QQ-Z-325	Zinc, Coating, Electrodeposited, Requirements for
QQ-A-327	Aluminum Alloy Plate and Sheet 6061
QQ-P-416	Plating, Cadium, (Electrodeposited)
TT-E-529	Enamel, Synthetic, Semi-Gloss

MILITARY

MIL-L-4343	Lubricating Grease, Pneumatic System
MIL-R-6855	Rubber, Synthetic, Sheet, Molded and Extruded, for Aircraft Applications.
MIL-W-6858	Welding, Aluminum, Magnesium, Non-harding Steels or Alloys, and Titanium, Spot, Seam and Stitch
MIL-E-7729	Enamel, Gloss, for Aircraft Use
MIL-W-8604	Welding of Aluminum Alloys, Process for
MIL-A-8623	Adhesive, Epoxy Resin, Metal to Metal Structural Bonding
MIL-A-9067	Adhesive Bonded Metal, Process and Inspection Requirements
MIL-E-15090	Enamel, Equipment, Light Gray (Formula No. 11)
MIL-A-15153	Aluminum Base Alloy Die Castings
MIL-C-15328	Coating, Pretreatment (Formula No. 117 for Metals)
MIL-S-21923(NOrd)	Synthetic Rubber Compound Butadiene-Styrene Type, Ozone Resistant, for Low Temperature Service
MIL-W-21927(NOrd)	Weapons; Handling and Preparations for Delivery of; General Requirements for
MIL-D-70327	Drawings, Engineering and Associated Lists

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:37Z
Check the source to verify that this is the current version before use.

STANDARDS

MILITARY

MIL-STD-105	Sampling Procedures and Tables for Inspection By Attributes
MIL-STD-129	Marking for Storage and Shipment
MIL-STD-130	Identification Marking of U. S. Military Property
MIL-STD-248	Qualification Tests for Welders
MS 33586	Metals, Definition of Dissimilar

FEDERAL

FED-STD-595	Colors

DRAWINGS

BUREAU OF NAVAL WEAPONS

2109428	Rail, Lid-Sealing Rail, Female .090 Modular Case
2109429	Rail, Split Case-Sealing Rail, Female .090 Modular Case
2109430	Rail, Split Case-Sealing Rail, Male .090 Modular Case
2109440	Rail, Lid-Sealing Rail, Female .063 Modular Case
2109441	Rail, Corner-.063 Modular Case
2109442	Rail, Split Case-Sealing Rail, Female .063 Modular Case
2109444	Rail, Split Case-Sealing Rail, Male .063 Modular Case
2118195	Corner, Split Case-Sealing Rail, Male .090 Modular Case
2118196	Corner, Lid-Sealing Rail, Female .090 Modular Case
2118197	Corner, Split Case-Sealing Rail, Female .090 Modular Case
2118198	Corner-Corner Rail .090 Modular Case
2118203	Rail, Split Case
2118204	Corner, Split Case, Sealing Rail .063 Modular Case
2118205	Corner, Corner Rail .063 Modular Case
2118207	Corner, Lid-Sealing Rail, Female .063 Modular Case
2154541	Rail, Corner- .090 Modular Case
2109896	Latch Assembly .063 Modular Case
2109435	Latch Assembly .090 Modular Case
1666067	Handle

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:37Z
Check the source to verify that this is the current version before use.

(Copies of specifications, standards and drawings required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Preproduction sample. - This specification requires submission of preproduction samples for preproduction testing. See section 4 for details.

3.2 Materials.

3.2.1 The material for each part shall be as specified herein. However, when a definite material is not specified, a material shall be used which will enable the containers to meet the performance requirements of this specification. Acceptance or approval of a constituent material shall not be construed as a guaranty of the acceptance of the finished product.

3.2.2 Standard parts. - Standard parts (MS, AN, JAN) shall be used whenever they are suitable for the purpose and shall be identified in accordance with MIL-D-70327. Commercial utility parts such as screws, nuts, bolts, cotter pins, etc., may be used, provided they possess suitable properties and are replaceable by the standard part (MS, AN, JAN) without alteration. Selection of applicable specifications and standards shall be in accordance with MIL-D-70327 and this specification.

3.2.3 Dissimilar metals. - Dissimilar metals, as defined in Standard MS 33586, shall not be used in contact with each other.

3.2.4 Panels. - Panels shall be sheet aluminum alloy 6061-T6 and 2024-T4 in accordance with Federal Specification QQ-A-327. Panels shall be of thickness as specified in 1.2 (Type I or II). Panels may be preformed, but distortion shall not be such as to preclude a final assembly meeting requirements of this specification.

3.2.5 Closure Members. - Closure members shall be aluminum alloy 6063-T6 extrusion, Federal Specification QQ-A-274, and complying with U. S. Navy BuWeps Drawings Number 2109444, 2109440, 2109442, 2109429, 2109430, and 2109428. (See Figure I for Illustrations.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:37Z
Check the source to verify that this is the current version before use.

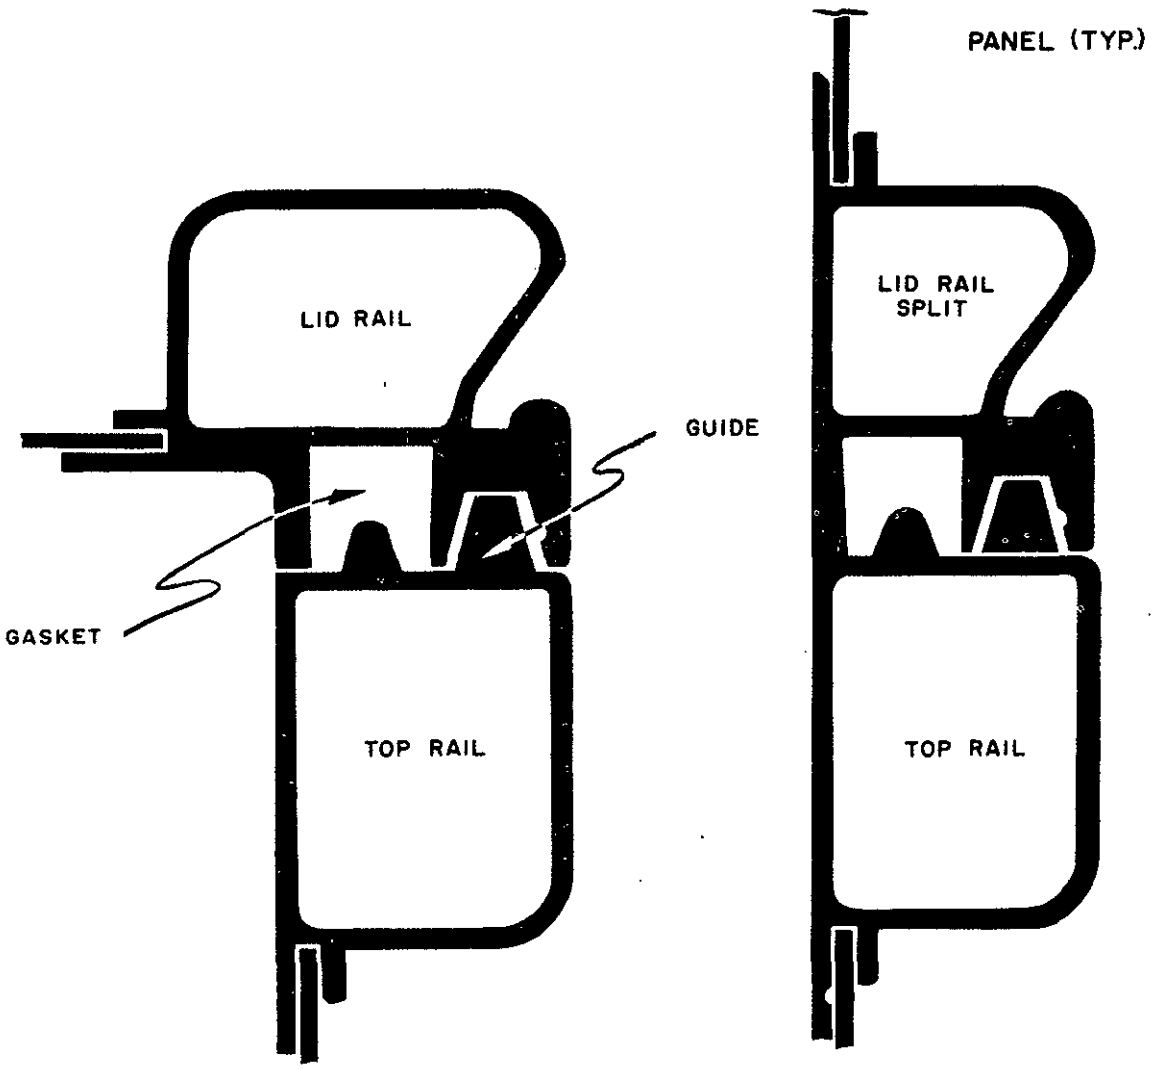


FIG. 1 TYPICAL CLOSURE MEMBERS

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:37Z
Check the source to verify that this is the current version before use.

3.2.6 Edge rails. - Edge rails shall be aluminum alloy 6063-T6, Federal Specification QQ-A-274, or aluminum alloy 6061-T6, Federal Specification QQ-A-270, complying with U. S. Navy BuWeps Drawings Number 2109441 and 2154541. (See Figure 2 for Illustrations).

3.2.7 Corners. - Corners shall be aluminum base alloy die casting, Federal Specification QQ-A-591, Alloy 2,A380, complying with U. S. Navy BuWeps Drawings Number 2118204, 2118207, 2118305 and 2118203 for Type I Containers. Drawing Number 2118195, 2118198, 2118197, and 2118196 for Type II Containers. (See Figure 3 for Illustrations.)

3.2.8 Adhesive. - Adhesive used for metal bonding shall comply with MIL-A-8623, Type III.

3.2.9 Sealing gaskets. - The Gasket shall be 3/8" x 3/8" with a concentric 3/16" diameter cavity. Gasket material shall be either MIL-R-6855, Class III, Grade 40 or 60, or MIL-S-21923 (NOrd) unless otherwise specified. All gasket joints shall be vulcanized to form a continuous gasket.

3.2.10 Stiffeners and supports, brackets, doublers. - Stiffeners, supports, brackets and doublers shall be aluminum alloy No. 6063 T6, Federal Specification QQ-A-274, or No. 6061-T6, Federal Specification QQ-A-327. Stiffeners, etc., shall not protrude beyond the plane established by corners.

3.2.11 Closure fastenings. (Latches). - Latches shall be in accordance with BuOrd Drawing 2109435 and BuOrd Drawing 2109896.

3.2.12 Handle provisions. - Handles shall be provided on all Class 1 Containers. Class 1 Containers weighing up to 150 pounds gross weight shall have one handle on each of the opposing ends of the container. Class 1 containers weighing over 150 pounds gross weight shall be provided with handles at locations for convenient lifting.

3.2.12.1 Handle design. - The handles shall be in accordance with BuOrd Drawing 1666067.

3.2.12.2 Handles, lifting rings, eyes lugs or tie downs for Class 2, 3, 4 and 5 containers shall be provided for in accordance with MIL-W-21927(NOrd); unless otherwise specified.

3.2.13 Lid. -- Lids, end or side openings and special openings weighing over 75 pounds shall be provided with grips for convenient handling.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:37Z
Check the source to verify that this is the current version before use.



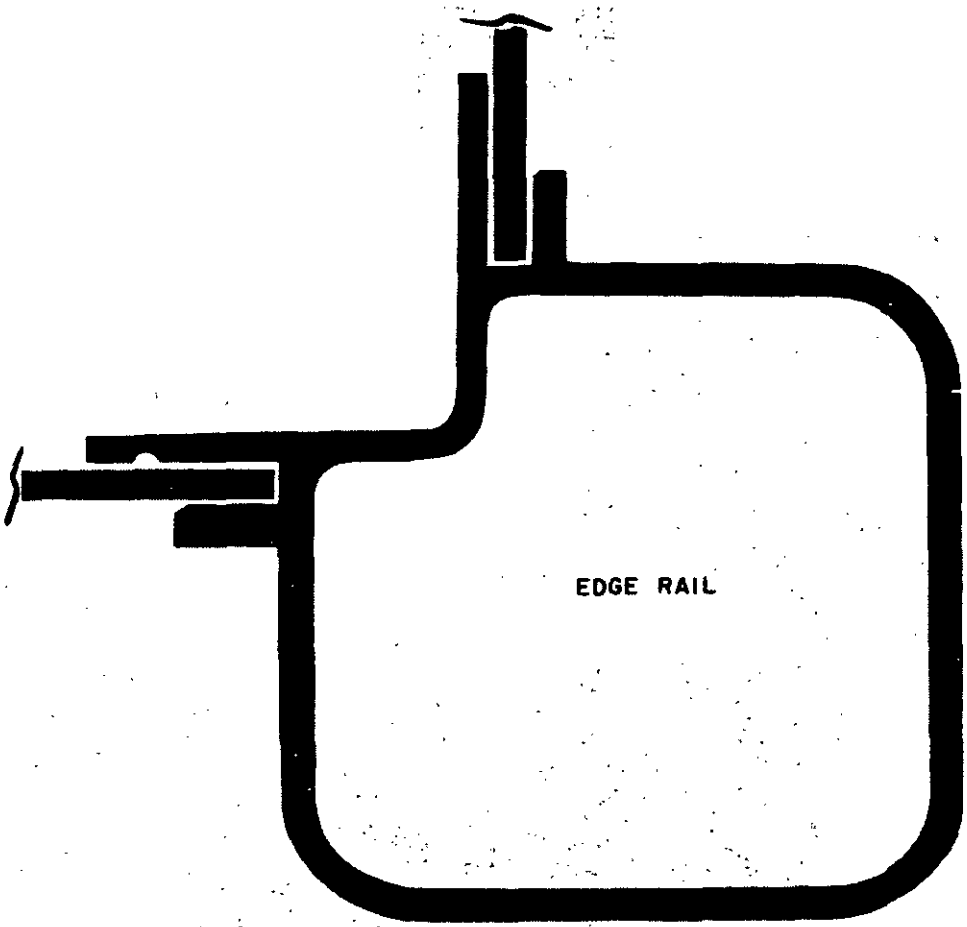


FIG. 2 TYPICAL EDGE RAIL


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:37Z
Check the source to verify that this is the current version before use.

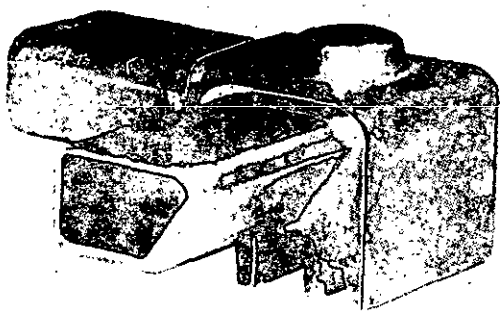


CORNER, LID RAIL

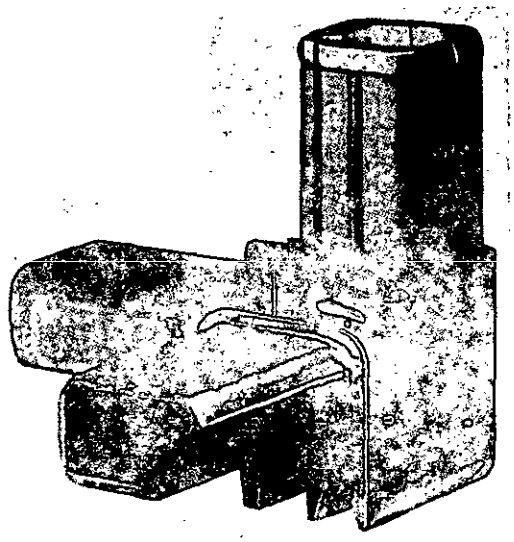

CORNER, LID RAIL SPLIT

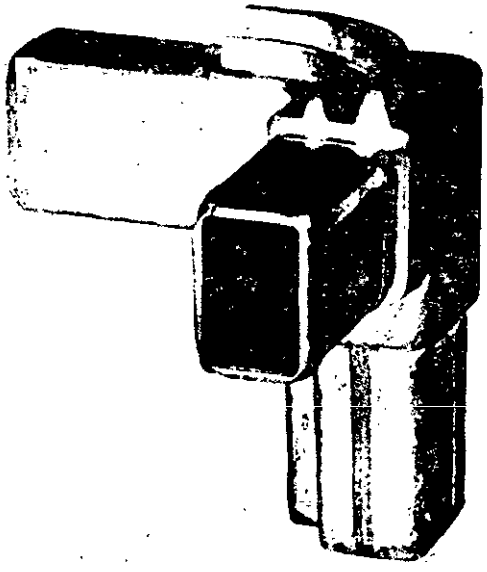


CORNER, TOP RAIL

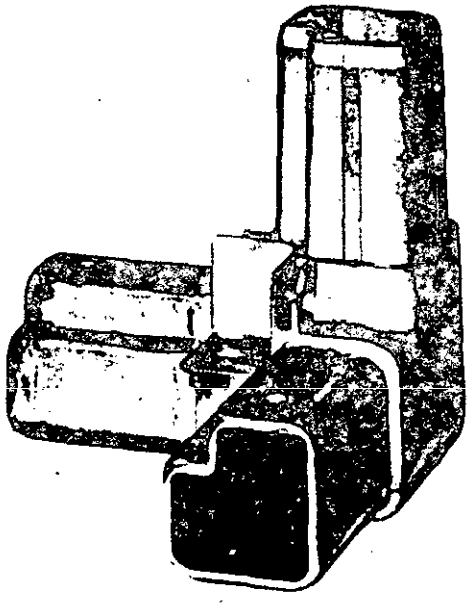

CORNER, CORNER RAIL

FIG.3 TYPICAL CORNERS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:37Z
Check the source to verify that this is the current version before use.

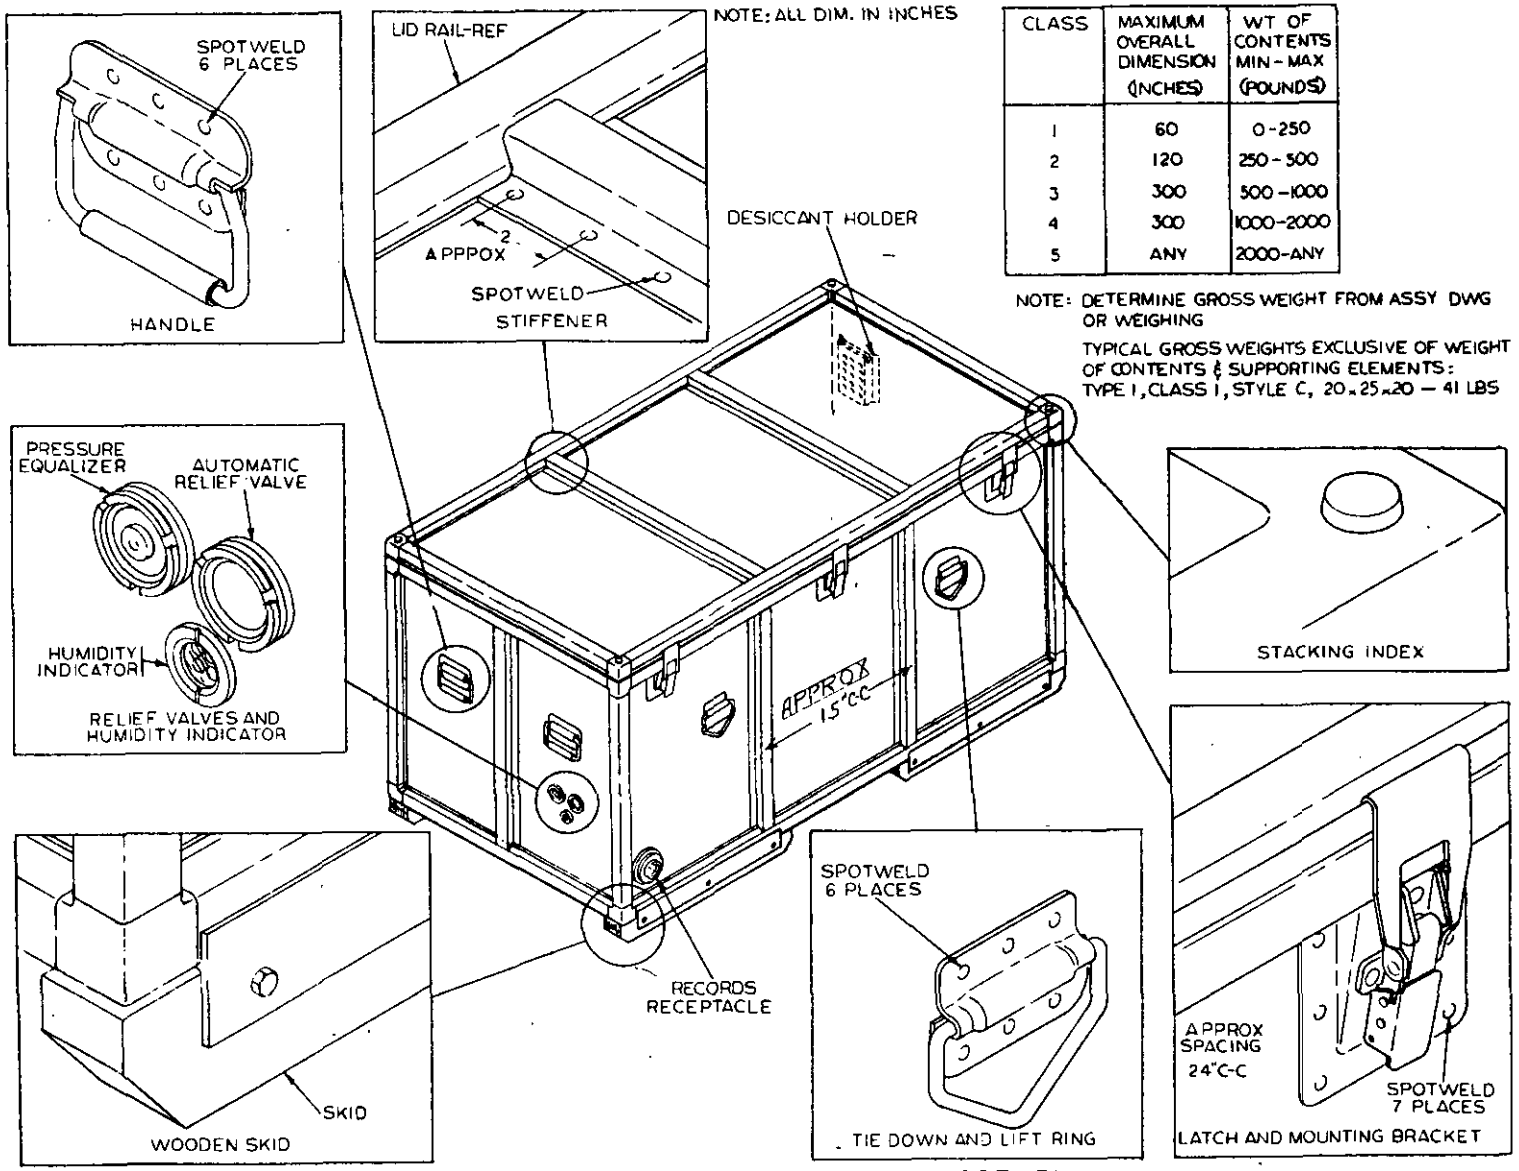

CLASS	MAXIMUM OVERALL DIMENSION (INCHES)	WT OF CONTENTS MIN - MAX (POUNDS)
1	60	0-250
2	120	250-500
3	300	500-1000
4	300	1000-2000
5	ANY	2000-ANY

NOTE: DETERMINE GROSS WEIGHT FROM ASSY DWG OR WEIGHING

TYPICAL GROSS WEIGHTS EXCLUSIVE OF WEIGHT OF CONTENTS & SUPPORTING ELEMENTS:
TYPE I, CLASS I, STYLE C, 20 x 25 x 20 — 41 LBS

TYPE I (.063) METAL MODULAR CONTAINER—TYPICAL ASSEMBLY

FIG. 4

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:37Z
Check the source to verify that this is the current version before use.

3.2.14 Hardware. - Ferrous alloy hardware other than corrosion resistant steels shall be cadmium plated in accordance with specification QQ-P-416, Class I, Type II, or zinc plated in accordance with QQ-Z-325, Class 2, Type II.

3.3 Design and construction. - The design of a modular container consists of a skeletal structural frame with inset skin panels capable for use as a combination storage and shipping container for weights up to and exceeding 2,000 pounds.

3.3.1 Design pressure. - Unless otherwise specified the container and its components shall be designed to withstand both an external and internal pressure of 1.5 psig without permanent deformation.

3.3.2 Preparation of surfaces. - Surfaces to be bonded or welded shall be cleaned (e. g., in a hot alkaline soap solution), etched, rinsed and dried. Chemically deposited coatings are to be avoided prior to bonding.

3.3.3 Bonding. - Bonding procedures shall be in accordance with MIL-A-9067.


3.3.4 Fusion welding. - Fusion welding of aluminum alloys shall be in accordance with MIL-W-8604 and shall be performed by operators who are currently certified in accordance with MIL-STD-248. Welds shall be reasonably smooth and free of craters. They shall exhibit characteristics of fusion, penetration, and soundness of weld deposit representative of good welding practice. They shall be free of irregularities which indicate lack of skill on the part of the operator.

3.3.5 Spot welding. - Spot welds shall be high commerical standard with shear strength and metallurgy equivalent to that defined in MIL-W-6858, Class B, except that welds for primary structural loads shall be Class A.

3.3.6 Stacking provisions. -Unless otherwise specified the top and bottom of the container shall be provided with load-bearing structures and indexing devices to permit stacking loaded containers, one upon another, in a stack five containers high (for depot storage). Container stacking shall be capable of accomplishment by mechanical means, normally overhead lift or by fork-lift truck.

3.3.7 Feet. - When specified, Class 2, containers shall be so designed that they may be lifted by forklift trucks from side and/or ends without employing any additional blocking and without permanent deformation to the container.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:37Z
Check the source to verify that this is the current version before use.

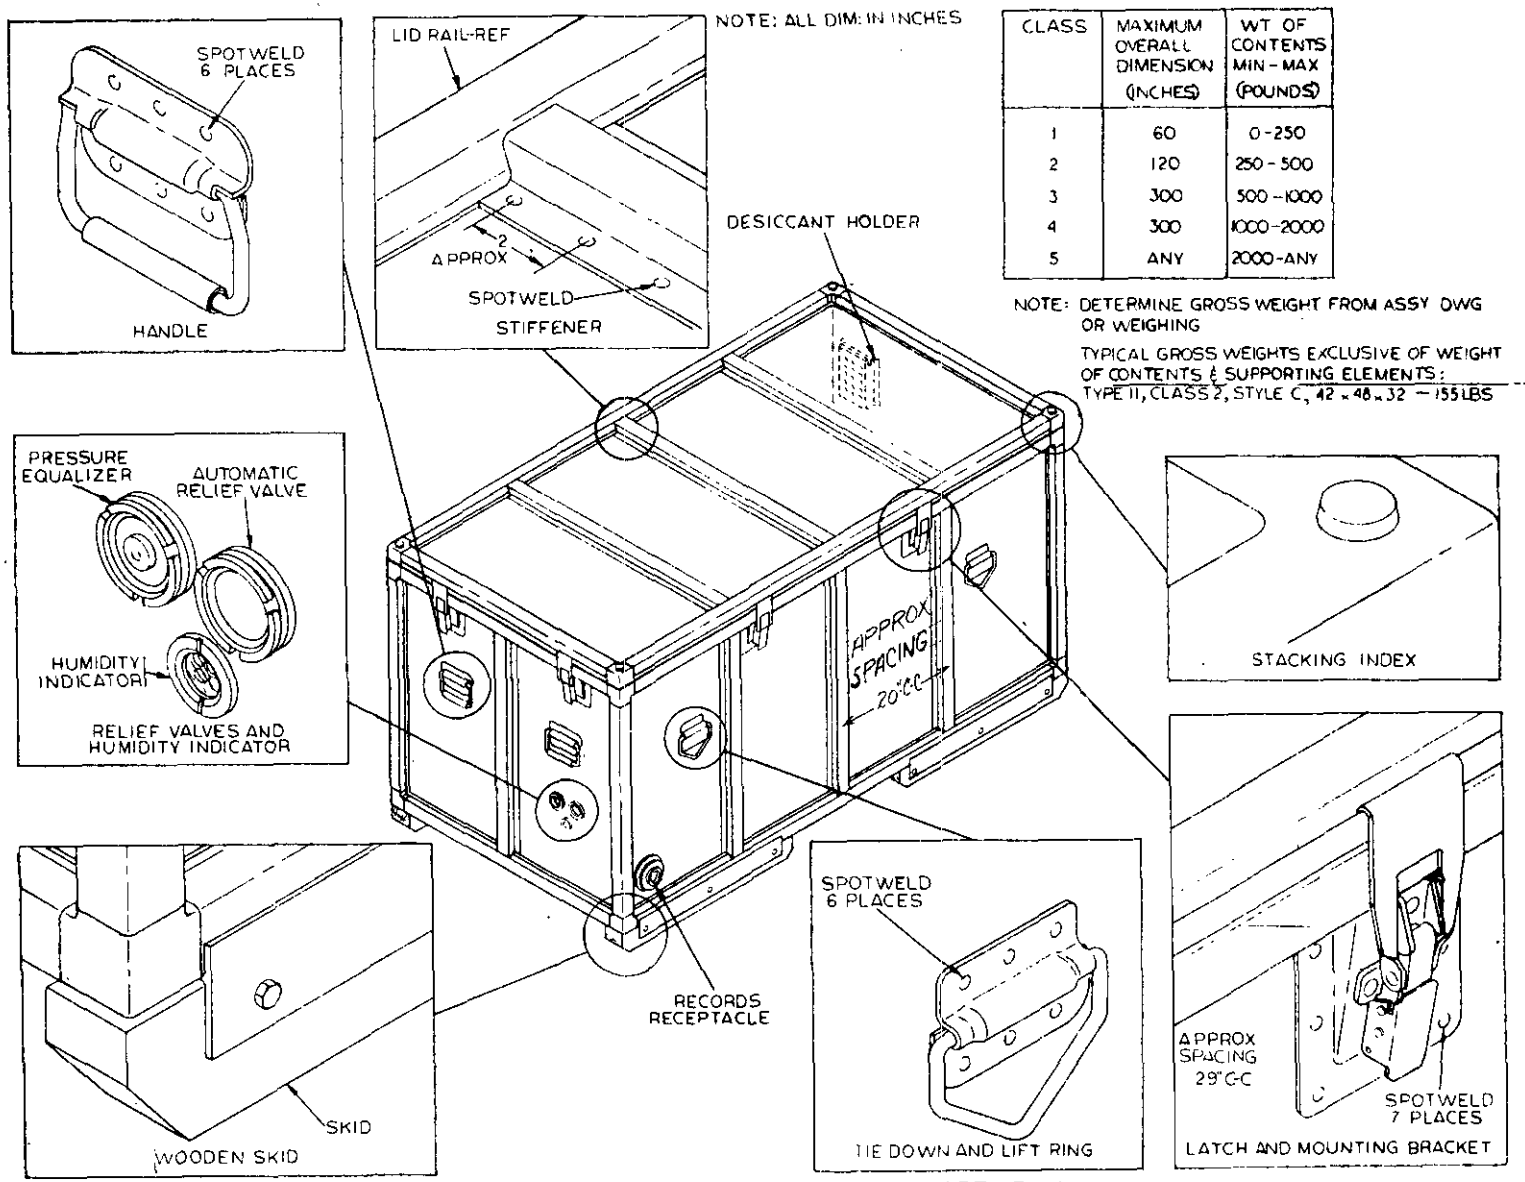

CLASS	MAXIMUM OVERALL DIMENSION (INCHES)	WT OF CONTENTS MIN - MAX (POUNDS)
1	60	0-250
2	120	250 - 500
3	300	500 - 1000
4	300	1000-2000
5	ANY	2000-ANY

NOTE: DETERMINE GROSS WEIGHT FROM ASSY DWG OR WEIGHING

TYPICAL GROSS WEIGHTS EXCLUSIVE OF WEIGHT OF CONTENTS & SUPPORTING ELEMENTS:
TYPE II, CLASS 2, STYLE C, 42 x 48 x 32 — 155 LBS

TYPE II (.090) METAL MODULAR CONTAINER--TYPICAL ASSEMBLY

FIG. 5

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:37Z
Check the source to verify that this is the current version before use.

3.3.8 Skids. - Unless otherwise specified, Class 3, 4 and 5 containers, shall incorporate load-distributing members or skids on the underside. Deflection pads or other resilient devices may be used between the skids and the container shell to protect the container during impacts. Openings for inserting the forks of the fork lift truck shall be provided. (See 6.2)

3.3.9 Vent plug. - When Specified, captive vent plug shall be provided as specified in Mil-W-21927. (See 6.2)

3.3.10 Valves and pressure equalizers. - Automatic relief valve shall be provided to relieve internal or external pressure in excess of 1.5 psi. Flow rate shall be established by container manufacturer based on rate of altitude ascent or descent of 1000 feet per minute. A simple manually operated valve shall be provided to equalize the air pressure inside the case to that of the outside air, either alone or in combination with the automatic relief valve.

3.3.11 Humidity indicator. - When specified, humidity indicators shall be provided as specified in MIL-W-21927. (See 6.2)

3.3.12 Security seals. - Provision shall be made for wire or strap type security seal. (See 6.2)

3.3.13 Desiccant holder. - When specified, the container shall be equipped with interior receptacle for desiccant as indicated in MIL-W-21927(NOrd).)See 6.2)

3.3.14 Records receptacle. - When specified, the container shall be equipped with an internal records receptacle as listed in MIL-W-21927(NOrd). (See 6.2)

3.3.15 Compartment for shipping papers. - When specified a spray tight external compartment with external access door shall be provided in the end of all containers (either in the lid or in the lower portion) for storage of shipping papers. (See 6.2)

3.3.16 Finish. - Surfaces shall be cleaned by steam or wiping with methyl ethyl ketone and then primed with a pretreatment coating in accordance with MIL-C-15328. Surfaces shall then be primed with one coat of Zinc Chromate Primer, MIL-P-8585. Surfaces shall then be painted with one coat of Enamel, in accordance with MIL-E-15090, Type II and III, Class 2, MIL-E-7729, Type III or TT-E-529, Class B.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:37Z
Check the source to verify that this is the current version before use.

3.3.17 Color. - Unless otherwise specified containers for the U. S. Air Force shall be painted to match color between Color Number 15044 and Color Number 15080 of Federal Standard 595.

3.3.17.1 Unless otherwise specified containers for the U. S. Army shall be painted to match Color Number 34087 of Federal Standard 595.

3.3.17.2 Unless otherwise specified containers for the U. S. Navy shall be painted to match Color Number 26173 of Federal Standard 595.

3.3.18 Dimensions. - Dimensions of containers covered by this specification shall be given in terms of inside measurement from panel to panel. Tolerance on these dimensions shall be ± 1/16 inch. (See 6.2)

3.3.19 Shock and Vibration Isolation. - When specified, the container shall include a system designed to isolate shock and vibration. The design criteria shall be specified by the design office. (See 6.2)

3.4 Performance and environmental requirements.

3.4.1 Rough handling. - The container and its component parts shall be subjected to the rough handling tests as specified in 4.5.2 after which the container shall not leak or to spill contents, and all seals, barriers, gaskets, etc. shall remain sealed and the packaged and packed item shall not have sustained such damage as to preclude it from passing all requirements of the item specification.

3.4.2 Vibration. - The container shall be subjected to the vibration test as specified in 4.5.3 after which there shall be no damge to the container or its component parts which would impair its intended function.

3.4.3 Airtightness. - Unless otherwise specified, the container shall not leak when tested in accordance with 4.5.4. Evidence of leaking by steady formation of bubbles (under design pressure) shall be cause for rejection.

3.4.4 Serviceability. - The container shall be subjected to the serviceability tests as specified in 4.5.5, after which, deformation of the container which prevents removal of contents and difficulty of inserting or removing forks, shall be cause for rejection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:37Z
Check the source to verify that this is the current version before use.

3.4.5 Environmental requirements. - The container shall be subjected to the environmental tests as specified in 4.5.6, after which, the container shall show no evidence of corrosion, deterioration, rupture or collapse of container or seal, or malfunction of parts, valves, or suspension system.

3.5 Nameplates or products markings. - The container and component parts shall be marked in accordance with MIL-STD-130.

3.6 Workmanship. - The container shall be well made and free from any defects which may affect durability, strength and serviceability.

4. QUALITY ASSURANCE PROVISIONS

4.1 Contractors inspection. - Unless otherwise specified herein the supplier is responsible for the performance of all inspection requirements prior to submission for Government inspection and acceptance. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. Inspection records of the examinations and tests shall be kept complete and available to the Government as specified in the contract or order. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of Inspection. - The examination and testing of containers shall be classified as follows:

a. Pre-production sample (See 4.3)
b. Acceptance Tests (See 4.4)

4.3 Pre-production Sample. - Unless otherwise specified, a representative sample of one container of each size shall be manufactured by the methods and procedures proposed for the production lot. The Government Inspector shall perform, witness, or participate in tests specified in 4.5. When testing the container shall be completely loaded with the actual item to be packaged or simulated contents may be used, if in accordance with MIL-W-21927. Upon conditional acceptance by the Inspector, the pre-production sample shall be forwarded, together with a report of inspection, to an activity designated in the contract or

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:37Z
Check the source to verify that this is the current version before use.

by the procuring agency, for the purpose of determining compliance with all requirements of the contract, this document, and the drawings. Further production of the container by the contractor prior to approval of the contracting activity or of the completion of the tests on pre-production samples shall be at the contractor's rish. Pre-production samples accepted will be applied as part of the quantity specified by the contract or order.

4.3.1 Rejection and Re-test. - Failure of any container to conform to any of the requirements shall be cause for rejection of the container. Containers which have been rejected may be re-worked or replaced to correct the defects and re-submitted for acceptance.

4.4 Acceptance inspection.

4.4.1 Inspection lot. - An inspection lot shall consist of all containers, together with applicable components, produced under the same production processes and offered for inspection at one time.

4.4.2 Rejection and retest. - If an inspection lot is rejected, the manufacturer may rework the lot, or screen out defectives and re-submit it for acceptance inspection. Re-submitted lots shall be kept separate from new lots. The re-submitted lot shall be inspected using tightened inspection.

4.4.3 Sampling. - The sampling procedure shall be in accordance with MIL-STD-105.

4.4.4 Acceptance inspection. - Containers submitted for Government acceptance shall meet all the requirements of this specification. Acceptance inspection shall consist of the following examination and tests:

a. Visual and mechanical examination (see 4.5.1). For this examination use sampling plan Inspection Level II, Acceptable Quality Level (AQL) of 0.65 percent defective in accordance with MIL-STD-105. If the rejection number includes dimensional defects, reject the lot. If the rejection number is for visual defects only, then perform the tests outlined in (c) below for further quality assurance.

b. Leak test (see 4.5.4). For this test use 100 percent inspection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:37Z
Check the source to verify that this is the current version before use.

c. Other tests (performance and environmental-see 4.5.2 through 4.5.7). For these tests use the following sampling and testing procedure. Failing sample units from the failing lots of 4.4.4a (on basis of visual examination) shall be tested in accordance with 4.5.2 through 4.5.7. If all the failing sample units of 4.4.4a successfully pass the tests of 4.5.2 through 4.5.7 the lot represented will be accepted. Failure of any sample unit to pass these tests will be cause for rejection of the lot. Rejected lots shall be screened by the supplier prior to resubmission for acceptance. Resubmitted lots and the two succeeding lots following a rejected lot shall be subjected to the performance and environmental tests of 4.5.2 through 4.5.7 after successfully passing the visual and mechanical examination of 4.4.4a by the following procedure. From the sample lot selected for the examinations of 4.4.4a select a random sample of accepted sample units in accordance with MIL-STD-105, Inspection Level L-4 and subject these sample units to the tests of 4.5.2 through 4.5.7. If one or more defects are found the lot represented shall be rejected.

4.5 Test procedures.

4.5.1 Visual and mechanical examination. - Containers shall be examined to verify that the material, design, construction, physical dimensions, marking and workmanship are in accordance with the applicable requirements. See 3.2, 3.3, 3.3.18, 3.5, and 3.6)

4.5.2 Rough handling tests. - To determine conformance with 3.4.1, the container shall be tested in accordance with the Test Selection Chart for Rough Handling specified in MIL-W-21927 (NOrd).

4.5.3 Vibration test. - To determine conformance with 3.4.2 the container shall be tested in accordance with Test Selection Chart for Vibration specified in MIL-W-21927 (NOrd).

4.5.4 Airtightness test. - To determine conformance with 3.4.3, each container shall be tested in accordance with leak test for pressurized container specified in MIL-W-21927 (NOrd) except maximum pressure shall not exceed 1½ psig.

4.5.5 Serviceability tests. - To determine conformance with 3.4.4 the container shall be tested in accordance with the serviceability tests specified in MIL-W-21927 (NOrd).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:37Z
Check the source to verify that this is the current version before use.

4.5.6 Environmental test. - To determine conformance with 3.4.5 the container shall be tested in accordance with the applicable tests specified in MIL-W-21927 (NOrd).

5. PREPARATION FOR DELIVERY

5.1 Packing. - Unless otherwise specified in the contract or order, packing for domestic shipment shall be in accordance with approved commercial packing methods, adequate to protect container from injury and to assure delivery at destination. The method used shall be commensurate with shipping at the lowest practical commercial rate.

5.2 Labeling and marking. - Unless otherwise specified, labeling and marking of all shipments shall be in accordance with MIL-STD-129. Any special marking required by the contract or order shall be provided.

6. NOTES

6.1 Intended use. - The modular container described in this specification is intended to accommodate sizeable electronic components, instruments, missiles, guidance and test equipment, complex weapons and other items. The modular container is designed to provide containers of the smallest cubage and the lightest weight consistent with durability, component protection and practicability. It is especially adapted to accommodate more than one model or type weapon or weapon component and may be converted to all-purpose use.

6.2 Ordering data. - Procurement documents should specify the following:

a. Title, number and date of this specification

b. Size of container (See 3.3.18)

c. Type, Class and Style of Container (See 1.2)

d. Humidity Indicator (See 3.3.11)

e. Color (See 3.3.17)

f. Desiccant Holder (See 3.3.13)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:37Z
Check the source to verify that this is the current version before use.

g. Records Receptacle (See 3.3.14)

h. Compartment for Shipping Papers (See 3.3.15)

i. Vent Plug (See 3.3.9)

j. Fork Lifting (See 3.3.8)

k. Shock and vibration isolation (See 3.3.19)

l. Type of security seal (wire or strap)

6.3 With respect to products requiring qualification, awards will be made only for such products as have, prior to the time set for opening of bids been tested and approved for inclusion in the applicable Qualified Products List whether or not such products have actually been so listed by that date. The attention of the suppliers is called to this requirement, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government, tested for qualification, in order that they may be eligible to be awarded contracts or orders for the products covered by this specification. The activity responsible for the Qualified Products List is the Bureau of Naval Weapons and information pertaining to qualification of products may be obtained from that activity.

6.4 The provision for Marking in 5.2 will be required only for direct purchase by, or direct shipment to, the Government.

Notice. - When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:37Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity *(as indicated on reverse hereof)*.

SPECIFICATION

ORGANIZATION *(Of submitter)* | CITY AND STATE

CONTRACT NO. | QUANTITY OF ITEMS PROCURED | DOLLAR AMOUNT $

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES.

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)* | DATE

DD FORM 1 APR 63 1426 REPLACES NAVSHIPS FORM 4863, WHICH IS OBSOLETE PLATE NO. 15419

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:37Z
Check the source to verify that this is the current version before use.