INCH-POUND

MIL-C-22442/37A
12 January 1990
SUPERSEDING
MIL-C-22442/37
2 September 1988

MILITARY SPECIFICATION SHEET

CABLE ASSEMBLY, RADIO FREQUENCY (AIRCRAFT AUDIO) CX-4708A/AIC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the cable described herein shall consist of this document and the latest issue of specification MIL-C-22442.

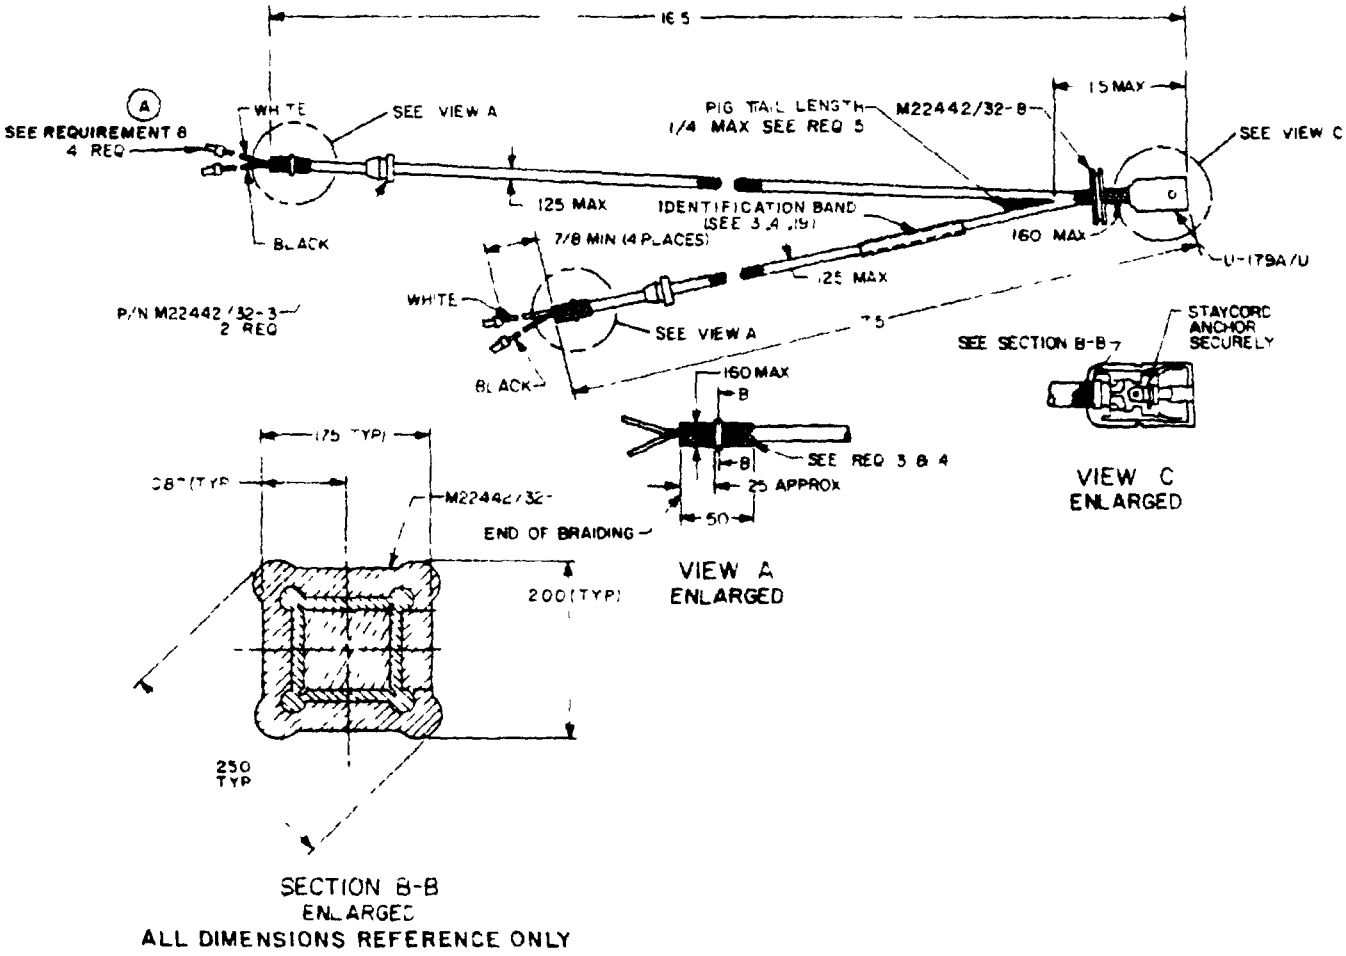


FIGURE 1. Cable assembly CX-4708A/AIC P/N M22442/37-4708 and M22442/37-1. A

AMSC N/A
FSC 5995
DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:34Z
Check the source to verify that this is the current version before use.

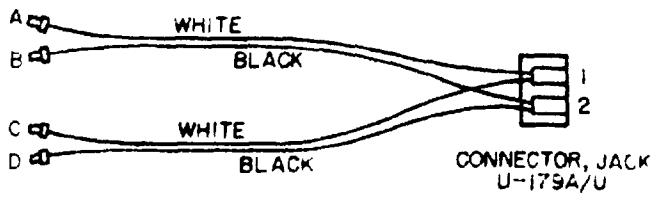


FIGURE 2. Cable assembly CX-4708A/AIC schematic diagram. P/N M22442/37-4708 and M22442/37-1. (A)

REQUIREMENTS:

1. The cable (cord) shall be in accordance with M22442/35-3 except that there shall be two black and two white conductors as shown in Figure 2.

2. The weight of the cable assembly shall not be greater than 3 ounces.

3. The crimp ring shall be crimped securely over the staycord. The excess staycord shall be trimmed. The crimp ring shall withstand 8 pounds of pull in the direction of the axis of the cord.

4. The build-up shall be made of successive layers of braid and shall not be tapered toward the conductor break-out. The braid shall be kept tight. There shall be no exposed ends. No tape shall be used under the braid.

5. Branched end braiding shall terminate in a pigtail. The braided cover of the branches shall be secured within the main bundle. Braiding at the "Y" junction shall have no additional build-up or exposed ends.

6. The DC resistance shall be less than 2 ohms between the following contacts.

   (a) Contact A and contact 1 of U-179A/U.

   (b) Contact B and contact 2 of U-179A/U.

   (c) Contact C and contact 1 of U-179A/U.

   (d) Contact D and contact 2 of U-179A/U.

7. The cable assembly shall be tested in accordance with the tests listed in Table I.

(A) 8. The M22442/37-4708 cable assembly shall be terminated with M22442/32-2 connectors. The M22442/37-1 cable assembly shall be terminated with M22442/32-12 connectors

Source: https://assist.dla.mil -- Downloaded: 20260-19T12:34Z
Check the source to verify that this is the current version before use.

NOTES:

1. All dimensions are in inches.
2. Tolerances are metal parts ±.005, molded sections ±.05 inches unless otherwise specified.
3. This specification for CX-4708A/AIC, P/N M22442/37-4708 supersedes Air Force Drawing 60C12605.
4. The identification band for the military part number line may read M22442/37-4708 or M22442/37-1, as appropriate.

Custodians:
Air Force - 85
Army - CR

Review Activities:
Air Force - 11
Air Force - 99
DLA - ES

Preparing Activity.
Navy - AS
Project No. 5995-0115-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:34Z
Check the source to verify that this is the current version before use.

TABLE I.

Inspection	Requirement Paragraph	Test Paragraph	Group I Qualification Tests	Group II Quality Conformance Test 100%	Group III Sample Testing Per 4.5.1
GROUP A (ALL SAMPLE UNITS) 1/					
Visual & Mechanical Inspection	3.1 & 3.4	4.6.2	X	X	
Soldering	3.4.24	4.6.2.1	X	X	
Continuity	3.5.3	4.6.5	X	X	
GROUP B					
Dielectric Withstanding Voltage	3.5.5	4.6.7	X		X
Pull Test 1/	3.5.7	4.6.9	X		X
GROUP C					
Durability 1/	3.5.13	4.6.15	X		X
GROUP D 1/					
Temperature-Altitude 2/	3.6.1	4.7	X		
Salt Fog	3.6.2	4.7	X		
Shock	3.6.6	4.7	X		
Humidity	3.6.6	4.7	X		
Thermal Shock	3.6.6	4.7	X		

1/ Minimum tests for QPL retention (see paragraph 4.4.4).
2/ Steps 3 and 12 only.

Source: https://assist.dla.mil -- Downloaded: 202640-19T12:34Z
Check the source to verify that this is the currenversion before use.