MILITARY SPECIFICATION SHEET

CABLE ASSEMBLY, RADIO FREQUENCY (AIRCRAFT AUDIO)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the cable described herein shall consist of this document and the latest issue of specification MIL-C-22442.

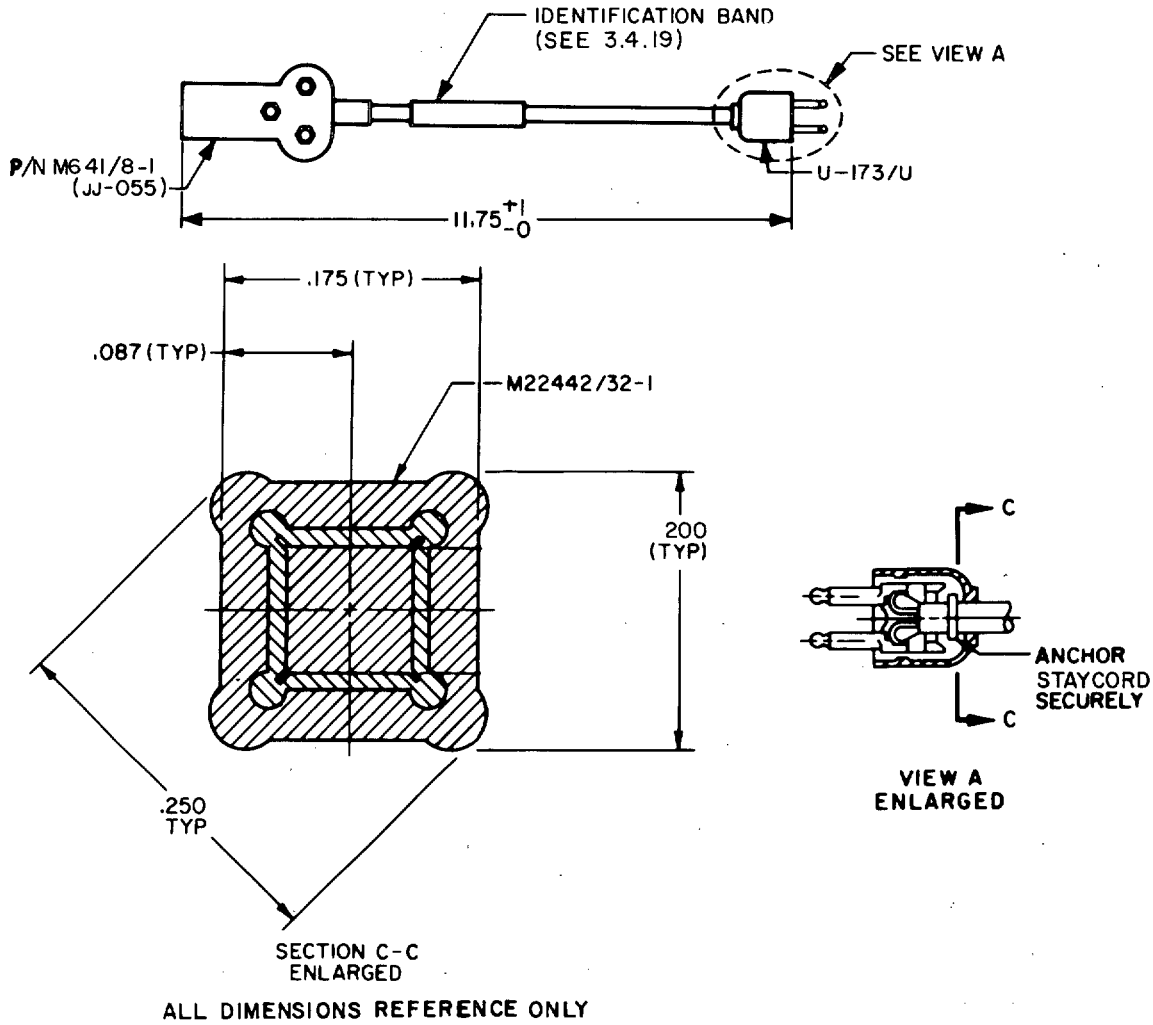


FIGURE 1. Cable assembly P/N M22442/38-1.

AMSC N/A FSC 5995

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:34Z
Check the source to verify that this is the current version before use.

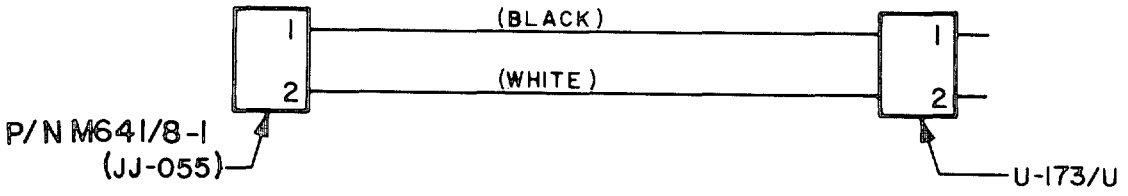


FIGURE 2. Cable assembly schematic diagram.

APPLICABLE DOCUMENTS:

MIL-C-55668	Cord, Electrical, Audio Subminiature (Retractile and Straight)
MIL-C-10392	Cord, Electrical (Audio, Miniature)
MIL-J-641/8	Jacks, Telephone, General Specification for

APPLICABLE DRAWINGS

AIR FORCE

57B12662	Connector, Plug Electrical U-173/U
57B12664	Tip - Electrical, Plug Connector

REQUIREMENTS:

1. The cable (cord) shall be in accordance with MIL-C-10392 Type WD-27 or MIL-C-55668 Type III 2 conductor.

2. The staycord shall be firmly attached to the connectors.

(A) 3. The DC resistance shall be less than 2 ohms between the following contacts:

   (a) Contact 1 of P/N M641/8-1 (JJ-055) and contact 1 of U-173/U.

   (b) Contact 2 of P/N M641/8-1 (JJ-055) and contact 2 of U-173/U.

4. The cable assembly shall be tested in accordance with the tests listed in Table I.

(A) 5. The weight of the cable assembly shall not be greater than 2 ounces.

6. The U-173/U connector shall be made in accordance with Air Force drawings 57B12662 and 57B12664.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:34Z
Check the source to verify that this is the current version before use.

NOTES:

1. All dimensions are in inches.
2. Tolerances are metal parts ±.005, molded sections ±.05 inches unless otherwise specified.

Custodians:
Air Force - 85
Army - CR

Review Activities:
Air Force - 11
Air Force - 99
DLA - ES

Preparing Activity:
Navy - AS
Project No. 5995-0120-19

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:34Z
Check the source to verify that this is the current version before use.

TABLE I.

Inspection	Requirement Paragraph	Test Paragraph	Group I Qualification Tests	Group II Quality Conformance Test 100%	Group III Sample Testing Per 4.5.1
GROUP A (ALL SAMPLE UNITS) 1/					
Visual & Mechanical Inspection	3.1 & 3.4	4.6.2	X	X	
Soldering	3.4.24	4.6.2.1	X	X	
Continuity	3.5.3	4.6.5	X	X	
GROUP B					
Dielectric Withstanding Voltage	3.5.5	4.6.7	X		X
Pull Test 1/	3.5.7	4.6.9	X		X
GROUP C					
Durability 1/	3.5.13	4.6.15	X		X
Ozone Resistance 1/	3.5.14	4.6.16	X		X
Jacket Elongation	3.5.15	4.6.17	X		X
GROUP D 1/					
Temperature-Altitude 2/	3.6.1	4.7	X		
Salt Fog	3.6.2	4.7	X		
Shock	3.6.6	4.7	X		
Humidity	3.6.6	4.7	X		
Thermal Shock	3.6.6	4.7	X		

1/ Minimum tests for QPL retention (see paragraph 4.4.4).
2/ Steps 3 and 12 only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:34Z
Check the source to verify that this is the current version before use.