MILITARY SPECIFICATION SHEET

CABLE ASSEMBLY, RADIO FREQUENCY (AIRCRAFT AUDIO) EA-3B ADAPTER CABLE

This specification sheet is approved for use by the Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the cable described herein shall consist of this document and the latest issue of specification MIL-C-22442.

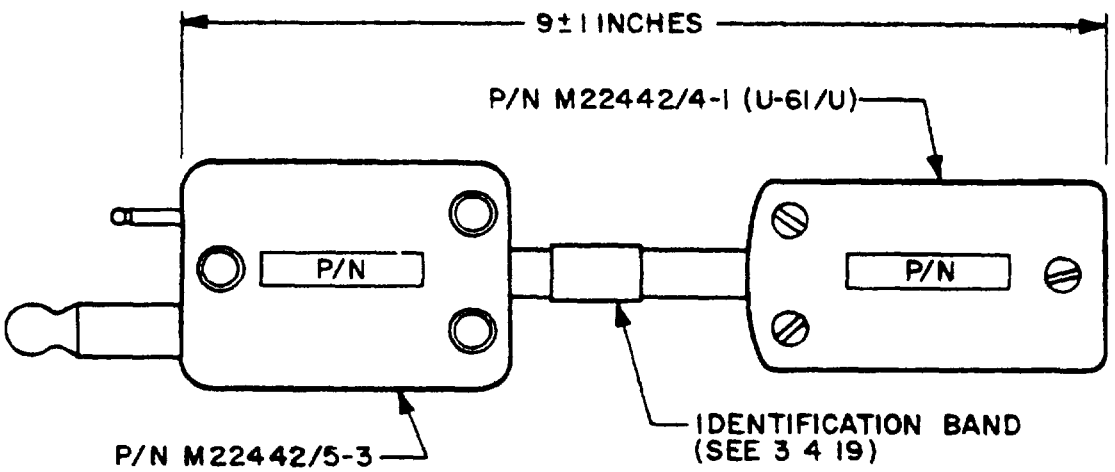


FIGURE 1. Cable assembly P/N M22442/39-1.

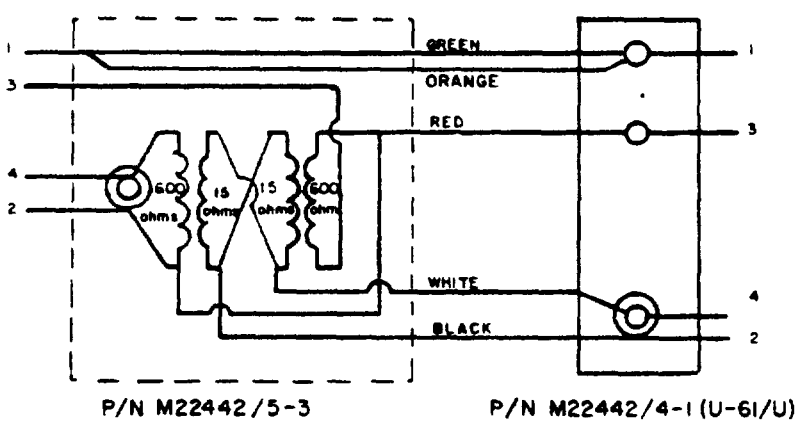


FIGURE 2. Cable assembly P/N M22442/39-1 schematic diagram.

AMSC N/A FSC 5995

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:34Z
Check the source to verify that this is the current version before use.

APPLICABLE DOCUMENTS:

MIL-C-10392 Cord, Electrical (Audio Miniature)

REQUIREMENTS:

1. The cable (cord) shall be in accordance with MIL-C-10392 Type WM-59A/U.

2. The weight of the cable shall not exceed 5.0 ounces.

3. The staycord shall be firmly attached to both connectors.

4. The impedance matching transformers shall be in accordance with M22442/1-7.

5. The DC resistance of the P/N M22442/39-1 cable assembly shall be as indicated when tested with a suitable ohmmeter.

   (a) Contact 2 and contact 4 of P/N M22442/5-3 less than 100 ohms.

   (b) Contact 2 and contact 3 of P/N M22442/5-3 less than 100 ohms.

   (c) Contact 2 of P/N M22442/5-3 and contact 3 of P/N M22442/4-1 (U-61/U) less than 2 ohms.

   (d) Contact 1 of P/N M22442/5-3 and contact 1 of P/N M22442/4-1 (U-61/U) less than 2 ohms.

   (e) Contact 2 and contact 4 of M22442/4-1 (U-61/U) less than 10 ohms.

6. The cable assembly shall be tested in accordance with the tests listed in Table I.

NOTES:

1. The jack on the rear of the M22442/5-3 connector is not used on this cable assembly.

2. All dimensions are in inches.

3. Tolerances are metal parts $\pm$.005, molded sections $\pm$.05 inches unless otherwise specified.

Preparing Activity:
Navy - AS
Project No. 5995-N120-21

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:34Z
Check the source to verify that this is the current version before use.

TABLE I.

Inspection	Requirement Paragraph	Test Paragraph	Group I Qualification Tests	Group II Quality Conformance Test 100%	Group III Sample Testing Per 4.5.1
GROUP A (ALL SAMPLE UNITS) 1/					
Visual & Mechanical Inspection	3.1 & 3.4	4.6.2	X	X	
Soldering	3.4.24	4.6.2.1	X	X	
Transformer Efficiency 2/	5	10a	X		X
Transformer Input Matching Impedance 2/	6	10b	X		X
Transformer Distortion 2/	7	10c	X		X
Transformer dc Winding Resistance 2/	8	10d	X		X
Transformer Output 2/	9	10e	X	X	
Continuity	3.5.3	4.6.5	X	X	
GROUP B					
Dielectric Withstanding Voltage	3.5.5	4.6.7	X		X
Gauging 1/	3.5.6	4.6.8	X		X
Pull Test 1/	3.5.7	4.6.9	X		X
Durometer Hardness	3.5.16	4.6.18	X		X

1/ Minimum tests for OPL retention (see paragraph 4.4.4).
2/ The number indicates the requirement or test specified in MIL-C-22442/1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:34Z
Check the source to verify that this is the current version before use.

TABLE I (Continued).

Inspection	Requirement Paragraph	Test Paragraph	Group I Qualification Tests	Group II Quality Conformance Test 100%	Group III Sample Testing Per 4.5.1
GROUP C					
Durability 1/	3.5.13	4.6.15	X		X
Ozone Resistance 1/	3.5.14	4.6.16	X		X
Jacket Elongation	3.5.15	4.6.17	X		X
GROUP D 1/					
Temperature-Altitude	3.6.1	4.7	X		
Salt Fog	3.6.2	4.7	X		
Vibration	3.6.5	4.7	X		
Shock	3.6.6	4.7	X		
Humidity	3.6.6	4.7	X		
Thermal Shock	3.6.6	4.7	X		

1/ Minimum tests for QPL retention (see paragraph 4.4.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:34Z
Check the source to verify that this is the current version before use.