MILITARY SPECIFICATION SHEET

CABLE ASSEMBLY, RADIO FREQUENCY (AIRCRAFT AUDIO)

This specification sheet is approved for use by the Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the cable described herein shall consist of this document and the latest issue of specification MIL-C-22442.

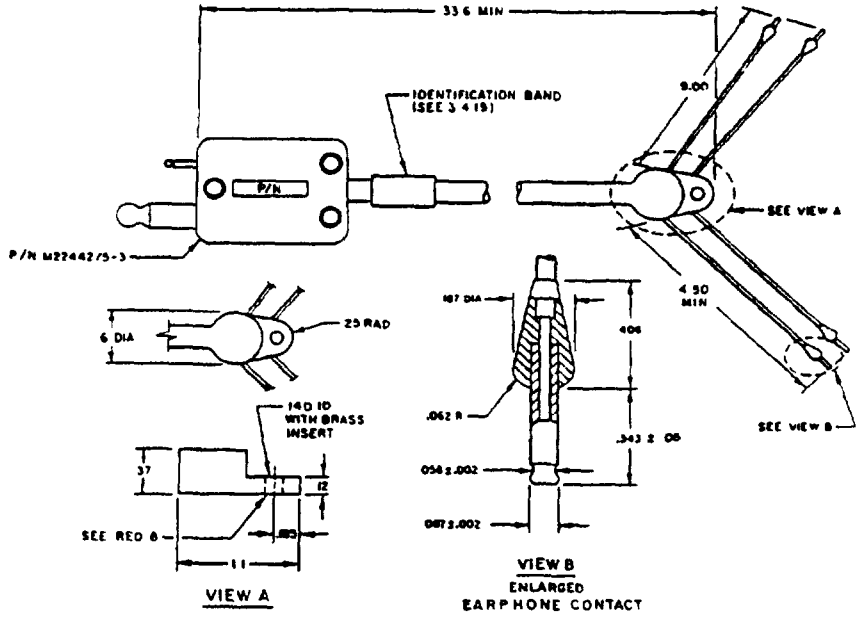


FIGURE 1. Cable assembly P/N M22442/40-1.

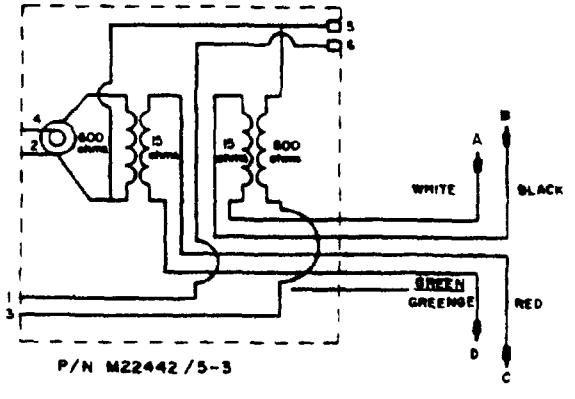


FIGURE 2. Cable assembly P/N M22442/40-1 schematic diagram.

AMSC N/A FSC 5995

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:34Z
Check the source to verify that this is the current version before use.

APPLICABLE DOCUMENTS:

MIL-C-10392	Cord, Electrical (Audio Miniature)
MIL-R-6855	Rubber Synthetic, Sheets, Strips, Molded or Extruded Shapes

REQUIREMENTS:

1. The cable (cord) shall be in accordance with MIL-C-10392 Type WM-59A/U. The orange wire shall not be terminated.

2. The weight of the cable shall not exceed 5.0 ounces.

3. The staycord shall be firmly attached to both connectors.

4. Material for molded parts shall be black synthetic rubber in accordance with MIL-R-6855, Class II, Type A, Grade 60.

5. The impedance matching transformers shall be in accordance with M22442/1-7.

6. The DC resistance of the P/N M22442/40-1 cable assembly shall be as indicated when tested with a suitable ohmmeter.

   (a) Contact 2 and contact 4 of P/N M22442/5-3 less than 100 ohms.

   (b) Contact 2 and contact 3 of P/N M22442/5-3 less than 100 ohms.

   (c) Contact 2 and contact 5 of P/N M22442/5-3 less than 2 ohms.

   (d) Contact 1 and contact 6 of P/N M22442/5-3 less than 2 ohms.

   (e) Contact A and contact B less than 10 ohms.

   (f) Contact C and contact D less than 10 ohms.

7. The cable assembly shall be tested in accordance with the tests listed in Table I.

8. .140 diameter brass insert. Staycord shall be firmly attached to insert.

NOTES:

1. All dimensions are in inches.

2. Tolerances are metal parts ±.005, molded sections ±.05 inches unless otherwise specified.

3. This slash sheet supersedes telephonics cable assembly P/N 20039.

Preparing Activity:
Navy - AS
Project No. 5995-N120-22

Source: https://assist.dla.mil -- Downloaded: 202640-19T12:34Z
Check the source to verify that this is the currentversion before use.

TABLE I.

Inspection	Requirement Paragraph	Test Paragraph	Group I Qualification Tests	Group II Quality Conformance Test 100%	Group III Sample Testing Per 4.5.1
GROUP A (ALL SAMPLE UNITS) 1/					
Visual & Mechanical Inspection	3.1 & 3.4	4.6.2	X	X	
Soldering	3.4.24	4.6.2.1	X	X	
Transformer Efficiency 2/	5	10a	X		X
Transformer Input Matching Impedance 2/	6	10b	X		X
Transformer Distortion 2/	7	10c	X		X
Transformer dc Winding Resistance 2/	8	10d	X		X
Transformer Output 2/	9	10e	X	X	
Continuity	3.5.3	4.6.5	X	X	
GROUP B					
Dielectric Withstanding Voltage	3.5.5	4.6.7	X		X
Gauging 1/	3.5.6	4.6.8	X		X
Pull Test 1/	3.5.7	4.6.9	X		X
Bend Relief Flexibility	3.5.10	4.6.12	X		X
Durometer Hardness	3.5.16	4.6.18	X		X

1/ Minimum tests for QPL retention (see paragraph 4.4.4).
2/ The number indicates the requirement or test specified in MIL-C-22442/1.

Source: https://assist.dla.mil -- Downloaded: 202610-19T12:34Z
Check the source to verify that this is the current version before use.

TABLE I (Continued).

Inspection	Requirement Paragraph	Test Paragraph	Group I Qualification Tests	Group II Quality Conformance Test 100%	Group III Sample Testing Per 4.5.1
GROUP C					
Low Temperature Flexibility	3.5.11	4.6.13	X		X
Durability 1/	3.5.13	4.6.15	X		X
Ozone Resistance 1/	3.5.14	4.6.16	X		X
Jacket Elongation	3.5.15	4.6.17	X		X
GROUP D 1/					
Temperature-Altitude	3.6.1	4.7	X		
Salt Fog	3.6.2	4.7	X		
Vibration	3.6.5	4.7	X		
Shock	3.6.6	4.7	X		
Humidity	3.6.6	4.7	X		
Thermal Shock	3.6.6	4.7	X		

1/ Minimum tests for QPL retention (see paragraph 4.4.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:34Z
Check the source to verify that this is the current version before use.