INCH-POUND
MIL-DTL-22442/40A(AS)
5 January 1998
SUPERSEDING
MIL-C-22442/40(AS)
2 September 1988

DETAIL SPECIFICATION SHEET

CABLE ASSEMBLY, AIRCRAFT AUDIO

This specification sheet is approved for use by the Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-22442 listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation

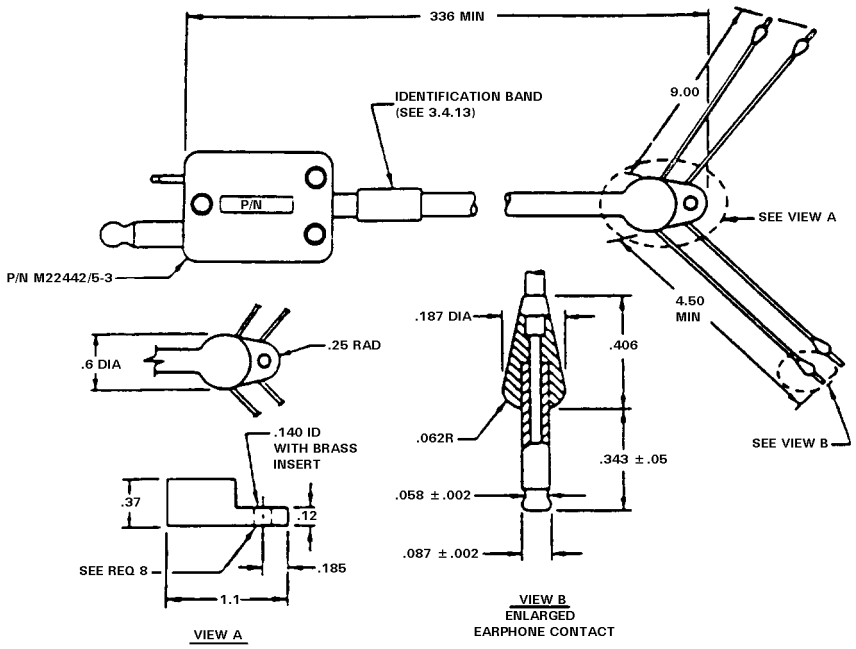

FIGURE 1. Cable assembly P/N M22442/40-1 Schematic Diagram.

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:34Z
Check the source to verify that this is the current version before use.

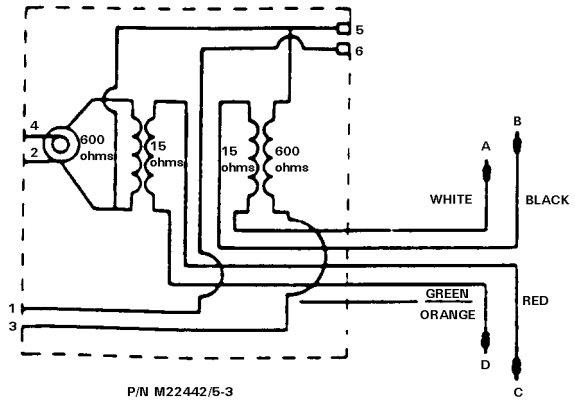

FIGURE 2. Cable assembly P/N M22442/40-l Schematic Diagram.

APPLICABLE DOCUMENTS:

MIL-C- 10392 - Cord, Electrical (Audio Miniature)

REQUIREMENTS:

*1. The cable (cord) shall be in accordance with the requirements of MIL-C-10392 Type WM-59A/U or equal.

2. The weight of the cable shall not exceed 5.0 ounces.

3. The staycord shall be firmly attached to both connectors.

4. The impedance matching transformers shall be in accordance with M22442/1-7.

5. The DC resistance of the PIN M22442/40-l cable assembly shall be as indicated when tested with a suitable ohmmeter.

(a). Contact 2 and contact 4 of P/N M22442/5-3 less than l00 ohms.

(b). Contact 2 and contact 3 of P/N M22442/5-3 less than l00 ohms.

(c). Contact 2 and contact 5 of P/N M22442/5-3 less than 2 ohms.

(d). Contact l and contact 6 of P/N M22442/5-3 less than 2 ohms.

(e). Contact A and contact B less than l0 ohms.

(f). Contact C and contact D less than l0 ohms.

6. The cable assembly shall be tested in accordance with the tests listed in Table I.

7. .140 diameter brass insert. Staycord shall be firmly attached to insert.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:34Z
Check the source to verify that this is the current version before use.

NOTES:

1. All dimensions are in inches.

2. Tolerances are metal parts ±.005, molded sections ±.05 inches unless otherwise specified.

3. This slash sheet supersedes Telephonics cable assembly P/N 20039.

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with asterisks to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Preparing activity:
Navy - AS
(Project No. 5995-0128-18)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:34Z
Check the source to verify that this is the current version before use.

TABLE I. Tests

Inspection	Requirement Paragraph	Test Paragraph	Group I Qualification Tests	Group II Quality Conformance Test 100%	Group III Sample Testing Per 4.4.1
GROUP A (ALL SAMPLE UNITS) 1/					
Visual & Mechanical Inspection	3.1 & 3.4	4.5.2	X	X	
Soldering	3.4.18	4.5.2.1	X	X	
Transformer Efficiency 2/	5	10a	X		X
Transformer Input Matching Impedance 2/	6	10b	X		X
Transformer Distortion 2/	7	10c	X		X
Transformer dc Winding Resistance 2/	8	10d	X		X
Transformer Output 2/	9	10e	X	X	
Continuity	3.5.1	4.5.3	X	X	

1/ Minimum tests for QPL retention (see paragraph 4.3 3)
2/ The number indicates the requirement or test specified in MIL-DTL-22442/1

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:34Z
Check the source to verify that this is the current version before use.

TABLE I. Tests (Continued).

Inspection	Requirement Paragraph	Test Paragraph	Group I Qualification Tests	Group II Quality Conformance Test 100%	Group III Sample Testing Per 4.4.1
GROUP B					
Dielectric Withstanding Voltage	3.5.2	4.5.4	X		X
Gauging 1/	3.5.3	4.5.5	X		X
Pull and Twist Test 1/	3.5.4	4.5.6	X		X
Durometer Hardness	3.5.10	4.5.12	X		X
Bend Relief Flexibility	3.5.5	4.5.7	X		X
GROUP C					
Low Temperature Flexibility	3.5.6	4.5.8	X		X
Durability 1/	3.5.7	4.5.9	X		X
Ozone Resistance 1/	3.5.8	4.5.10	X		X
Jacket Elongation	3.5.9	4.5.11	X		X
GROUP D 1/					
Salt Fog	3.6.2	4.6.2	X		
Vibration	3.6.4	4.6.4	X		
Humidity	3.6.5	4.6.5	X		
Thermal Shock	3.6.5	4.6.6	X		

l/ Minimum tests for QPL retention (see paragraph 4.3.3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:34Z
Check the source to verify that this is the current version before use.