DETAIL SPECIFICATION SHEET

CABLE ASSEMBLY, AIRCRAFT AUDIO, AH-1J AND AH-1T AIRCRAFT CABLE

This specification sheet is approved for use by the Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-22442 listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

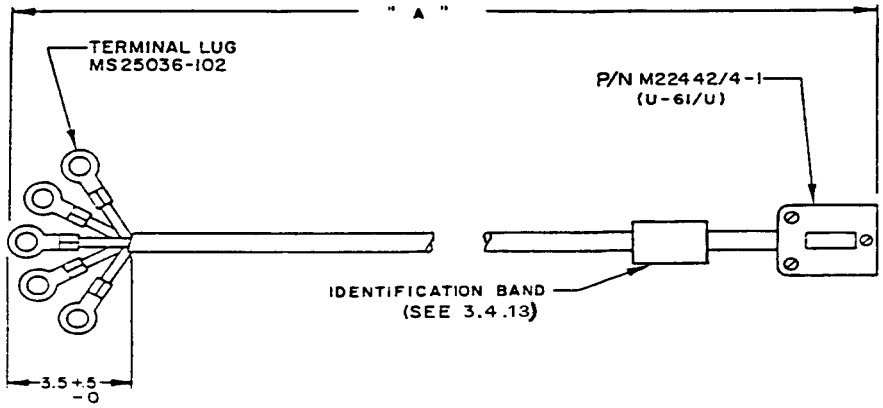

FIGURE 1. Cable assembly P/N M22442/53-X

Dimension A	Part Number
61.0 min.	M22442/53-1
87.0 min.	M22442/53-2

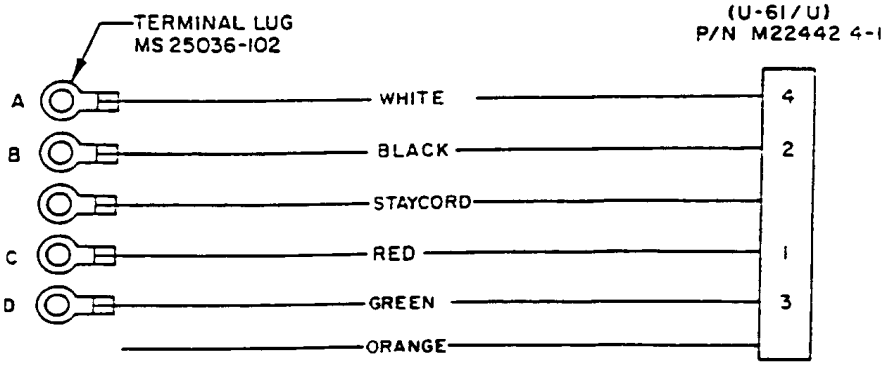

FIGURE 2. Cable assembly P/N M22442/53-1 & 2 Schematic Diagram.

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited
Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:36Z
Check the source to verify that this is the current version before use.

APPLICABLE DOCUMENTS:

MIL-C-10392	-	Cord, Electrical (Audio Miniature)
MS25036	-	Terminal, Lug, Crimp Style, Copper, Insulated, Ring, Tongue, Bell-Mounted, Type II, Class 1 (for 105 Degree C total conductor Temperature)

REQUIREMENTS:

*1. The cable (cord) shall be in accordance with the requirements of MIL-C-10392 Type WM-59A/U or equal.

2. The ring terminal shall be brass with nickel finish.

3. The weight of the cable assembly shall not be greater than 14 ounces.

4. The stay cord shall be firmly attached to the connectors.

5. The DC resistance shall be less than 2 ohms between the following contacts when tested with an ohmmeter.

(a) Contact A and contact 4 of P/N M22442/4-1 (U-61/U).

(b) Contact B and contact 2 of P/N M22442/4-1 (U-61/U).

(c) Contact C and contact 1 of P/N M22442/4-1 (U-61/U).

(d) Contact D and contact 3 of P/N M22442/4-1 (U-61/U).

6. The cable assembly shall be tested in accordance with the tests listed in Table II.

NOTES:

1. All dimensions are in inches.

2. Tolerances are ± .25 inch unless otherwise specified.

Preparing activity:
Navy - AS
(Project No. 5995-0128-34)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:36Z
Check the source to verify that this is the current version before use.

TABLE II. Tests

Inspection	Requirement Paragraph	Test Paragraph	Group I Qualification Tests	Group II Quality Conformance Test 100%	Group III Sample Testing Per 4.4.1
GROUP A (ALL SAMPLE UNITS) 1/					
Visual & Mechanical Inspection	3.1 & 3.4	4.5.2	X	X	
Soldering	3.4.18	4.5.2.1	X	X	
Continuity	3.5.1	4.5.3	X	X	
GROUP B					
Dielectric Withstanding Voltage	3.5.2	4.5.4	X		X
Pull and Twist Test 1/	3.5.4	4.5.6	X		X
GROUP C					
Durability 1/	3.5.7	4.5.9	X		X
Ozone Resistance 1/	3.5.8	4.5.10	X		X
Jacket Elongation	3.5.9	4.5.11	X		X
GROUP D 1/					
Salt Fog	3.6.2	4.6.2	X		
Vibration	3.6.4	4.6.4	X		
Humidity	3.6.5	4.6.5	X		
Thermal Shock	3.6.5	4.6.6	X		

l/ Minimum tests for QPL retention (see paragraph 4.3.3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:36Z
Check the source to verify that this is the current version before use.