INCH-POUND
MIL-DTL-22442/57A(AS)
5 January 1998
SUPERSEDING
MIL-C-22442/57(AS)
14 November 1988

DETAIL SPECIFICATION SHEET

CABLE ASSEMBLY, AIRCRAFT AUDIO, CX-13l65/A AH-1T & AH-1W

This specification sheet is approved for use by the Naval Air Systems Command, Department of the Navy. and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-22442 listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation

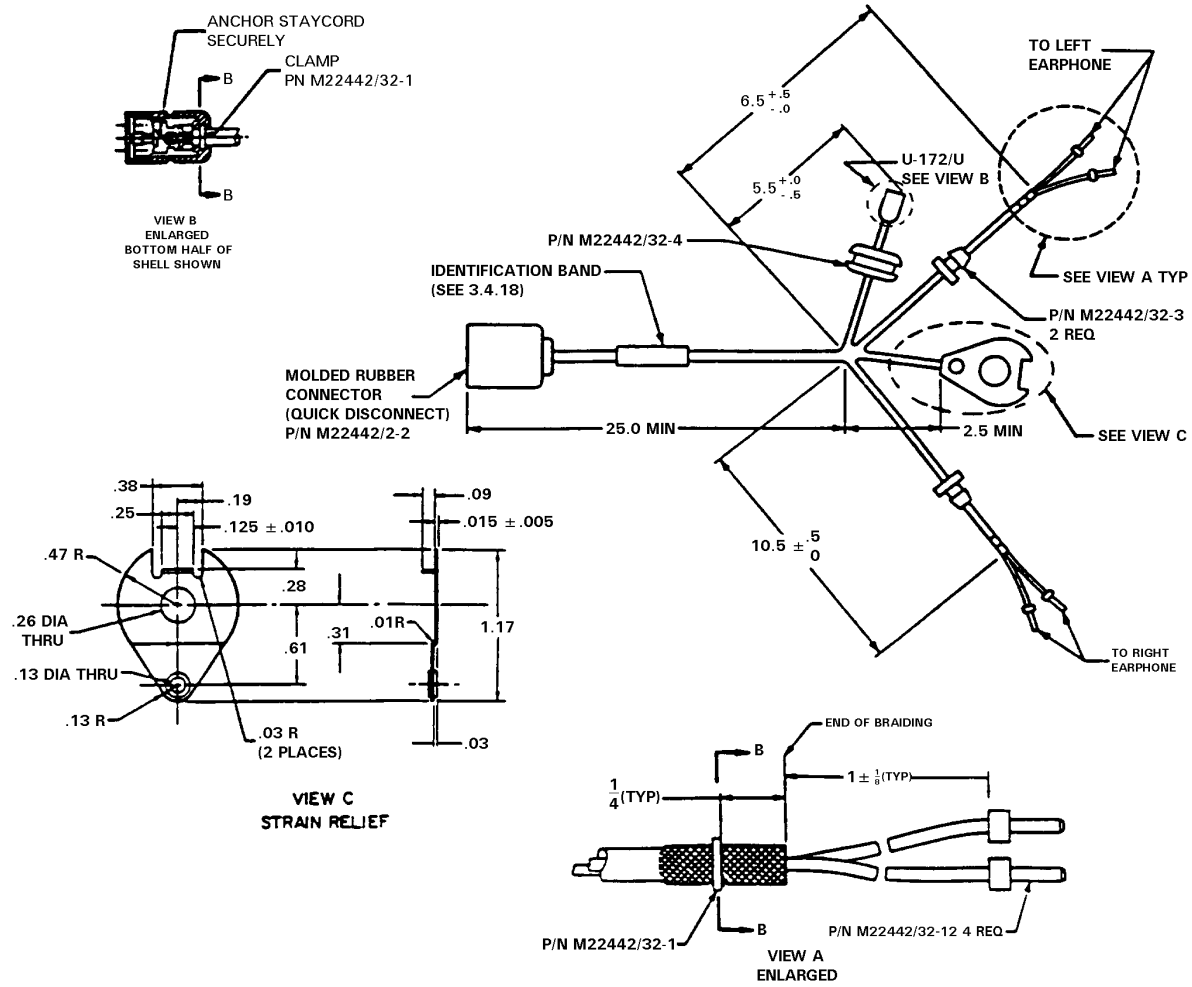


FIGURE 1. Cable assembly P/N M22442/57-1.

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:36Z
Check the source to verify that this is the current version before use.

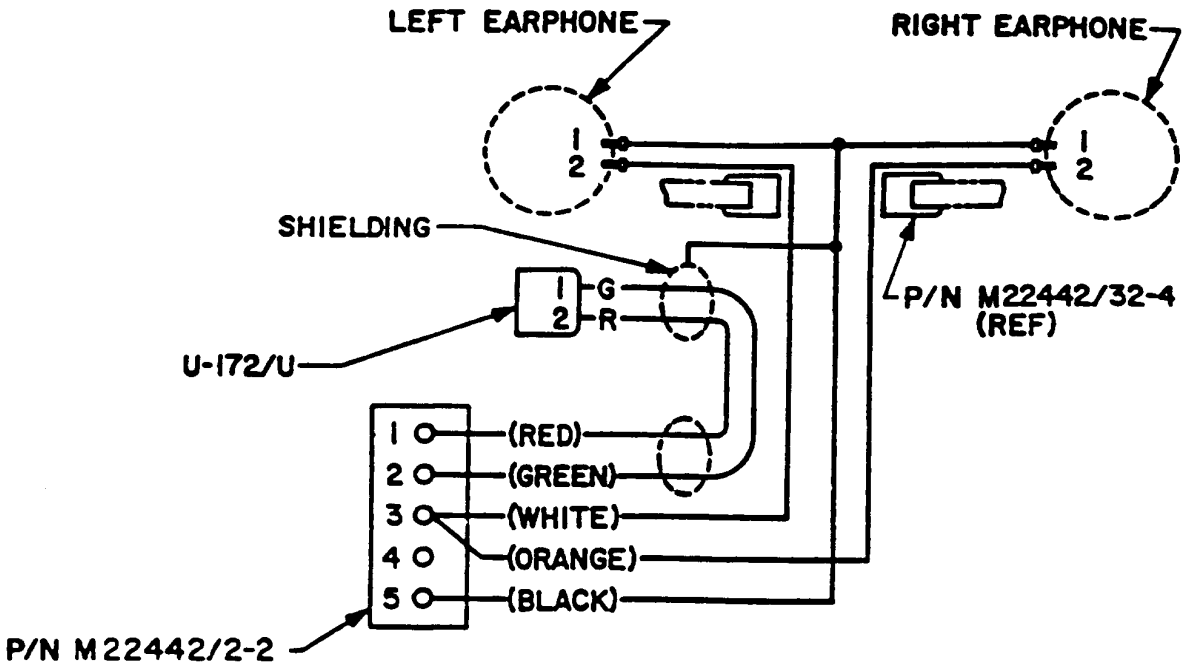


FIGURE 2. Cable assembly P/N M22442/57-1 CX-13165/A Schematic Diagram.

APPLICABLE DOCUMENTS:

MIL-F-14072 - Finishes for Ground Based Electronic Equipment

* Non-Government Publications. The following documents forms a part of this specification to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted shall be those listed in the issue of the DoDISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DoDISS are the issues of the documents cited in the solicitations (see 6.3).

SAE INTERNATIONAL

SAE-AMS 5901 - Steel Sheet, Strip, and Plate, Corrosion Resistant 18 Cr, 8 Ni (SAE 30301) Solution, Heat-treated (DoD Adopted)

(Application for copies should be addressed to SAE International, 400 Commonwealth Dr., Warrendale, PA 15096)

REQUIREMENTS:

l. The cable (cord) shall be in accordance with M22442/35-3.

2. The weight of the cable assembly shall not be greater than 3 ounces.

3. The staycord shall be firmly attached to the connectors and strain relief.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:36Z
Check the source to verify that this is the current version before use.

4. The DC resistance shall be less than 2 ohms between the following contacts:

(a) Contact l of P/N M22442/2-2 and contact 2 of U-l72/U.

(b) Contact 2 of P/N M22442/2-2 and contact l of U-l72/U.

(c) Contact 3 of P/N M22442/2-2 and contact 2 of the left earphone contact.

(d) Contact 3 of P/N M22442/2-2 and contact 2 of the right earphone contact.

(e) Contact 5 of P/N M22442/2-2 and contact l of the left earphone contact and contact l of the right earphone contact.

5. The following parts shall be supplied in a plastic bag with each cable:

(a) One P/N M22442/32-5 nut, tee.

(b) One P/N M22442/32-6 screw, visor housing.

(c) One P/N M22442/32-7 clip, cable.

* 6. The strain relief shall be made of 22 GA CRES, AISI Grade 301 in accordance with SAE-AMS 5901 or equivalent (as approved by the qualifying activity), and shall be passivated in accordance with MIL-F-14072 E300 or equivalent (as approved by the qualifying activity).

7. The cable assembly shall be tested in accordance with the tests listed in Table I.

NOTES:

l. All dimensions are in inches.

2. Tolerances are as follows: Metal parts ±.005, Molded Sections ±.05.

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with asterisks to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Preparing activity:
Navy - AS
(Project No. 5995-0l28-21)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:36Z
Check the source to verify that this is the current version before use.

TABLE I. Tests

Inspection	Requirement Paragraph	Test Paragraph	Group I Qualification Tests	Group II Quality Conformance Test 100%	Group III Sample Testing Per 4.4.1
GROUP A (ALL SAMPLE UNITS) 1/					
Visual & Mechanical Inspection	3.1 & 3.4	4.5.2	X	X	
Soldering	3.4.18	4.5.2.1	X	X	
Continuity	3.5.1	4.5.3	X	X	
GROUP B					
Dielectric Withstanding Voltage	3.5.2	4.5.4	X		X
Gauging 1/	3.5.3	4.5.5	X		X
Bend Relief Flexibility	3.5.5	4.5.7	X		X
Durometer Hardness	3.5.10	4.5.12	X		X
GROUP C					
Low Temperature Flexibility	3.5.6	4.5.8	X		X
Durability 1/	3.5.7	4.5.9	X		X
GROUP D 1/					
Salt Fog	3.6.2	4.6.2	X		
Humidity	3.6.5	4.6.5	X		
Thermal Shock	3.6.5	4.6.6	X		

l/ Minimum tests for QPL retention (see paragraph 4.3.3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:36Z
Check the source to verify that this is the current version before use.