INCH POUND

MIL-C-22442/61(AS)
30 June 1994

MILITARY SPECIFICATION SHEET

CABLE ASSEMBLY, RADIO FREQUENCY (AIRCRAFT AUDIO)

This specification is approved for use by the Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation MIL-C-22442

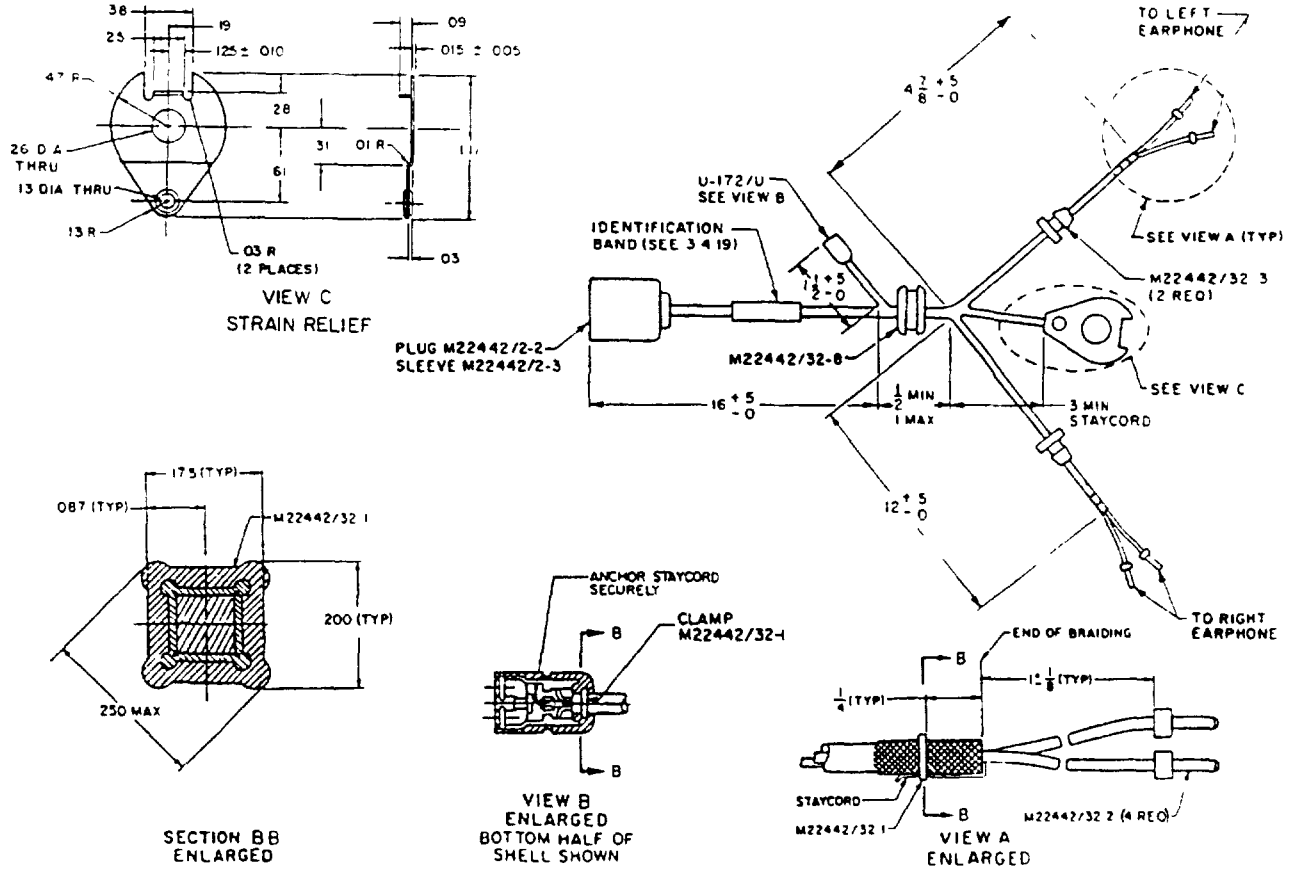


FIGURE 1 Cable assembly P/N M22442/61-1

AMSC N/A FSC 5995

DISTRIBUTION STATEMENT A Approved for public release distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:36Z
Check the source to verify that this is the current version before use.

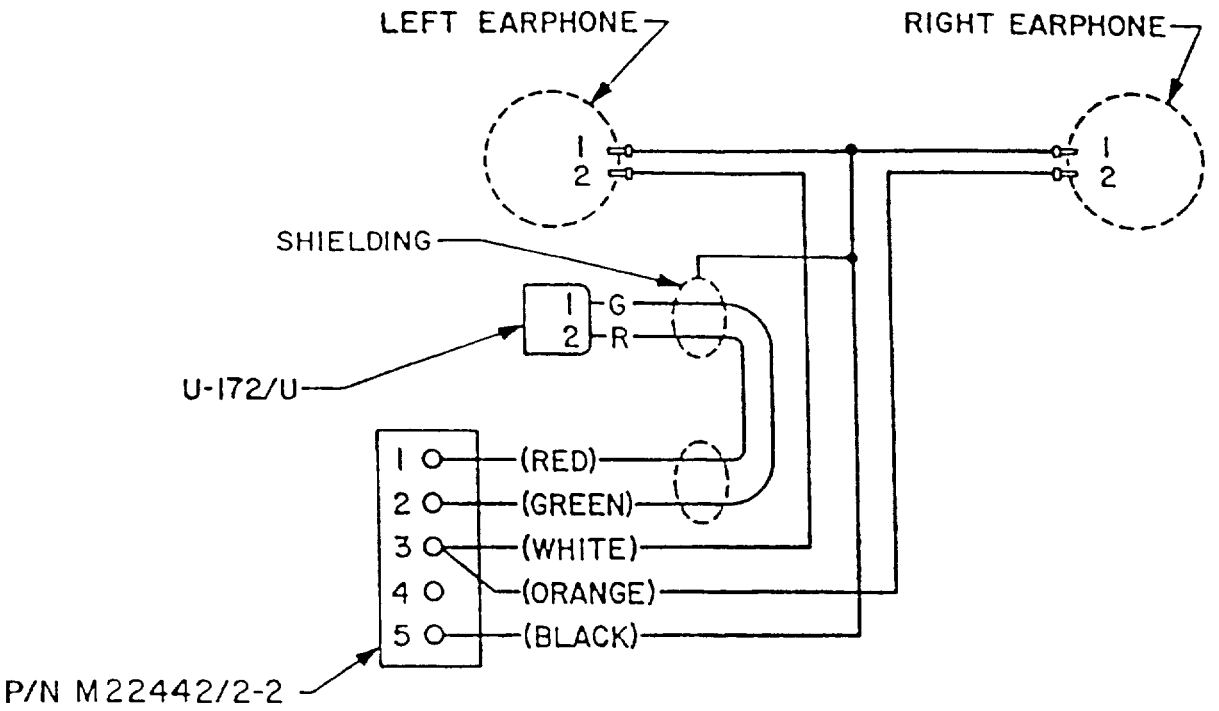


FIGURE 2 Cable assembly P/N M22442/61-1 schematic diagram

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:36Z
Check the source to verify that this is the current version before use.

APPLICABLE DOCUMENTS

MIL-F-14072 - Finishes for Ground Based Electronic Equipment

SAE-AMS 5901 - Sheet, Strip, Plate, 18 Cr, 8 Ni Solution, Heat-treated

REQUIREMENTS

1 The cable (cord) shall be in accordance with M22442/35-3

2 The weight of the cable assembly shall not be greater than 3 ounces

3 The staycord shall be firmly attached to the connectors and strain relief

4 The DC resistance shall be less than 2 ohms between the following contacts

(a) Contact 1 of P/N M22442/2-2 and contact 2 of U-172/U

(b) Contact 2 of P/N M22442/2-2 and contact 1 of U-172/U

(c) Contact 3 of P/N M22442/2-2 and contact 2 of the left earphone contact

(d) Contact 3 of P/N M22442/2-2 and contact 2 of the right earphone contact

(e) Contact 5 of P/N M22442/2-2 and contact 1 of the left earphone contact and contact 1 of the right earphone contact

5 The following parts shall be supplied in a plastic bag with each cable

(a) One P/N M22442/32-5 nut, tee

(b) One P/N M22442/32-6 screw, visor housing

(c) One P/N M22442/32-7 clip, cable

6 The strain relief shall be made of 22 GA Cres AISI Grade 301 in accordance with SAE-AMS 5901 and shall be passivated in accordance with MIL-F-14072 E300

7 The cable assembly shall be tested in accordance with the tests listed in Table I

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:36Z
Check the source to verify that this is the current version before use.

TABLE I. Tests

Inspection	Requirement Paragraph	Test Paragraph	Group I Qualification Tests	Group II Quality Conformance Test 100%	Group II Sample Testing Per 4.5.1
GROUP A (All sample units) 1/					
Visual and mechanical inspection	3.1 & 3.4	4.6.2	X	X	
Soldering	3.4.24	4.6.2.1	X	X	
Continuity	3.5.3	4.6.5	X	X	
GROUP B					
Dielectric withstanding voltage	3.5.5	4.6.7	X		X
Gauging 1/	3.5.6	4.6.8	X		X
Bend relief flexibility	3.5.10	4.6.12	X		X
Durometer hardness	3.5.16	4.6.18	X		X
GROUP C					
Low temperature flexibility	3.5.11	4.6.13	X		X
Durability 1/	3.5.13	4.6.15	X		X
GROUP D 1/					
Temperature-Altitude 2/	3.6.1	4.7	X		
Salt fog	3.6.2	4.7	X		
Shock	3.6.6	4.7	X		
Humidity	3.6.6	4.7	X		
Thermal shock	3.6.6	4.7	X		

1/ Minimum tests for QPL retention (see paragraph 4.4.4)
2/ Steps 3 and 12 only

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:36Z
Check the source to verify that this is the current version before use.

NOTES

1 All dimensions are in inches

2 Tolerances are as follows

Metal parts ± 005
Molded sections ± 05

Preparing activity
Navy - AS

(Project No 5995-0123)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:36Z
Check the source to verify that this is the current version before use.

Commanding Officer
Naval Air Warfare Center Aircraft Division Lakehurst
Systems Requirements Department (Code SR3)
Highway 547
Lakehurst, NJ 08733-5100

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:36Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8 In block 1, both the document number and revision letter should be given
2. The submitter of this form must complete blocks 4, 5, 6, and 7
3 The preparing activity must provide a reply within 30 days from receipt of the form

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2 DOCUMENT DATE (YYMMDD)
	MIL-C-22442/61(AS)	940630

3 DOCUMENT TITLE
CABLE ASSEMBLY, RADIO FREQUENCY (AIRCRAFT AUDIO)

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible Attach extra sheets as needed)

5 REASON FOR RECOMMENDATION

6 SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8 PREPARING ACTIVITY

a NAME COMMANDING OFFICER, NAVAL AIR WARFARE CENTER AIRCRAFT DIVISION LAKEHURST, SYSTEMS REQUIREMENTS DEPARTMENT	b TELEPHONE (Include Area Code) (1) Commercial (908) 323-7488	(2) AUTOVON 624-7488
ADDRESS (Include Zip Code) CODE SR3, HIGHWAY 547, LAKEHURST, NJ 08733-5100	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT Defense Quality and Standardization Office 5203 Leesburg Pike Suite 1403 Falls Church, VA 22041 3466 Telephone (703) 756 2340 AUTOVON 289 2340	

DD Form 1426, OCT 89 Previous editions are obsolete

Source: https://assist.dla.mil - Downloaded: 2026-10-19T12:36Z
Check the source to verify that this is the current version before use.