INCH-POUND

MIL-DTL-22442/62A(AS)
14 May 2009
SUPERSEDING
MIL-DTL-22442/62(AS)
14 April 2009

DETAIL SPECIFICATION SHEET

CABLE ASSEMBLY, AIRCRAFT AUDIO

This specification sheet is approved for use by the Naval Air Systems Command, Department of the Navy and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-22442.

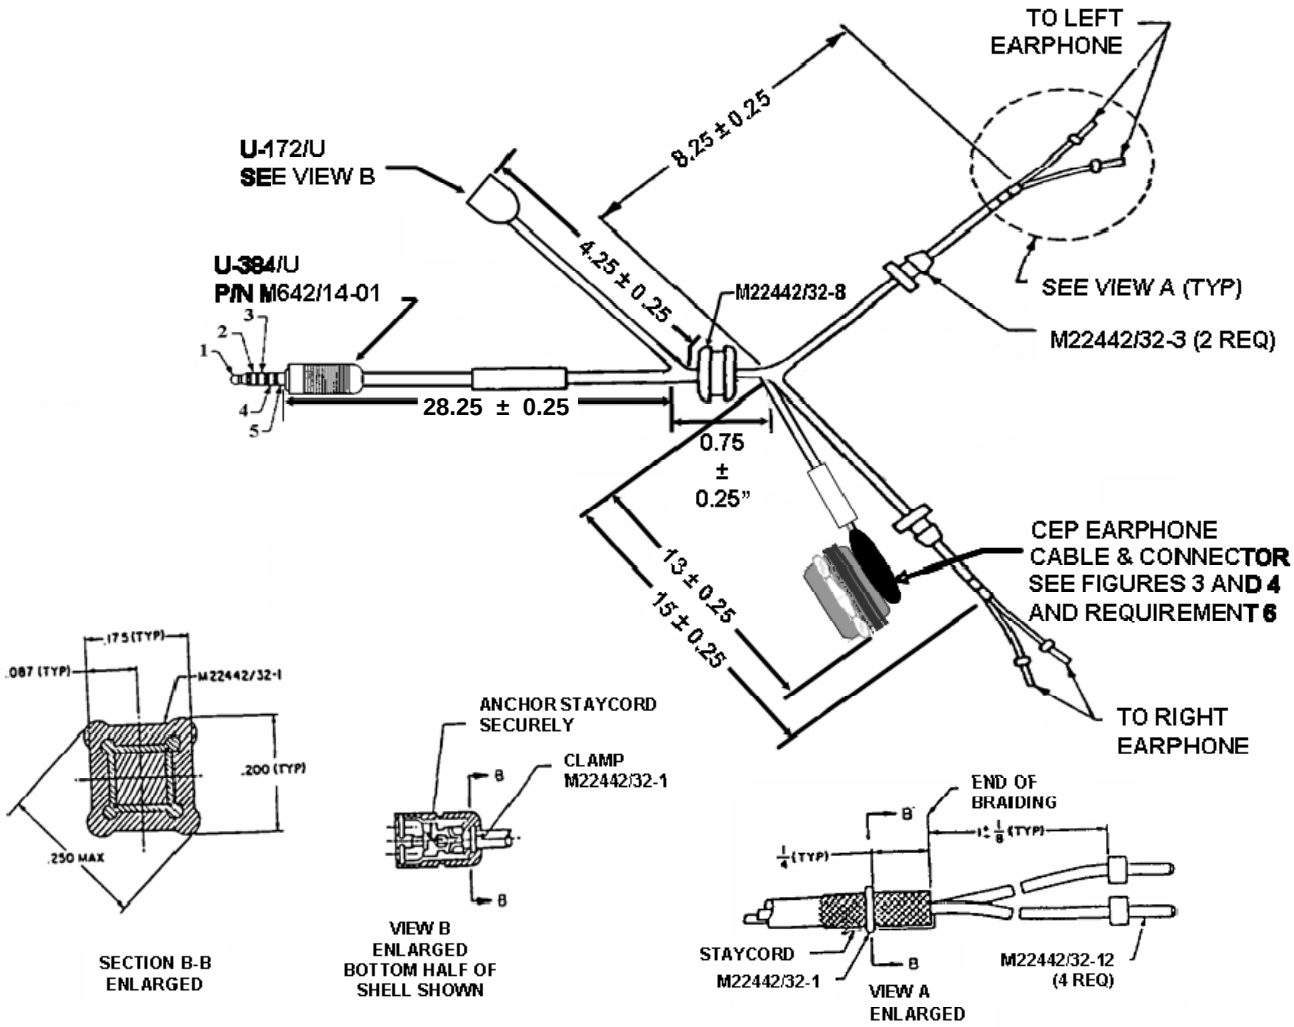


FIGURE lA. Cable assembly P/N M22442/62-1 and P/N M22442/62-2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:37Z
Check the source to verify that this is the current version before use.

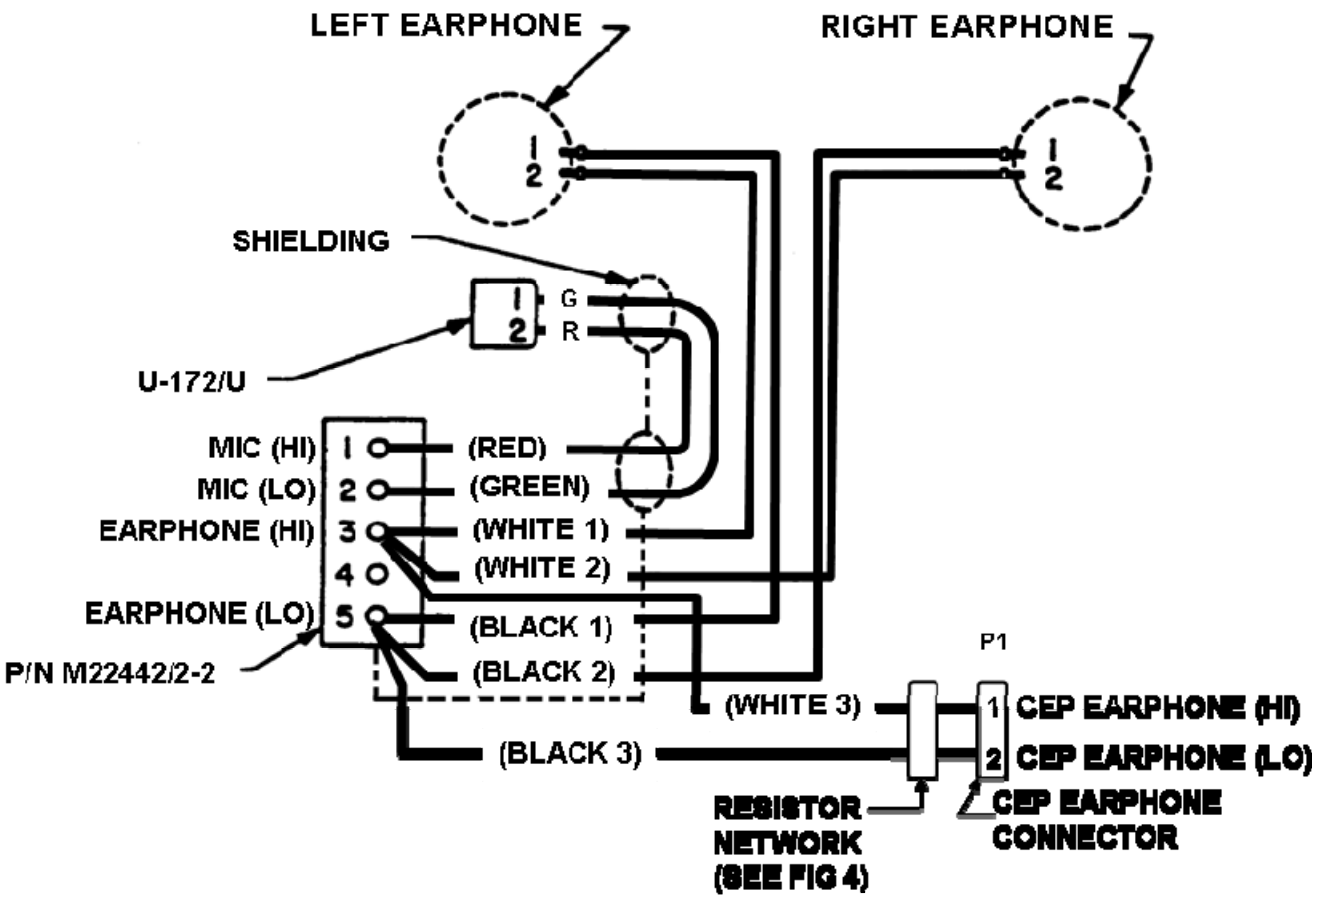


FIGURE 1B. Cable assembly P/N M22442/62-1 and M22442/62-2 schematic diagram.

APPLICABLE DOCUMENTS

MIL-DTL-14072 - Finishes for Ground Based Electronic Equipment

(Copies of these documents are available online at http://assist.daps.dla.mil/quicksearch/ or from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA. 19111-5094.)

Non-Government publications. The following document forms a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

SOCIETY OF AUTOMOTIVE ENGINEERS INTERNATIONAL

SAE-AMS 5901 - Steel, Corrosion Resistant, Sheet, Strip, and Plate 18 Cr- 8 Ni (SAE 30301), Solution Heat Treated (DoD Adopted)

(Application for copies should be addressed to SAE International, 400 Commonwealth Drive, Warrendale, PA 15096.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:37Z
Check the source to verify that this is the current version before use.

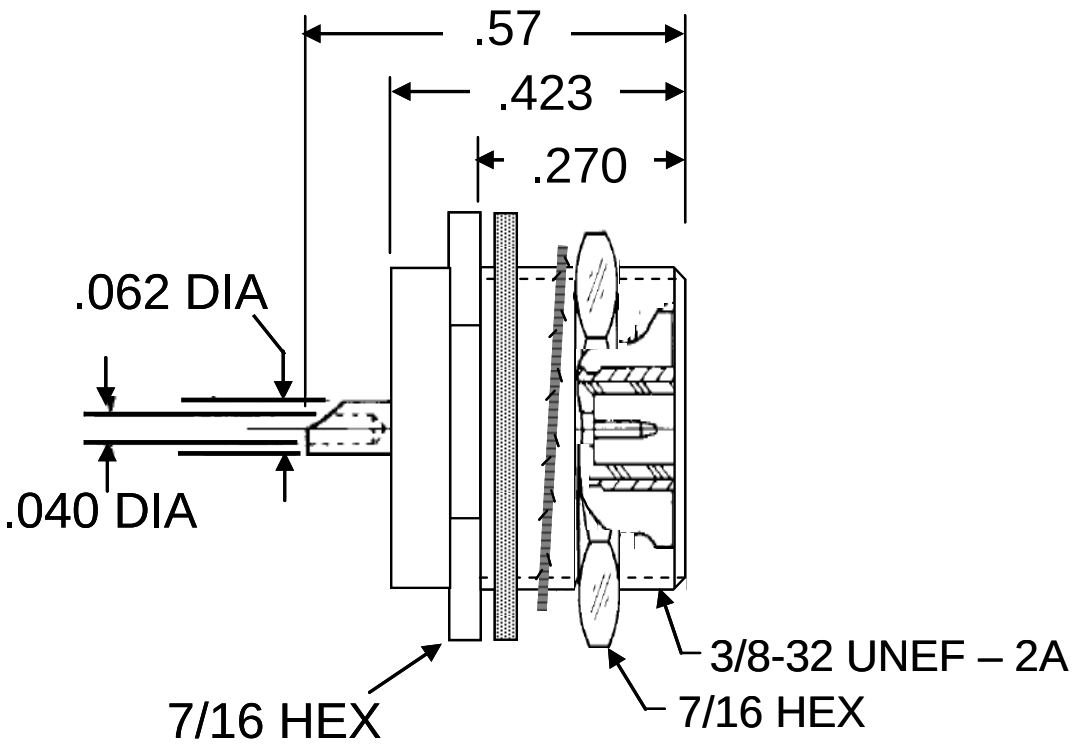


FIGURE 3A. CEP earphone connector, recessed SMB straight male jack, bulkhead rear mount, solder pot receptacle, gold plated, and terminal.

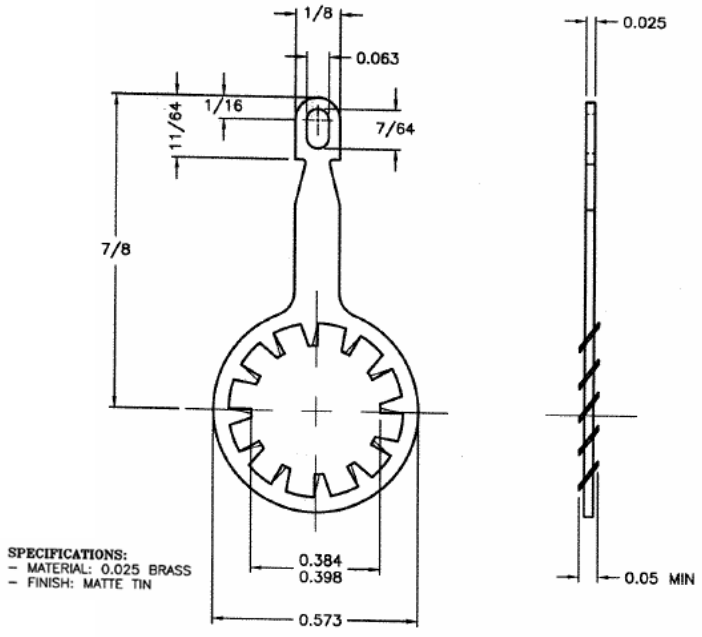


FIGURE 3B. Terminal, lockwasher, thick brass, matte tin finish.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:37Z
Check the source to verify that this is the current version before use.

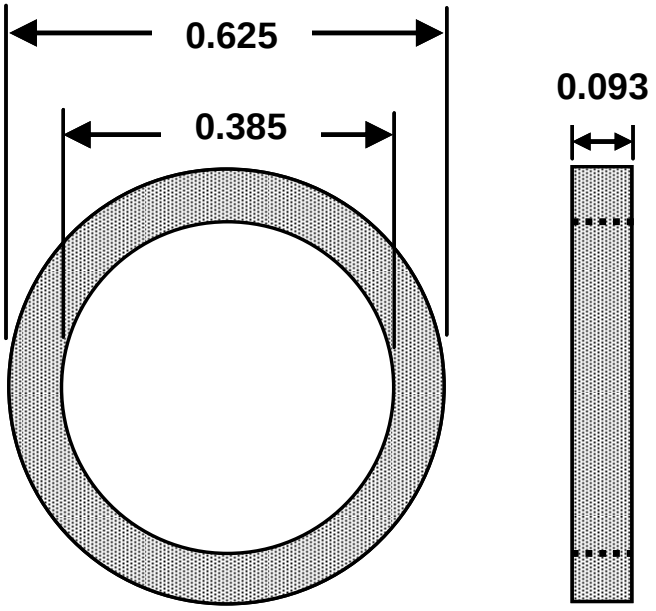


FIGURE 3C. ABS spacer for CEP connector (not included in P/N SK-1399-1).

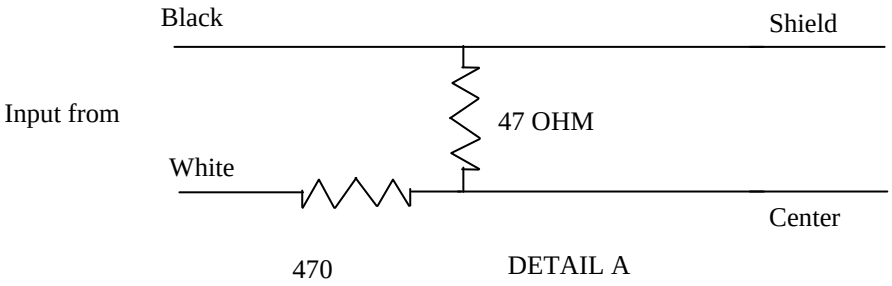


FIGURE 4. CEP earphone cable assembly schematic diagram.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:37Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

1. The cable (cord) shall be in accordance with M22442/35-3.

2. The weight of the cable assembly shall not be greater than 3 ounces.

3. The staycord shall be firmly attached to the connectors and strain relief.

4. The DC resistance shall be less than 2 ohms between the following contacts (Cable M22442/62-1 and M22442/62-2):
   (a) Contact 1 of P/N M642/14-01 and contact 2 of U-172/U.
   (b) Contact 2 of P/N M642/14-01 and contact 1 of U-172/U.
   (c) Contact 3 of P/N M642/14-01 and contact 2 of the left earphone contact and contact 2 of the right earphone contact.
   (d) Contact 5 of P/N M642/14-01 and contact 1 of the left earphone contact and contact 1 of the right earphone contact.
   (e) Contact 5 of P/N M642/14-01 and contact 2 of the CEP earphone connector contact.

5. The DC resistance shall be as specified between the following contacts (Cable M22442/62-1 and M22442/62-2):
   (a) Contact 3 of P/N M642/14-01 and contact 1 of the CEP earphone connector contact 470 ohms (± 20% tolerance).
   (b) Contact 1 and contact 2 of the CEP earphone connector contact 47 ohms (± 20% tolerance).

6. The CEP earphone connector (Applied Engineering Products, New Haven, CT. Dwg No. SK-1399-1) male bulkhead jack receptacle shall be gold plated.

7. The cable assembly shall be tested in accordance with the tests listed in table I.

8. Cable assemblies M22442/62-1 and M22442/62-2 are identical with the exception that cable M22442/62-2 shall have a maximum length of 6.0 ± .25 from the outer shell of the U-384/U connector to the crotched area.

NOTES

1. All dimensions are in inches.

2. Tolerances are as follows: Metal parts ± .005, Molded sections ± .05.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:37Z
Check the source to verify that this is the current version before use.

TABLE I. Tests.

Inspection	Requirement Paragraph	Test Paragraph	Group I Qualification Tests	Group II Quality Conformance Test 100%	Group III Sample Testing Per 4.4.1
GROUP A (ALL SAMPLE UNITS) 1/					
Visual & Mechanical Inspection	3.2 & 3.4	4.5.2	X	X	
Soldering	3.4.18	4.5.2.1	X	X	
Continuity	3.5.1	4.5.3	X	X	
GROUP B					
Dielectric Withstanding Voltage	3.5.2	4.5.4	X		X
Gauging 1/	3.5.3	4.5.5	X		X
Bend Relief Flexibility	3.5.5	4.5.7	X		X
Pull and Twist Test	3.5.4	4.5.6	X		X
GROUP C					
Low Temperature Flexibility	3.5.6	4.5.8	X		X
Durability 1/	3.5.7	4.5.9	X		X
GROUP D 1/					
Salt Fog	3.6.2	4.6.2	X		
Vibration	3.6.4	4.6.4	X		
Humidity	3.6.5	4.6.5	X		
Thermal Shock	3.6.5	4.6.6	X		

1/ Minimum tests for QPL retention (see 4.3.3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:37Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Preparing activity:
Navy - AS
(Project 5995-2009-004)

NOTE: The activity listed above was interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:37Z
Check the source to verify that this is the current version before use.