INCH-POUND
MIL-DTL-22442/63(AS)
w/AMENDMENT 1
22 February 2007
SUPERSEDING
MIL-DTL-22442/63(AS)
8 December 2006

DETAIL SPECIFICATION SHEET

CABLE ASSEMBLY, AIRCRAFT AUDIO, AWICS CH-46E, CH-53D, CH-53E, AND MH-53E

This specification is approved for use by the Naval Air Systems Command, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-22442.

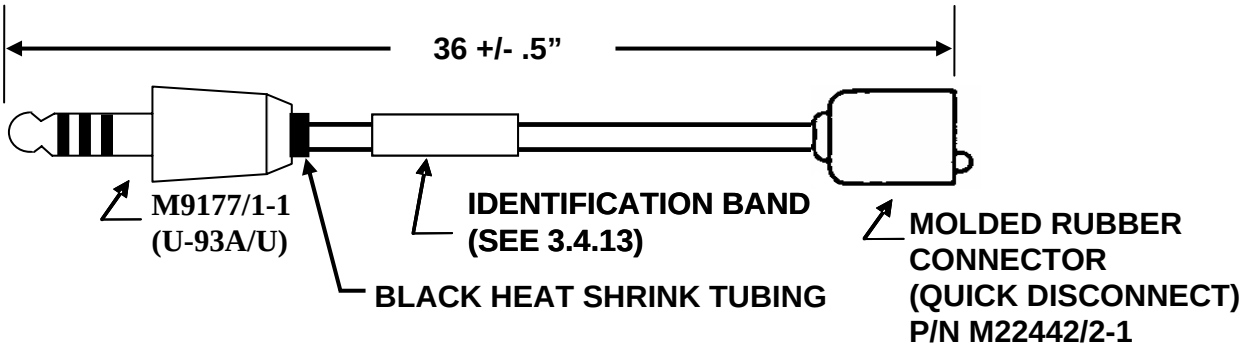


FIGURE l. Cable assembly P/N M22442/63-1.

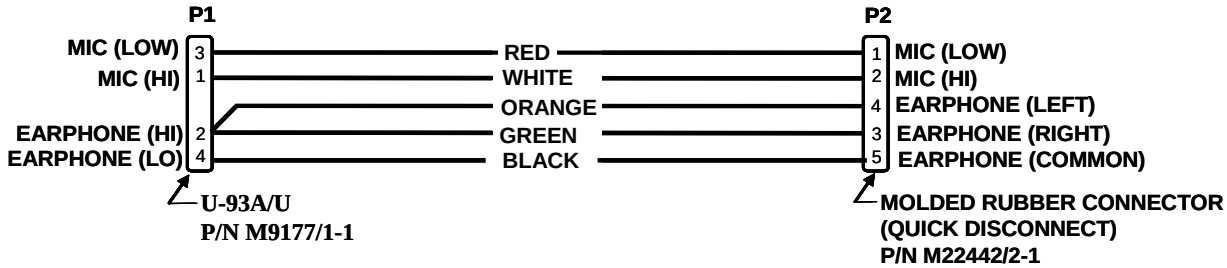


FIGURE 2. Cable assembly P/N M22442/63-1 schematic diagram.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:37Z
Check the source to verify that this is the current version before use.

APPLICABLE DOCUMENTS

MIL-DTL-9177/1	-	Connector, Audio, Airborne, Plug, 4 Contact.
MIL-C-10392	-	Cord, Electrical (Audio, Miniature). (Inactive for new design)

REQUIREMENTS

1. The cable (cord) shall be in accordance with MIL-C-10392 Type WM-59A/U or equal.

2. The weight of the cable assembly shall be not greater than 10 ounces.

3. The staycord shall be firmly attached to the connectors and strain relief. Black tubing is permitted between the U-93A/U and the cable jacket, providing it is secure.

4. The DC resistance shall be less than 2 ohms between the following contacts:

(a) Contact 1 of P/N 9177/1-1 and contact 2 of P/N M22442/2-1.

(b) Contact 2 of P/N 9177/1-1 and contact 3 and 4 of P/N M22442/2-1.

(c) Contact 3 of P/N 9177/1-1 and contact 1 of P/N M22442/2-1.

(d) Contact 4 of P/N 9177/1-1 and contact 5 of P/N M22442/2-1.

5. The label shall be black with white lettering.

6. Black heat shrink tubing shall be used between the U-93A/U connector and the cable jacket to fill void space.

7. The cable assembly shall be tested in accordance with the tests listed in table I.

NOTES

1. All dimensions are in inches.

2. Tolerances are as follows: Metal parts ±.005, Molded sections ±.05.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:37Z
Check the source to verify that this is the current version before use.

TABLE I. Tests.

Inspection	Require-ment Paragraph	Test Paragraph	Group I Qualification Tests	Group II Quality Conformance Test 100%	Group III Sample Testing Per 4.4.1
GROUP A (ALL SAMPLE UNITS) 1/					
Visual & Mechanical Inspection	3.1 & 3.4	4.5.2	X	X	
Soldering	3.4.18	4.5.2.1	X	X	
Continuity	3.5.1	4.5.3	X	X	
GROUP B					
Dielectric Withstanding Voltage	3.5.2	4.5.4	X		X
Gauging 1/	3.5.3	4.5.5	X		X
Pull Test	3.5.4	4.5.6.2	X		X
Bend Relief Flexibility	3.5.5	4.5.7	X		X
Durometer Hardness	3.5.10	4.5.12	X		X
GROUP C					
Low Temperature Flexibility	3.5.6	4.5.8	X		X
Durability 1/	3.5.7	4.5.9	X		X
Ozone Resistance 1/	3.5.8	4.5.10	X		
Jacket Elongation	3.5.9	4.5.11	X		
GROUP D 1/					
Salt Fog	3.6.2	4.6.2	X		
Vibration	3.6.4	4.6.4	X		

1/ Minimum tests for QPL retention (see 4.3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:37Z
Check the source to verify that this is the current version before use.

Amendment notations. The margins of this specification sheet are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Preparing activity:
Navy - AS
(Project 5995-2007-001)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:37Z
Check the source to verify that this is the current version before use.