METRIC

MIL-C-15306/2
28 JUNE 1993

MILITARY SPECIFICATION SHEET

CALL SIGNAL STATIONS
TA-974/WTC2, SIDE CRANK

This specification sheet is approved for use by all departments and agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-15306.

AMSC N/A FSC 5805

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:03Z
Check the source to verify that this is the current version before use.

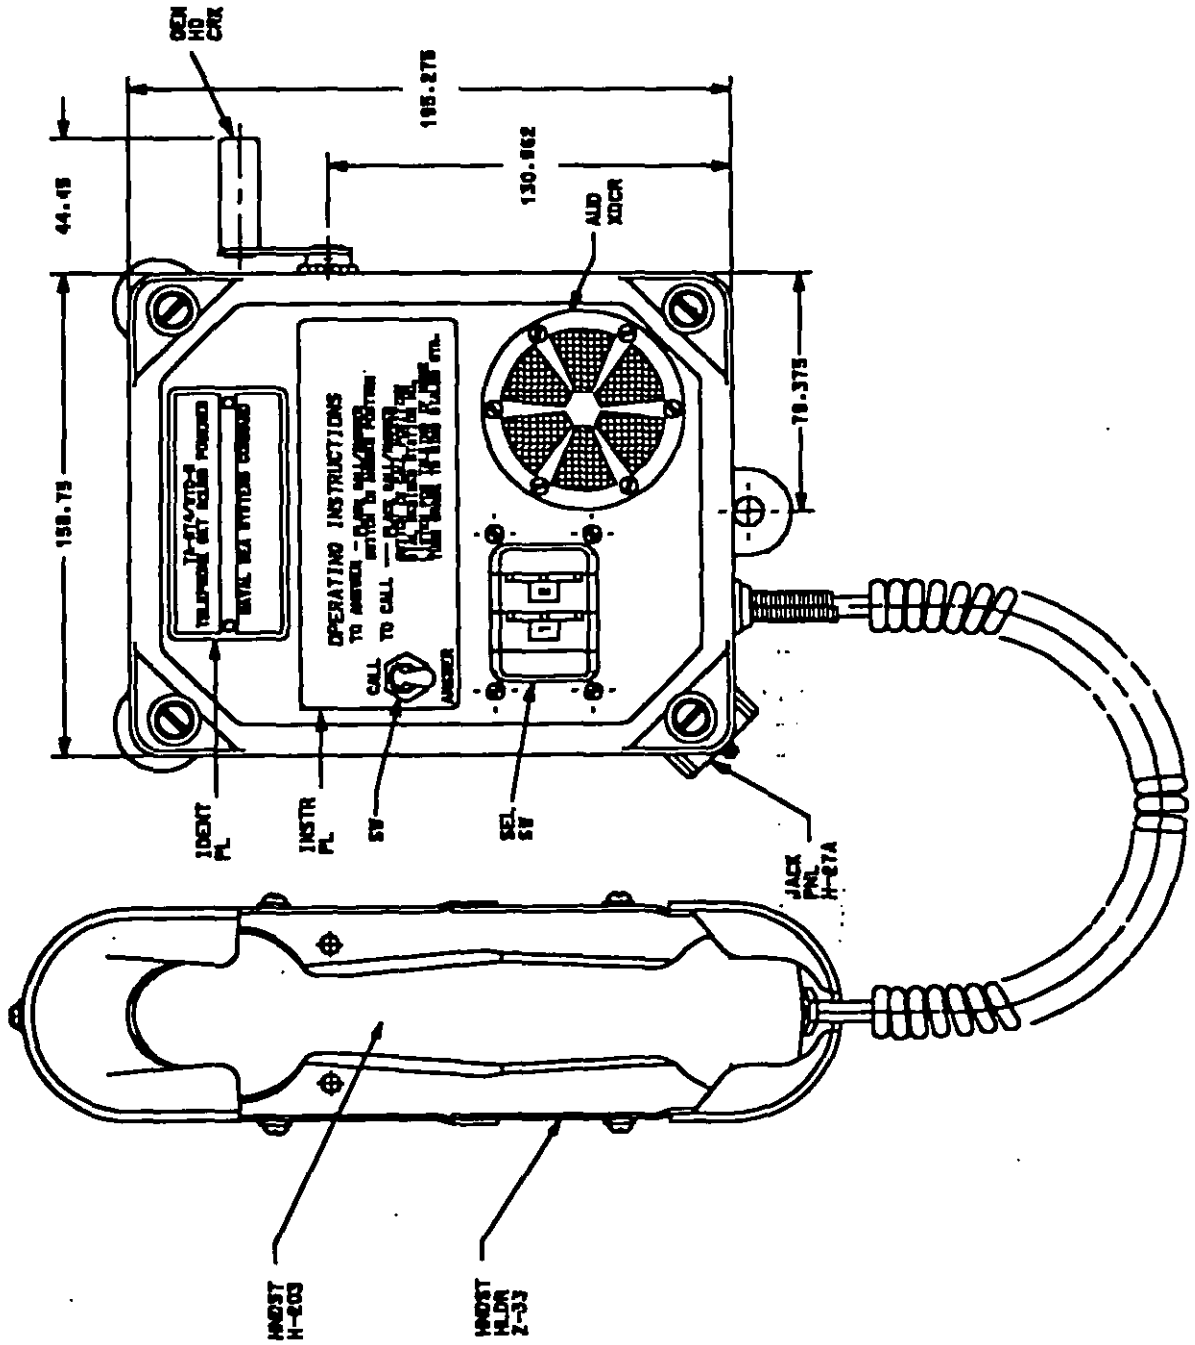


Figure 1. TA-974/WTC2 call station, front view.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:03Z
Check the source to verify that this is the current version before use.

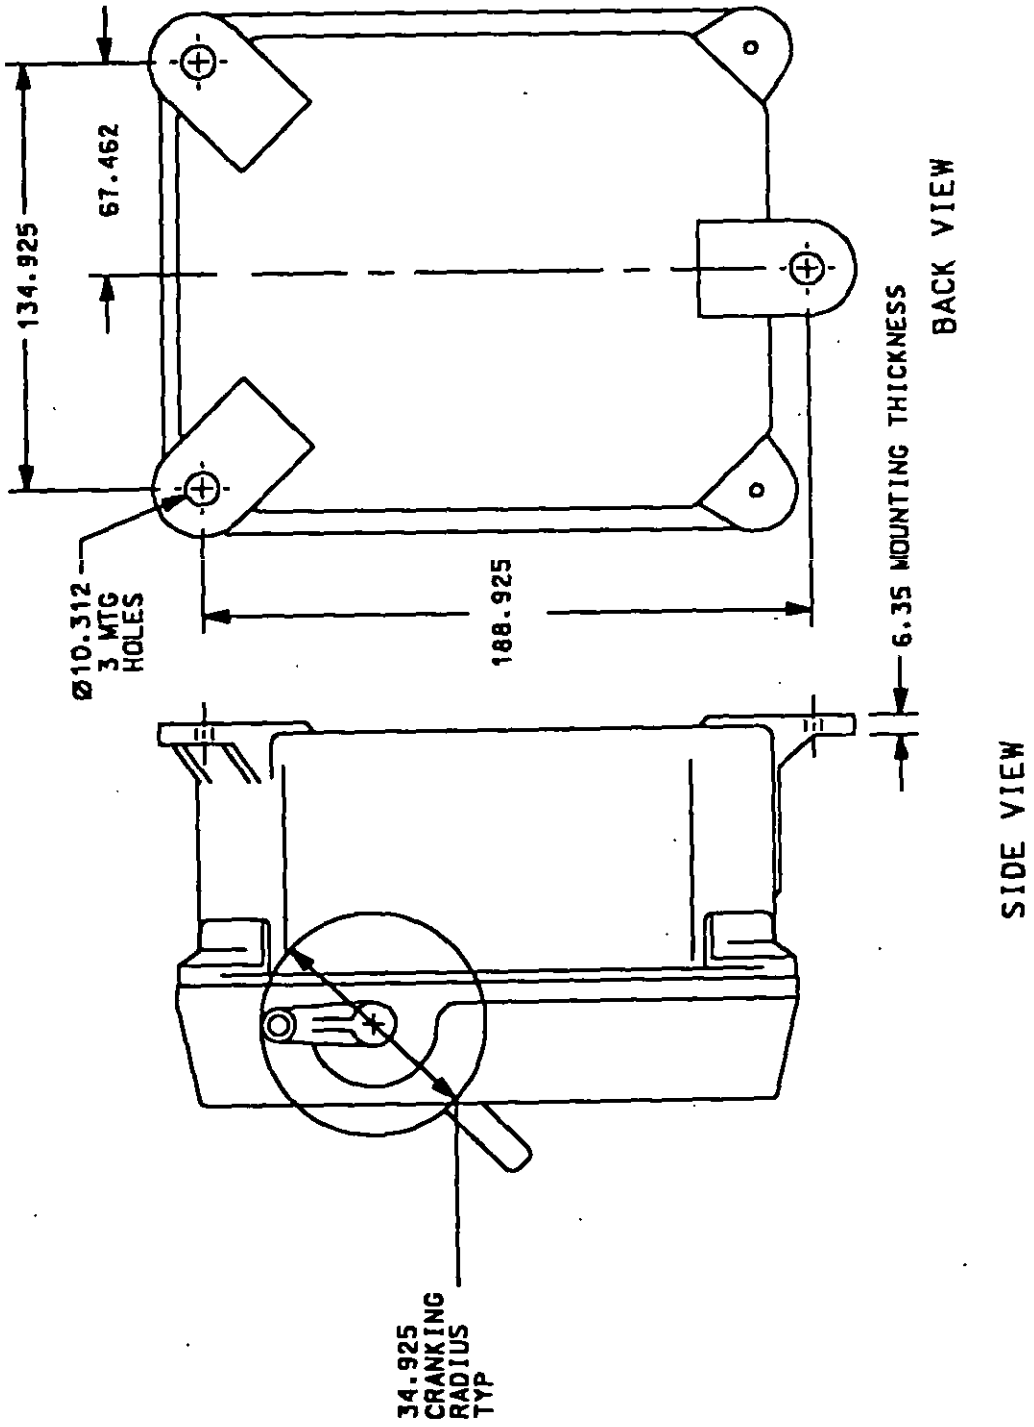


Figure 2. TA-974/WTC2 call station, side and back views.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:03Z
Check the source to verify that this is the current version before use.

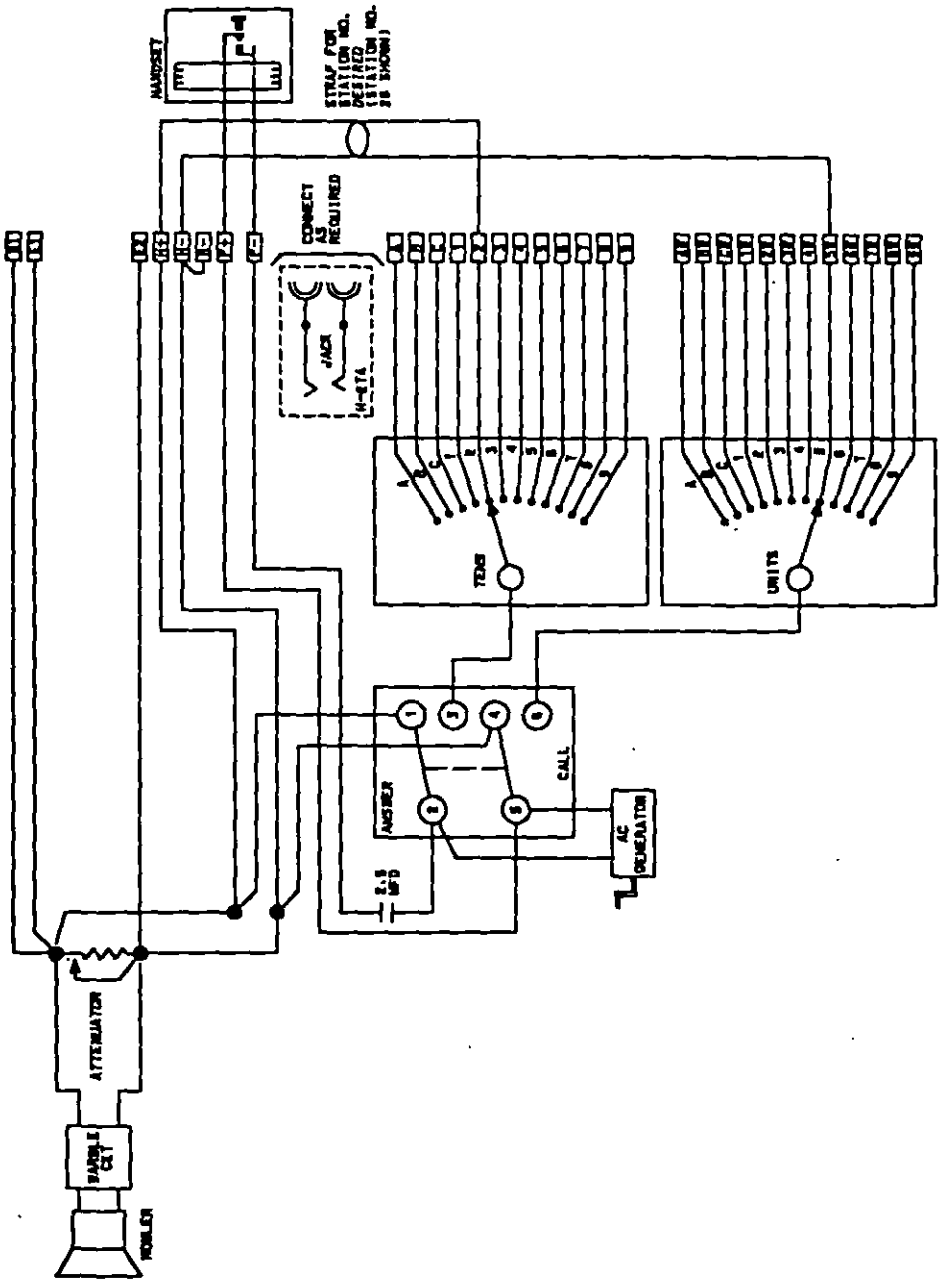


Figure 3. Typical wiring for TA-974/WTC2 call station.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:03Z
Check the source to verify that this is the current version before use.

TABLE I. Call signal station wiring connections.

System inter-connecting cable pair number	Terminal station terminal board connections		Station selector switch position	
	Black wire	White wire	Tens	Units
1	1	1W	1	1
2	2	2W	2	2
3	3	3W	3	3
4	4	4W	4	4
5	5	5W	5	5
6	6	6W	6	6
7	7	7W	7	7
8	8	8W	8	8
9	9	9W	9	9
10	0	0W	0	0
11	A	AW	A	A
12	B	BW	B	B

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:03Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction: See figures 1, 2, 3 and Table I.

1. All dimensions are in millimeters. Tolerances, unless otherwise specified shall be ± 0.05 millimeters.
2. All sharp edges or corners exposed to touch shall be rounded slightly.
4. All loose parts required for installation or operation shall be provided in a suitable cloth or plastic bag and packaged with the assembly.

Preparing activity:
Navy - SH
(Project 5805-0050-02)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:03Z
Check the source to verify that this is the current version before use.