INCH-POUND


MIL-S-15291/2A(SH)
22 July 1991
SUPERCEDING
MIL-S-15291/2(SH)
17 April 1981

MILITARY SPECIFICATION SHEET

SWITCHES, ROTARY, SNAP ACTION CLASS 1SR FRONT MOUNTED, SIDE CONNECTED

This specification is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-S-15291.

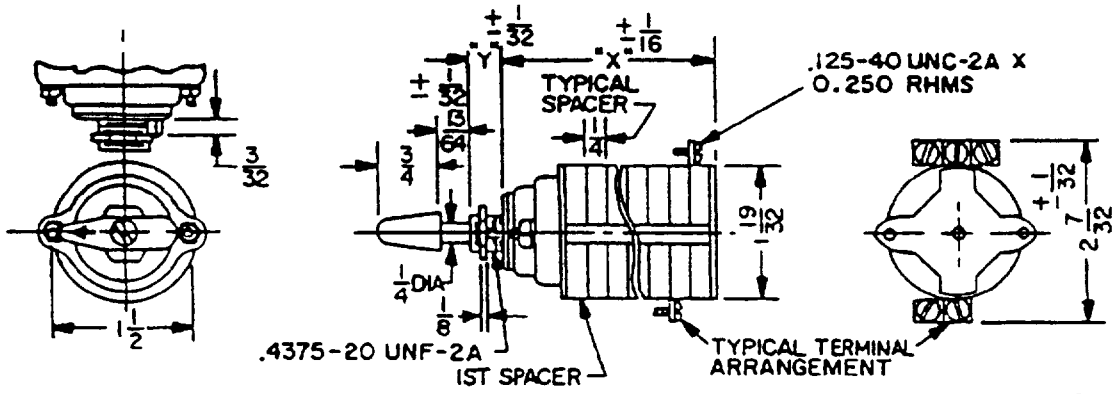


NOTES
1. Dimensions are in inches
2. Unless otherwise specified, tolerance is plus or minus 0.015

FIGURE 1. *1SR switch, single-hole mount (non-turn pin)*

AMSC N/A FSC 5930


DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:58Z
Check the source to verify that this is the current version before use.

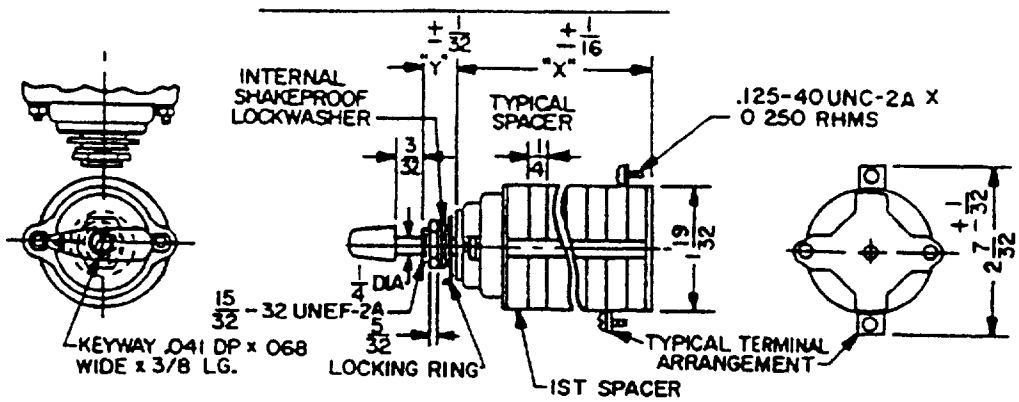


SH11823

FIGURE 2. *Class 1SR switch, single-hole mount (non-turn lockang pin).*

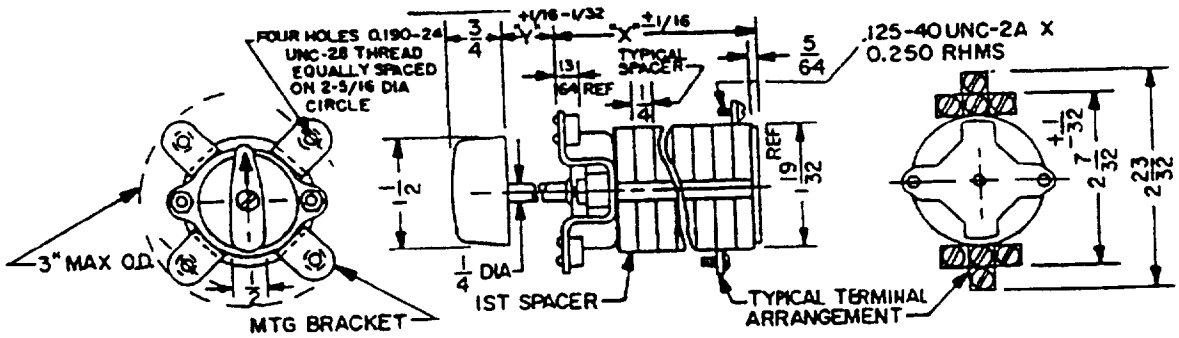

SH11824


FIGURE 3 *Class 1SR switch, 4-hole mount.*

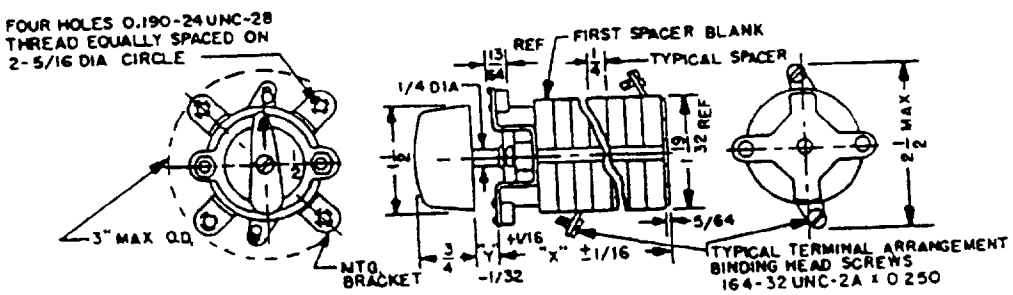

SH11825

FIGURE 4 *Class 1SR switch, 4-hole mount*

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:58Z
Check the source to verify that this is the current version before use.

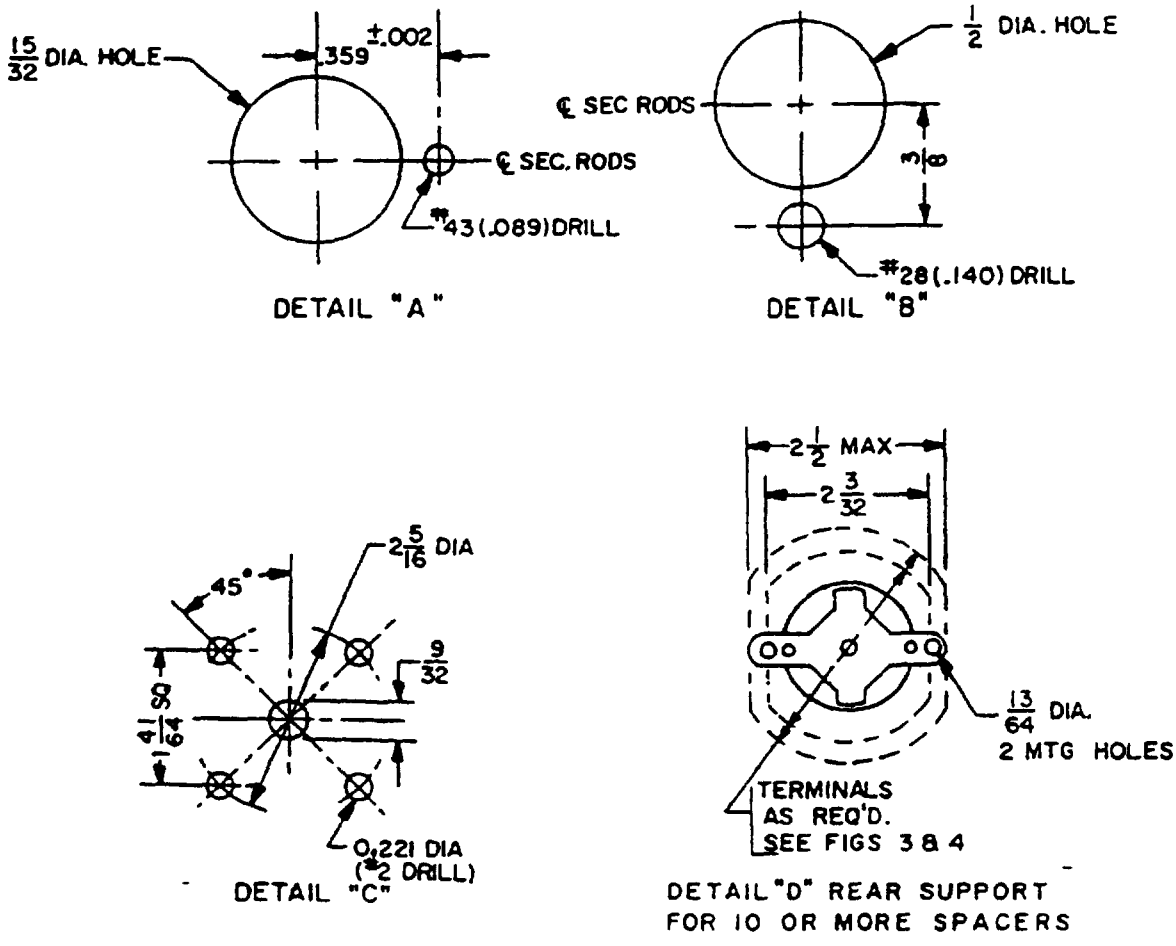

SH11826

FIGURE 5. Mounting dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:58Z
Check the source to verify that this is the current version before use.

TABLE I. *Type and switching characteristics.*

MIL-S-15291/2 Dash No Type designation	Detail ref	Dim "X"	Dim "Y"	Handle or shaft position	Circuit and spacer configuration rotor positions, spacer locations, terminal marking and locations. No 1	No. 2	No. 3	No. 4	No 5	No 6	No 7	No. 8	No. 9	Notes
-001	Figs 3,5C	1/4	3/8	OFF ON ON OFF										
ISR1A2	Torque in-lbs 4													
-002	Figs 4, 5C	1 5/16	7/16	OFF ON ON OFF										
	4													
-003	Figs 3, 5C	1 1/2	3/8	OFF ON ON OFF										
ISR2A2	4													
-004	Figs 4, 5C	1 9/16	7/16	OFF ON ON OFF										
	4													
-005	Figs 3, 5C	1 3/4	3/8	OFF ON ON OFF										
ISR3A2	4													
-006	Figs 4, 5C	1 13/16	7/16	OFF ON ON OFF										
	4													
-007	Figs 3, 5C	2	3/8	OFF ON ON OFF										
ISR4A2	4													
-008	Figs 4, 5C	2 1/16	7/16	OFF ON ON OFF										
	4													
-009	Figs 3, 5C	2 1/4	3/8	OFF ON ON OFF										
	4													
-010	Figs 4, 5C	2 5/16	7/16	OFF ON ON OFF										
	4													










































Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:58Z
Check the source to verify that this is the current version before use.

TABLE I *Type and switching characteristics -- Continued*

MIL-S-15291/2 Dash No Type designation	Detail ref	Dim "X"	Dim "Y"	Handle or shaft position	Circuit and spacer configuration rotor position, spacer locations, terminal marking and locations No. 1	No. 2	No. 3	No. 4	No. 5	No. 6	No. 7	No. 8	No. 9	No. 10	No. 11	No. 12	No. 13	Notes
-011	Figs 3, 5C	2 1/2	3/8	OFF ON														
ISR6A2	4																	
-012	Figs 4, 5C	2 9/16	7/16	OFF ON														
	4																	
-013	Figs 3, 5C	2 3/4	3/8	OFF ON														
	4																	
-014	Figs 4, 5C	2 13/16	7/16	OFF ON														
	4																	
-015	Figs 3, 5C	3	3/8	OFF ON														
ISR8A2	4																	
-016	Figs 4, 5C	3 1/16	7/16	OFF ON														
	4																	
-017	Figs 3, 5C	3 3/8	3/8	OFF ON														
ISR9A2	8																	
-018	Figs 4, 5C	3 7/16	7/16	OFF ON														
	8																	
-019	Figs 3, 5C	3 5/8	3/8	OFF ON														
	8																	
-020	Figs 4, 5C	3 11/16	7/16	OFF ON														
	8																	

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:58Z
Check the source to verify that this is the current version before use.

TABLE I. Type and switching characteristics – Continued

MIL-S-15291/2 Dash No Type designation	Detail ref Torque in-lbs	Dim "X" Dim "Y"	Handle or shaft position	Circuit and spacer configuration rotor position spacer locations, terminal marking and locations No 1	No 2	No 3	No 4	No 5	No 6	No 7	No 8	No 9	No 10	No 11	No 12	No 13	Notes
-021	Figs 3, 5C	1 1/2															
	4	3/8															
-022	Figs 4, 5C	1 9/16															
	4	7/16															
-023 ISR2B2	Figs 3, 5C	2															
	4	3/8															
-024	Figs 4, 5C	2 1/16															
	4	7/16															
-025 ISR3B2	Figs 3, 5C	2 1/2															
	4	3/8															
-026	Figs 4, 5C	2 9/16															
	4	7/16															
-027 ISR4B2	Figs 3, 5C	3															
	4	3/8															
-028	Figs 4, 5C	3 1/16															
	4	7/16															
-029	Figs 3, 5C	3 1/2															
	4	3/8															
-030	Figs 4, 5C	3 7/16															
	4	7/16															

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:58Z
Check the source to verify that this is the current version before use.

TABLE I Type and switching characteristics – Continued.

MIL-S-15291/2 Dash No Type designation	Detail ref / Torque in-lbs	Dim "X" / Dim "Y"	Handle or shaft position	Circuit and spacer configuration rotor position, spacer locations, terminal marking and locations: No. 1	No. 2	No. 3	No. 4	No. 5	No. 6	No. 7	No. 8	No. 9	No. 10	No. 11	No. 12	No. 13	Notes
-031	Figs 3, 5C	4	OFF / ON 1 / ON 2 / OFF		1	2	4	5 6	7	8 9	10 11	12	13	14 15	16 17	18	
ISR6B2	4	3/8				3											
-032	Figs 4, 5C	4 1/16	OFF / ON 1 / ON 2 / OFF		1	2	4	5 6	7	8 9	10	12	13	14 15	16	17 18	
	4	7/16				3											
-033	Figs 3, 5C	1 1/4	ON 1 / ON 2 / ON 1		1 2 4 3												1
ISR1C2	4	3/8															
-034	Figs 3, 5C	1 3/4	ON 1 / ON 2 / ON 1		1 2 4 3		5 6 8 7										1
ISR2C2	4	3/8															
-035	Figs 3, 5C	2 1/4	ON 1 / ON 2 / ON 1		1 2 4 3		5 6 8 7		9 10 12 11								1
ISR3C2	4	3/8															
-036	Figs 3, 5C	2 3/4	ON 1 / ON 2 / ON 1		1 2 4 3		5 6 8 7		9 10 12 11		13 14 16 15						1
ISR4C2	4	3/8															
-037	Figs 3, 5C	3 1/4	ON 1 / ON 2 / ON 1		1 2 4 3		5 6 8 7		9 10 12 11		13 14 16 15		17 18 20 19				1
	4	3/8															
- 38	Figs 3, 5C	3 3/4			1 2 4 3		5 6 8 7		9 10 12 11		13 14 16 15		17 18 20 19		21 22 24 23		1
ISR6C2	4	3/8															

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:58Z
Check the source to verify that this is the current version before use.

TABLE I. Type and switching characteristics – Continued.

M15291/2 Dash No Type designation	Detail ref Torque in-lbs	Dim "X" Dim "Y"	Handle or shaft position	Circuit and spacer configuration rotor position, spacer locations, terminal marking and locations No 1	No 2	No 3	No 4	No 5	No. 6	No 7	No 8	No. 9	No.10	No 11	No 12	No 13	Notes
-039 ISR1E2	Figs 3, 5C 4	1 1/2 3/8	OFF ON 1 ON 2 ON 3		1 2 3 4												
-040	Figs 4, 5C 4	1 9/16 7/16	OFF ON 1 ON 2 ON 3		1 2 3 4												
-041 ISR2E2	Figs 3, 5C 4	2 3/8	OFF ON 1 ON 2 ON 3		1 2 3 4		5 6 7 8										
-042	Figs 4, 5C 4	2 1/16 3/8	OFF ON 1 ON 2 ON 3		1 2 3 4		5 6 7 8										
-043	Figs 3, 5C 4	2 1/2 3/8	OFF ON 1 ON 2 ON 3		1 2 3 4		5 6 7 8		9	10 11 12							
-044	Figs 4, 5C 4	2 9/16 7/16	OFF ON 1 ON 2 ON 3		1 2 3 4		5 6 7 8		9	10 11 12							
-045	Figs 3, 5C 4	3 3/8	OFF ON 1 ON 2 ON 3		1 2 3 4		5 6 7 8		9	10 11 12	13	14 15 16					
-046	Figs 4, 5C 4	3 1/16 7/16	OFF ON 1 ON 2 ON 3		1 2 3 4		5 6 7 8		9	10 11 12	13	14 15 16					
-047	Figs 4, 5C 4	3 9/16 7/16	OFF ON 1 ON 2 ON 3		1 2 3 4		5 6 7 8		9	10 11 12	13	14 15 16	17	18 19 20			
-048	Figs 4, 5C 4	4 1/16 7/16	OFF ON 1 ON 2 ON 3		1 2 3 4		5 6 7 8		9	10 11 12	13	14 15 16	17	18 19 20	21	22 23 24	

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:58Z
Check the source to verify that this is the current version before use.

TABLE I. Type and switching characteristics – Continued.

MIL-S-15291/2 Dash No Type designation	Detail ref Torque in-lbs	Dim "X" Dim "Y"	Handle or shaft position	Circuit and spacer configuration rotor position, spacer locations, terminal marking and locations No 1	No 2	No 3	No 4	No 5	No 6	No 7	No 8	No. 9	Notes
-049	Figs 3, 5C	1 1/2	OFF ON 1 ON 1&2										-2
		3/8											
-050	Figs 4, 5C	1 9/16	OFF ON 1 ON 1&2										-3
		7/16											
-051	Figs 3, 5C	2	OFF ON 1 ON 1&2										-2
		3/8											
ISR4F2													
-052	Figs 4, 5C	2 1/16	OFF ON 1 ON 1&2										-3
		7/16											
-053	Figs 3, 5C	2 1/2	OFF ON 1 ON 1&2										-2
		3/8											
ISR6F2													
-054	Figs 4, 5C	2 9/16	OFF ON 1 ON 1&2										-3
		7/16											
-055	Figs 3, 5C	1 1/2	ON 1 ON 2 ON 3										
	4	3/8											
-056	Figs 4, 5C	1 9/16	ON 1 ON 2 ON 3										
	4	7/16											
-057	Figs 3, 5C	2	ON 1 ON 2 ON 3										
	4	3/8											
-058	Figs 4, 5C	2 1/16	ON 1 ON 2 ON 3										
	4	7/16											

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:58Z
Check the source to verify that this is the current version before use.

TABLE I Type and switching characteristics – Continued.

MIL-S-15291/2 Dash No Type designation	Detail ref / Torque in-lbs	Dim "X" / Dim "Y"	Handle or shaft position	Circuit and spacer configuration rotor position, spacer locations, terminal marking and locations: No 1	No 2	No 3	No 4	No 5	No 6	No 7	No 8	No 9	No 10	No 11	No 12	No 13	Notes
-059	Figs 3, 5C	2 1/2	ON 1 / ON 2 / ON 3 / ON 4														
	4	3/8															
-060	Figs 4, 5C	2 7/16	ON 1 / ON 2 / ON 3 / ON 4														
	4	7/16															
-061	Figs 3, 5C	3	ON 1 / ON 2 / ON 3 / ON 4														
	4	3/8															
-062	Figs 4, 5C	3 1/16	ON 1 / ON 2 / ON 3 / ON 4														
	4	7/16															
-063	Figs 4, 5C		ON 1 / ON 2 / ON 3 / ON 4														
		7/16															
-064	Figs 4, 5C		ON 1 / ON 2 / ON 3 / ON 4														
		7/16															
-065	Figs 4, 5C	1 5/16	OFF / ON 1 / ON 2														
	4	7/16															
-066	Figs 4, 5C	1 9/16	OFF / ON 1 / ON 2														
	4	7/16															
-067	Figs 4, 5C	1 13/16	OFF / ON 1 / ON 2														
	4	7/16															
-068	Figs 4, 5C	2 1/16	OFF / ON 1 / ON 2														
	4	7/16															

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:58Z
Check the source to verify that this is the current version before use.

TABLE I Type and switching characteristics – Continued.

MIL-S-15291/2 DASH No Type designation	Detail ref Torque in-lbs	Dim "X" Dim "Y"	Handle or shaft position	Circuit and spacer configuration rotor position spacer locations, terminal marking and locations. No 1	No. 2	No 3	No 4	No 5	No 6	No 7	No 8	No 9	Notes
-069	Figs 4, 5C	2 5/16	OFF										
	4	7/16											
-070	Figs 4, 5C	2 7/16	OFF										
	4	7/16											
-071	Figs 4, 5C	2 15/16	OFF										
	8	7/16											
-072	Figs 4, 5C	3 3/16	OFF										
	8	7/16											
-073	Figs 4, 5C	1 5/16	ON1										
	4	7/16											
-074	Figs 4, 5C	1 7/16	ON1										
	4	7/16											
-075	Figs 4, 5C	1 13/16	ON1										
	4	7/16											
-076	Figs 4, 5C	2 1/16	ON1										
	4	7/16											
-077	Figs 4, 5C	2 5/16	ON1										
	4	7/16											
-078	Figs 4, 5C	2 9/16	ON1										
	4	7/16											

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:58Z
Check the source to verify that this is the current version before use.

TABLE I *Type and switching characteristics – Continued*

MIL-S-15291/2 Dash No Type designation	Detail ref / Torque in-lbs	Dim "X" / Dim "Y"	Handle or shaft position	Circuit and spacer configuration rotor position spacer locations, terminal marking and locations No 1	No 2	No 3	No 4	No 5	No 6	No 7	No 8	No 9	Notes
-079	Figs 4, 5C	$2\frac{15}{16}$	ON 1 / ON 2 / ON 2 / ON 1		1 3 2	4 5 6	7 9 8	10 11 12	13 14 15	16 17 18	19 21 20		
	8	$\frac{7}{16}$											
-080	Figs 4, 5C	$3\frac{3}{16}$	ON 1 / ON 2 / ON 2 / ON 1		1 3 2	4 5 6	7 9 8	10 11 12	13 14 15	16 17 18	19 21 20	22 23 24	
	8	$\frac{7}{16}$											
-081 ISRS52	Figs 1, 5A	2	OFF – 1 & 2		9 10	15 16	7 8	2 4					
	4	$\frac{13}{32}$											
-082 ISRS52A	Figs 2, 5B	2	OFF – 1 & 2		12 11	13 14	6 5	3 1					
	4	$\frac{3}{8}$											

[1]External jumpers not furnished Applies to all "C" switches
[2]Break before make See requirements and figure 6
[3]Make before break

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:58Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Applicable specification:	MIL-S-15291
Dimensions and mounting:	See figures 1 through 8
Electrical circuits:	See table I
Angle of throw:	90 degrees
Switching action:	Snap action, reciprocating
Electrical and endurance ratings:	See table II
Stop strength (applicable to switches with stops):	30 inch-pounds
Vibration:	50 Hz, MIL-STD-167-1
Shock:	High impact, MIL-S-901
Insulation (spacers and decks)	Glass alkyd, MAI-60 (or MAI-30) in accordance with MIL-M-14
Overload.	600 percent of ac rating, 50 make and break operations
Contact resistance.	0.02 ohms maximum
Dielectric withstanding voltage:	1,250 Vrms
Insulation resistance:	200 megohms minimum
Temperature rise:	50 °C maximum
Contact material:	Rotor, phosphor bronze – Stationary contact, copper
Mounting screws.	.190-24UNC-2A (4) length and headstyle to suit application, screws not furnished
Handle:	M15291/1-100

TABLE II. *Electrical and endurance ratings.*

Tests	Current (amperes)	Voltage (volts)	Electrical operations (number of operations)	Test rate (operations per minute)	De-energized operations (number of operations)
Alternating current (rms)	10	125	30,000	30	20,000
Direct current	10	120	20,000	15	-

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:58Z
Check the source to verify that this is the current version before use.

Terminal marking: Terminal markings shown in table I locate terminals as viewed from the front of the switch (handle end). Markings shall be stamped in rear surfaces of terminals, clear of the screw heads.

Make before break switching characteristic F: Operation of a characteristic F, make before break switch from the "1 and 2" position to either the "1" position or the "2" position shall not interrupt continuity through the ultimate position (1 or 2).

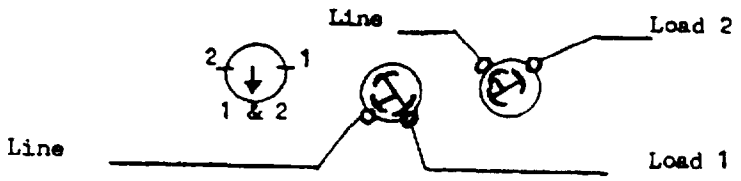


FIGURE 6. *Switching characteristic F*

GENERAL INFORMATION:

Switches not covered by specification sheets: Switches which are fabricated from standard parts, as used in qualified switches, but which do not comply with switches detailed herein with respect to circuit characteristics, switching action, mounting arrangement, and handle details may be acquired under this specification from contractors having qualification approval under this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:58Z
Check the source to verify that this is the current version before use.

Extended ratings: Switches detailed herein have been tested and found satisfactory at the extended ratings listed in table III. Reduced life expectancy must be anticipated for switches used at these increased voltage or current levels. Tests under the conditions of table III are not required for qualification acceptance and they are not repeated routinely as for maintenance of qualification. Supplemental evaluations and tests applicable to particular circuit requirements are recommended.

Sealed mounting: Switches listed in table I as having four-point mounting (see figure 4), and "Y" dimension not less than 7/16 inch can be mounted with a kit (see figure 7), to effect a submersible seal (SBM15) between switch and mounting panel. Panel drilling must comply with figure 8. Kits not supplied unless specified (see 6.2 of MIL-S-15291).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:58Z
Check the source to verify that this is the current version before use.

TABLE III. *Extended ratings.*


Switching characteristics	AC - 60 or 400 Hz											
	125 volts				250 volts				500 volts			
	Resistive or lamp load		Inductive load 0 75 p f		Resistive or lamp load		Inductive load 0 75 p f.		Resistive or lamp load		Inductive load 0.75 p f	
	Amp.	Operations	Amp	Operations	Amp.	Operations	Amp.	Operations	Amp.	Operations	Amp.	Operations
All [1]	10	30,000	10	30,000	---	---	---	---	---	---	---	---
C, D, E, F, G	15	10,000	15	10,000	10	10,000	10	10,000	5	10,000	5	10,000
A, B [2]	15	10,000	15	10,000	10	10,000	10	10,000	5	10,000	5	10,000
A, B	15	10,000	15	10,000	15	10,000	15	10,000	10	10,000	10	10,000
	DC											
	120 volts				250 volts				350 volts			
	Resistive or lamp load		Inductive load 3		Resistive or lamp load		Inductive load 3		Resistive or lamp load		Inductive load 3	
	Amp.	Operations	Amp	Operations	Amp.	Operations	Amp.	Operations	Amp.	Operations	Amp.	Operations
C, D, E, F, G	10	10,000	10	10,000	5	10,000	5	10,000	2	10,000	2	10,000
C, D, E, F, G [2]	---	---	---	---	---	---	---	---	1	10,000	1	10,000
A, B [2]	10	10,000	10	10,000	5	10,000	5	10,000	2	10,000	2	10,000
A, B	10	20,000	15	10,000	---	---	---	---	---	---	---	---

[1] Switching characteristic F is not rated for 450 volts in class 1SR

[2] Single pole break – all other ratings are based on breaking both sides of the line in accordance with figures 1 and 2 of MIL-S-15291

[3] 0 24 henry for inductive circuit


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:58Z
Check the source to verify that this is the current version before use.

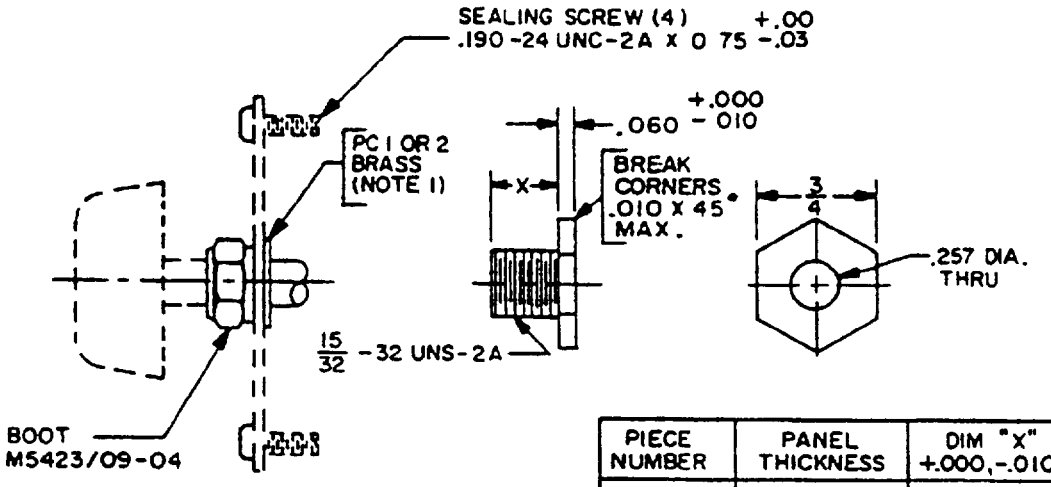

PIECE NUMBER	PANEL THICKNESS	DIM "X" +.000,-.010
1	1/16	5/32
2	1/8	7/32

NOTE
1 Finish shall be zinc and dichromate, ASTM B 633

FIGURE 7. *Kit for panel seal mounting.*

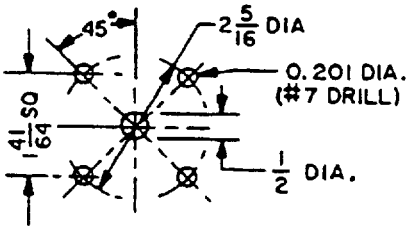

NOTE.
1. Do not chamfer mounting holes. Breaking 1/64 maximum permissible

FIGURE 8. *Panel drilling for mounting kit.*

APPLICATION AND ACQUISITION GUIDE: PIN and type designation cross reference shall be as shown in table IV.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:58Z
Check the source to verify that this is the current version before use.

TABLE IV *Application and acquisition guide*

M15291/2 dash No.	Type designation	For new or existing design	For replacement	Circuit configuration
-001	1SR1A2		X[1]	A (off-on-off-on)
-002	-	X		A (off-on-off-on)
-003	1SR2A2		X	A (off-on-off-on)
-004	-	X		A (off-on-off-on)
-005	1SR3A2		X	A (off-on-off-on)
-006	-	X		A (off-on-off-on)
-007	1SR4A2		X	A (off-on-off-on)
-008	-	X		A (off-on-off-on)
-009	-		X	A (off-on-off-on)
-010	-	X		A (off-on-off-on)
-011	1SR6A2		X	A (off-on-off-on)
-012	-	X		A (off-on-off-on)
-013	-		X	A (off-on-off-on)
-014	-	X		A (off-on-off-on)
-015	1SR8A2		X	A (off-on-off-on)
-016	-	X		A (off-on-off-on)
-017	1SR9A2		X	A (off-on-off-on)
-018	-	X		A (off-on-off-on)
-019	-		X	A (off-on-off-on)
-020	-	X		A (off-on-off-on)
-021	1SR1B2		X[1]	B (off-on 1-off-on 2)
-022	-	X		B (off-on 1-off-on 2)
-023	1SR2B2		X	B (off-on 1-off-on 2)
-024	-	X		B (off-on 1-off-on 2)
-025	1SR3B2		X	B (off-on 1-off-on 2)
-026	-	X		B (off-on 1-off-on 2)
-027	1SR4B2		X	B (off-on 1-off-on 2)
-028	-	X		B (off-on 1-off-on 2)
-029	-		X	B (off-on 1-off-on 2)
-030	-	X		B (off-on 1-off-on 2)
-031	1SR6B2		X	B (off-on 1-off-on 2)
-032	-	X		B (off-on 1-off-on 2)
-033	1SR1C2	X		C (on 1-on 2-on 1-on 2)
-034	1SR2C2	X		C (on 1-on 2-on 1-on 2)
-035	1SR3C2	X		C (on 1-on 2-on 1-on 2)
-036	1SR4C2	X		C (on 1-on 2-on 1-on 2)
-037	-	X		C (on 1-on 2-on 1-on 2)
-038	1SR6C2	X		C (on 1-on 2-on 1-on 2)
-039	1SR1E2		X[1]	E (off-on 1-on 2-on 3)
-040	-	X		E (off-on 1-on 2-on 3)
-041	1SR2E2		X	E (off-on 1-on 2-on 3)
-042	-	X		E (off-on 1-on 2-on 3)
-043	-		X	E (off-on 1-on 2-on 3)
-044	-	X		E (off-on 1-on 2-on 3)
-045	-		X	E (off-on 1-on 2-on 3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:58Z
Check the source to verify that this is the current version before use.

TABLE IV. *Application and acquisition guide – Continued*

M15291/2 dash No.	Type designation	For new or existing design	For replacement	Circuit configuration
-046	-	X		E (off-on 1-on 2-on 3)
-047	-	X		E (off-on 1-on 2-on 3)
-048	-	X		E (off-on 1-on 2-on 3)
-049	-		X[1]	F (off-on 1-on 1 & 2-on 2)
-050	-	X		F (off-on 1-on 1 & 2-on 2)
-051	1SR4F2		X	F (off-on 1-on 1 & 2-on 2)
-052	-	X		F (off-on 1-on 1 & 2-on 2)
-053	1SR6F2		X	F (off-on 1-on 1 & 2-on 2)
-054	-	X		F (off-on 1-on 1 & 2-on 2)
-055	1SR1G2		X[1]	G (-on 1-on 2-on 3)
-056	-	X		G (-on 1-on 2-on 3)
-057	-		X	G (-on 1-on 2-on 3)
-058	-	X		G (-on 1-on 2-on 3)
-059	-		X	G (-on 1-on 2-on 3)
-060	-	X		G (-on 1-on 2-on 3)
-061	1SR4G2		X	G (-on 1-on 2-on 3)
-062	-	X		G (-on 1-on 2-on 3)
-063	-	X		G (-on 1-on 2-on 3)
-064	-	X		G (-on 1-on 2-on 3)
-065	-	X		H (on 1-off-on 2)
-066	-	X		H (on 1-off-on 2)
-067	-	X		H (on 1-off-on 2)
-068	-	X		H (on 1-off-on 2)
-069	-	X		H (on 1-off-on 2)
-070	-	X		H (on 1-off-on 2)
-071	-	X		H (on 1-off-on 2)
-072	-	X		H (on 1-off-on 2)
-073	-	X		J (on 1-on 2-on 1-on 2)
-074	-	X		J (on 1-on 2-on 1-on 2)
-075	-	X		J (on 1-on 2-on 1-on 2)
-076	-	X		J (on 1-on 2-on 1-on 2)
-077	-	X		J (on 1-on 2-on 1-on 2)
-078	-	X		J (on 1-on 2-on 1-on 2)
-079	-	X		J (on 1-on 2-on 1-on 2)
-080	-	X		J (on 1-on 2-on 1-on 2)
-081	1SR4S2	X		S (see table I)
-082	1SR5S2A	X		S (see table I)

[1]Switches having circuit configurations A, B, E, F, or G and designated "For replacement" should be superceded in new designs by the next higher dash number of the same configuration and number of poles

Revision letters are not used to denote changes due to the extensiveness of the changes.

Preparing activity.
Navy - SH
(Project 5930-N663-3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:58Z
Check the source to verify that this is the current version before use.