
INCH-POUND
MIL-DTL-15291/5D
21 August 2026
SUPERSEDING
MIL-DTL-15291/5C
21 January 2022

DETAIL SPECIFICATION SHEET

SWITCHES, ROTARY, SNAP ACTION CLASS 3SR FRONT MOUNTED, BACK CONNECTED

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the switch described herein shall consist of this specification and the latest issue of MIL-DTL-15291.

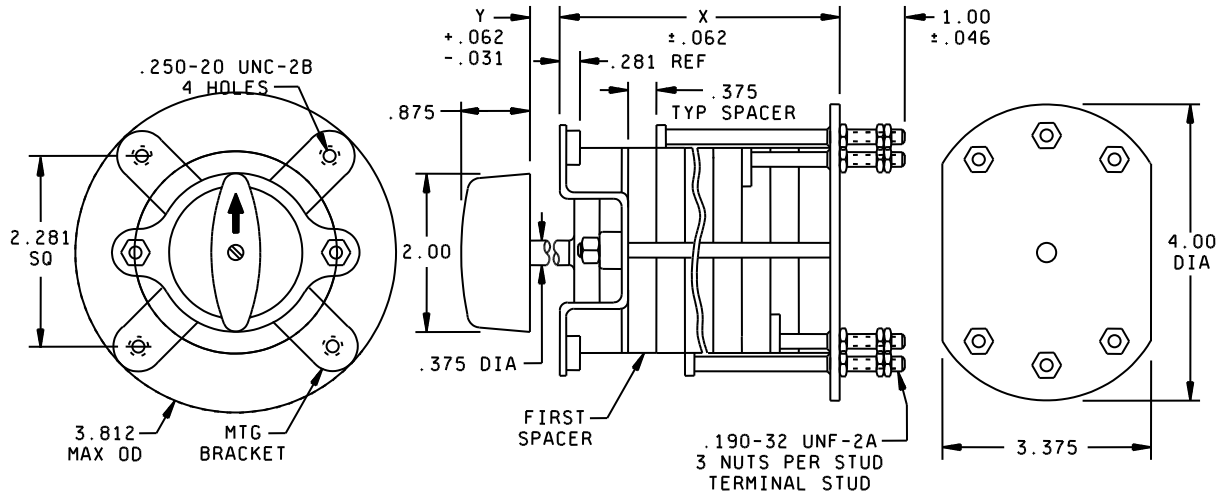

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ± 0.015.

FIGURE 1. Class 3SR switch (up to 6 studs).

AMSC N/A
DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

FSC 5930

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:59Z
Check the source to verify that this is the current version before use.


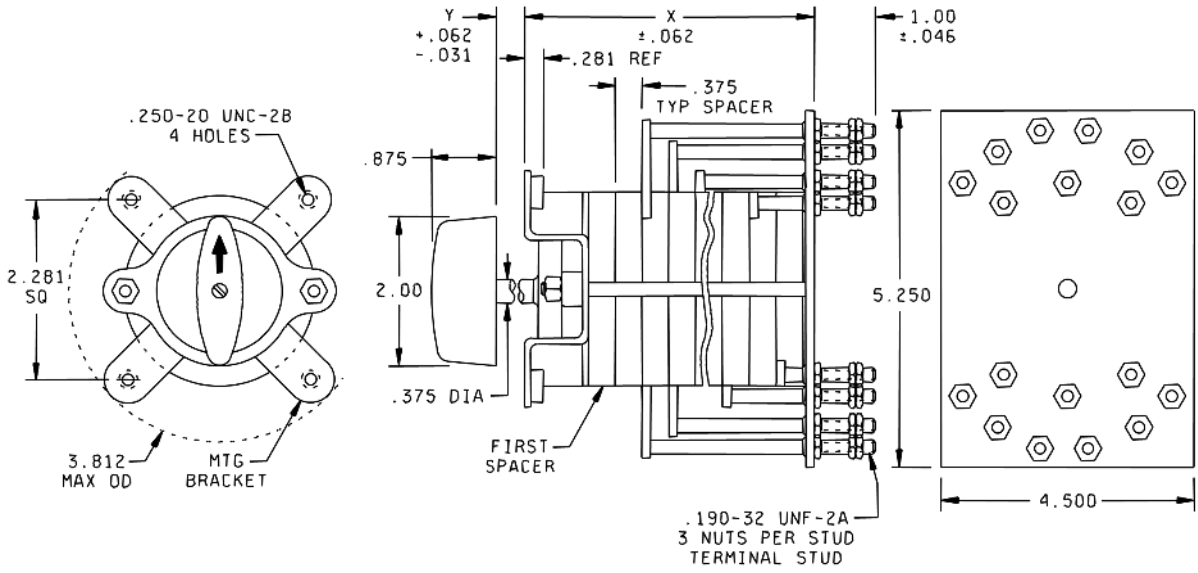


FIGURE 2. Class 3SR switch (up to 18 studs).


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:59Z
Check the source to verify that this is the current version before use.

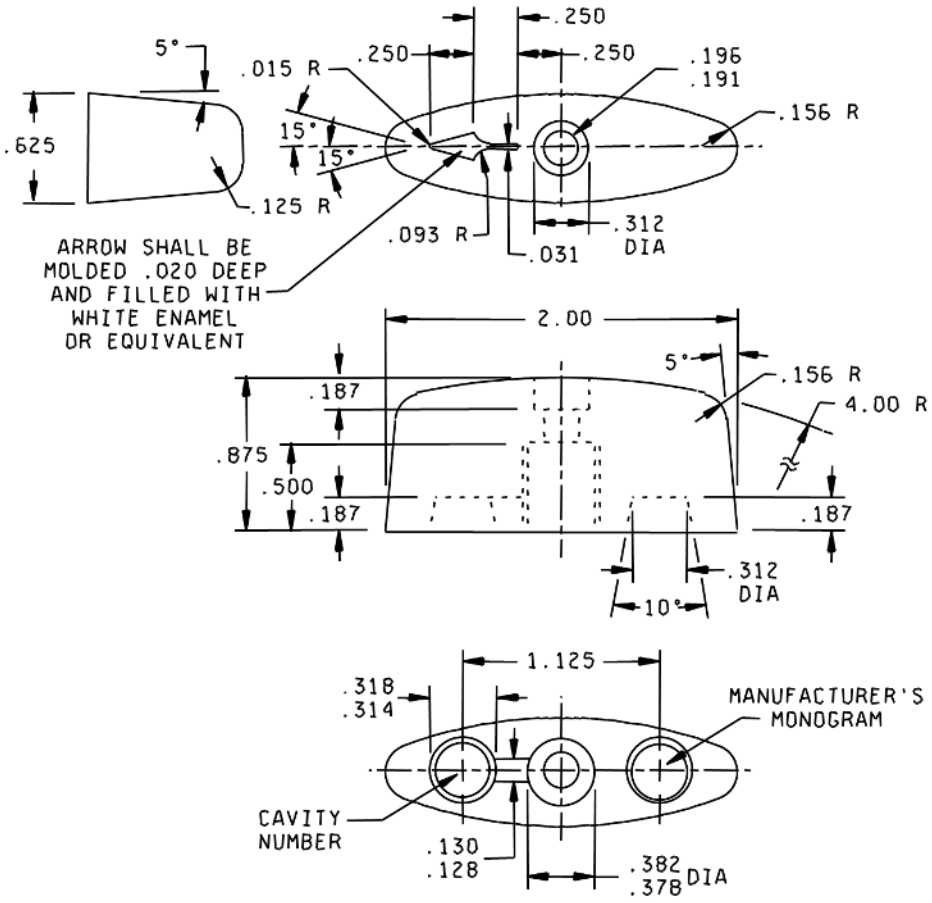

PIN M15291/5-100

FIGURE 3. Handle.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:59Z
Check the source to verify that this is the current version before use.

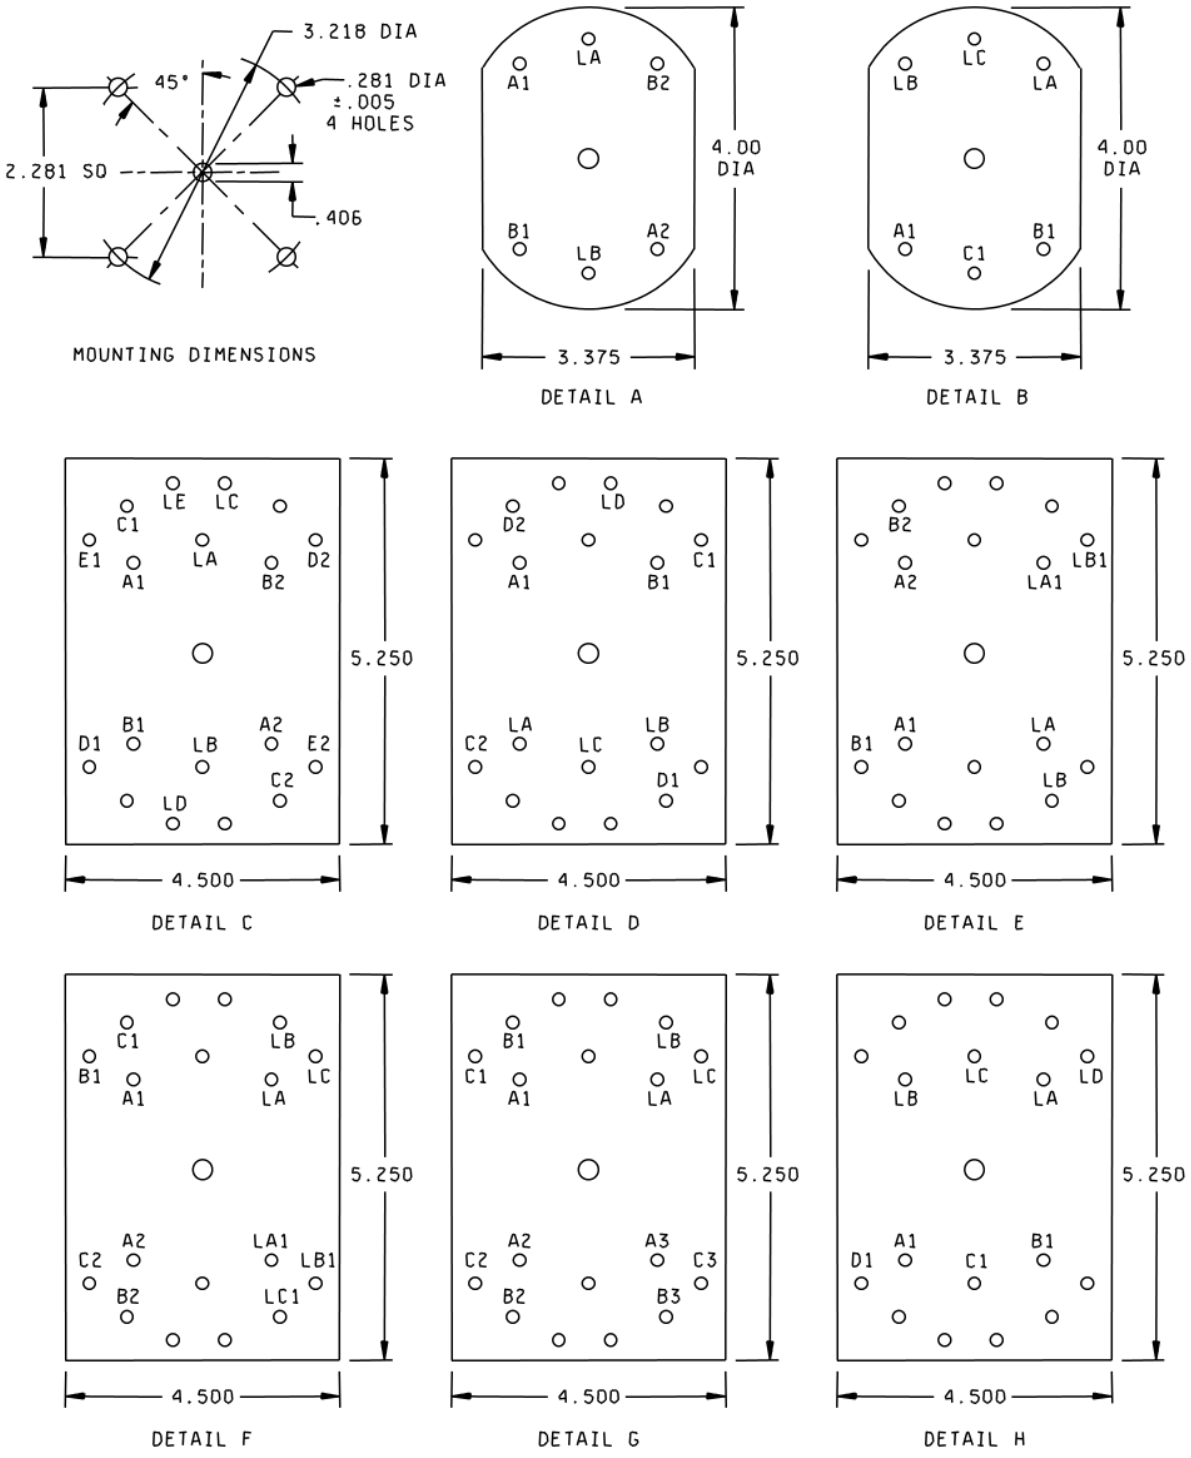

NOTE: Viewed from the rear of the switch.

FIGURE 4. Mounting dimensions and terminal stud locations

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:59Z
Check the source to verify that this is the current version before use.

M15291/5 DASH NO. TYPE DESIGNATION	DETAIL REF	DIM "X"	HANDLE OR SHAFT POSITION	CIRCUIT AND SPACER CONFIGURATIONS ROTOR POSITION, SPACER LOCATIONS, TERMINAL MARKING AND LOCATIONS											NOTES
	TORQUE IN-LBS	DIM "Y"		NO 1	NO 2	NO 3	NO 4	NO 5	NO 6	NO 7	NO 8	NO 9	NO 10	NO 11	
-001 3SR2A1	FIG 1 DETAIL B 9	2.375 .437	OFF ON		LB B1	LA A1									
-002 3SR3A1	FIG 1 DETAIL B 9	2.750 .457	OFF ON		LC C1	LB B1	LA A1								
-003 3SR4A1	FIG 2 DETAIL H 9	3.125 .457	OFF ON		LD D1	LC C1	LB B1	LA A1							
-004 3SR2C1	FIG 1 DETAIL A 9	3.125 .437	OFF ON 1 2		LB B1	B2 C1	LA A2	A1							
-005 3SR3B1	FIG 2 DETAIL C 9	3.875 .437	OFF ON 1 2		LC C2	C1 B2	B2 B1	LA LA	LA A2	A1					
-006 3SR3C1	FIG 2 DETAIL C 9	5.375 .437	OFF ON 1 2		LE E2	E1 D2	D2 D1	LA LD	LC C2	C1 B2	B2 B1	LB	LA A2	A1	
-007 3SR3E1	FIG 2 DETAIL G 9	3.875 .457	OFF ON 1 2 3		LC C3	C1 LB D1	LB B2 D2	LA B3 B2	LA A3 A2	A1 A2					
-008 3SR4F1	FIG 2 DETAIL E 9	3.125 .437	OFF ON 1&2		LB B1	LB1 B2	LA A1	LA1 A2							
-009 3SR6F1	FIG 2 DETAIL F 9	3.875 .437	OFF ON 1&2		LC1 C2	LC C1 LB1 B2	LB B1 LA1 A2	LA A1							
-010 3SR4S1	FIG 2 DETAIL D 9	3.875 .437	OFF ON		LD D2	LC C1 LB1 B2	LB B1 LA1 A2	LA A1							

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:59Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Applicable specification: MIL-DTL-15291.

Dimensions and mounting: See figures 1 through 4.

Switching characteristics: See table I.

Angle of throw: 90 degrees.

Switching action: Snap action, reciprocating.

Electrical and endurance ratings: See table II.

Stop strength (applicable to switches with stops): 100 inch-pounds.

Vibration: 50 Hz, MIL-STD-167-1.

Shock: High impact, MIL-DTL-901.

Overload: 600 percent of ac rating, 50 make and break operations.

Contact resistance: 0.01 ohms maximum.

Dielectric withstanding voltage: 2,000 V rms.

Insulation resistance: 200 megohms minimum.

Temperature rise: 50°C maximum.

Mounting screws: .250-20UNC-2A (4) length and head style to suit application. Screws not furnished.

TABLE II. Electrical and endurance ratings.

Tests	Current (amperes)	Voltage (volts)	Electrical operations (number of operations)	Test rate (operations per minute)	De-energized operations (number of operations)
Alternating current (rms)	30	500	20,000	30	10,000
Direct current	30	250	15,000	15	---

Terminal marking: Terminal markings shall be in accordance with details A through H, as specified in table I. Terminal markings in table I are as viewed from the front (handle end) of the switch.

Switches not covered by specification sheets: Switches which are fabricated from standard parts, as used in qualified switches, but which do not comply with switches detailed herein with respect to circuit characteristics, switching action, mounting arrangement, and handle details may be acquired under this specification from contractors having qualification approval under this specification.

Extended ratings: Switches detailed herein have been tested and found satisfactory at the extended rating listed in table III. Reduced life expectancy must be anticipated for switches used at these increased voltage or current levels. Tests under the conditions of table III are not required for qualification acceptance and they are not repeated routinely as for maintenance of qualification. Supplemental evaluations and tests applicable to particular circuit requirements are recommended.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:59Z
Check the source to verify that this is the current version before use.


TABLE III. Extended ratings

Switching characteristics	AC 60 or 400 Hz											
	125 volts				250 volts				500 volts			
	Resistive or lamp load		Inductive load 0.75 p.f.		Resistive or lamp load		Inductive load 0.75 p.f.		Resistive or lamp load		Inductive load 0.75 p.f.	
	Amp.	Operations	Amp.	Operations	Amp.	Operations	Amp.	Operations	Amp.	Operations	Amp.	Operations
All	30	20,000	30	20,000	30	20,000	30	20,000	30	20,000	30	20,000
E, F	40	6,000	40	6,000	--	--	--	--	--	--	--	--
A, B 1/	40	6,000	40	6,000	30	6,000	30	6,000	30	6,000	30	6,000
	DC											
	120 volts				250 volts				350 volts			
	Resistive or Lamp load		Inductive load[3]		Resistive or Lamp load		Inductive load[3]		Resistive or Lamp load		Inductive load[3]	
	Amp.	Operations	Amp.	Operations	Amp.	Operations	Amp.	Operations	Amp.	Operations	Amp.	Operations
All	30	13,000	25	6,000	15	13,000	--	--	--	--	--	--
A, B	30	15,000	25	6,000	25	6,000	25	6,000	15	6,000	15	6,000
A, B 3/	--	--	--	--	30	15,000	--	--	--	--	--	--

1/ Single pole break - all other ratings are based on breaking both sides of the line in accordance with figures 1 and 2 of MIL-DTL-15291.
2/ 0.08 henry for inductive current.
3/ Switch with special arc snuffers.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:59Z
Check the source to verify that this is the current version before use.

Sealed mounting: Switches listed in table I as having "Y" dimensions not less than 7/16 inch can be mounted with a kit, figure 5, to effect a submersible seal (SBM 15) between switch and mounting panel. Panel drilling must comply with figure 6. Kits not supplied unless specified (see 6.2 of MIL-DTL-15291).

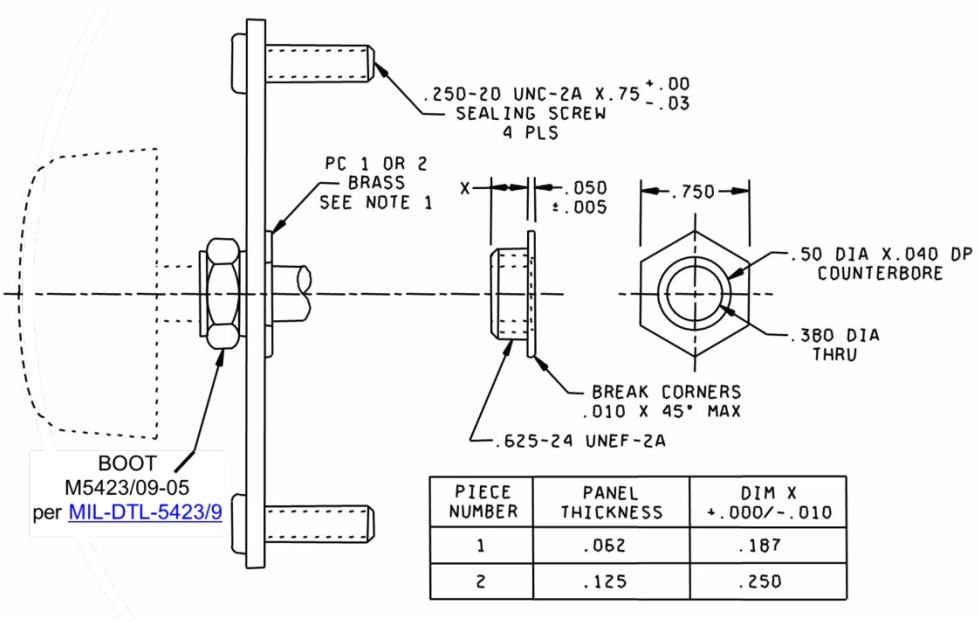


PIECE NUMBER	PANEL THICKNESS	DIM X +.000/-.010
1	.062	.187
2	.125	.250

NOTE: Finish shall be zinc and dichromate, ASTM-B633.

FIGURE 5. Kit for panel seal mounting.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:59Z
Check the source to verify that this is the current version before use.

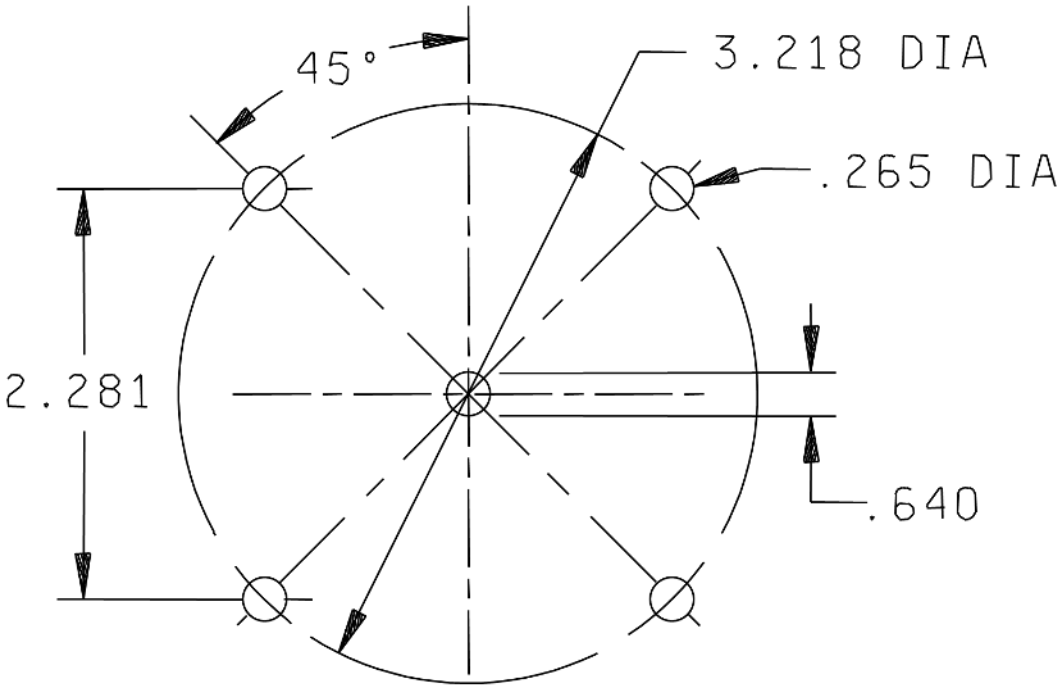

NOTE: Do not chamfer mounting holes. Breaking 1/64 maximum permissible.

FIGURE 6. Panel drilling for mounting kit.

APPLICATION AND ACQUISITION GUIDE: PIN and type designation cross reference shall be as shown on table IV.

TABLE IV. Application and acquisition guide.

M15291/5 dash no.	Type designation	For new or existing design	For replacement	Circuit configuration
-001	1SR2A1	X		A (off-on-off-on)
-002	1SR3A1	X		A (off-on-off-on)
-003	3SR4A1	X		A (off-on-off-on)
-004	3SR4A1	X		B (off-on 1-off-on 2)
-005	3SR3B1	X		B (off-on 1-off-on 2)
-006	---	X		B (off-on 1-off-on 2)
-007	3SR3E1	X		E (off-on 1-on 2-on 3)
-008	3SR4F1	X		F (off-on 1-on 1 and 2-on 2)
-009	3SR6F1	X		F (off-on 1-on 1 and 2-on 2)
-010	3SR4S1	X		S (see table I)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:59Z
Check the source to verify that this is the current version before use.

Referenced Documents:

- MIL-DTL-15291
- MIL-DTL-5423/9
- MIL-DTL-901
- MIL-STD-167-1
- ASTM-B633

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Custodians:
Navy - SH
DLA - CC

Preparing activity:
DLA - CC

(Project 5930-2026-058)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/ .

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:59Z
Check the source to verify that this is the current version before use.