
INCH-POUND
MIL-DTL-15291/6E
15 September 2025
SUPERSEDING
MIL-DTL-15291/6D
21 January 2022

DETAIL SPECIFICATION SHEET

# SWITCHES, ROTARY, SNAP ACTION CLASS 3SR FRONT MOUNTED, SIDE CONNECTED

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the switch described herein shall consist of this specification and the latest issue of MIL-DTL-15291.

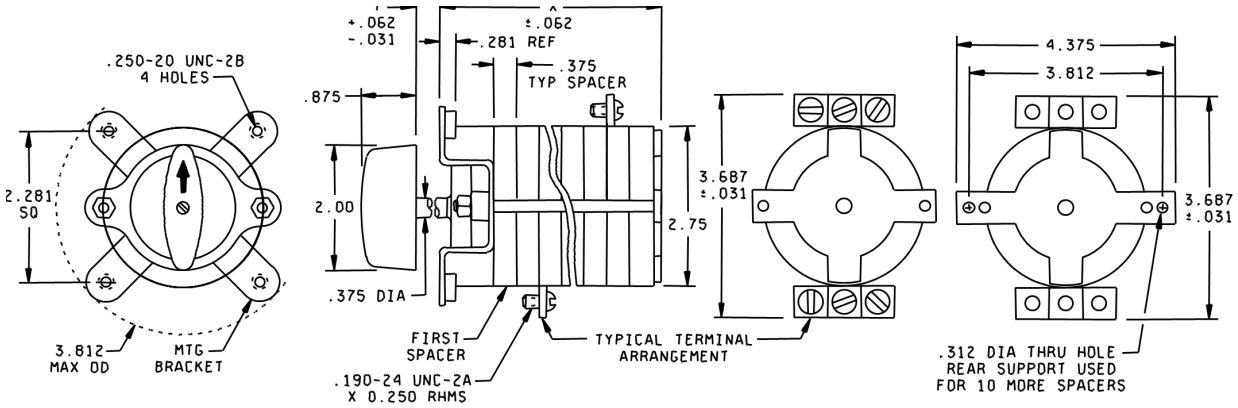


NOTE
1. Dimensions are in inches
2. Unless otherwise specified, tolerance is plus or minus 0.015

FIGURE 1 Front mounted, side connected.

AMSC N/A
FSC 5930
DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:59Z
Check the source to verify that this is the current version before use.

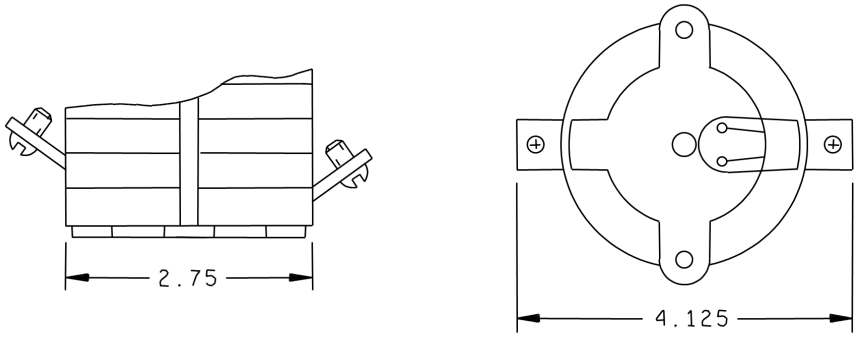



FIGURE 1A.


































































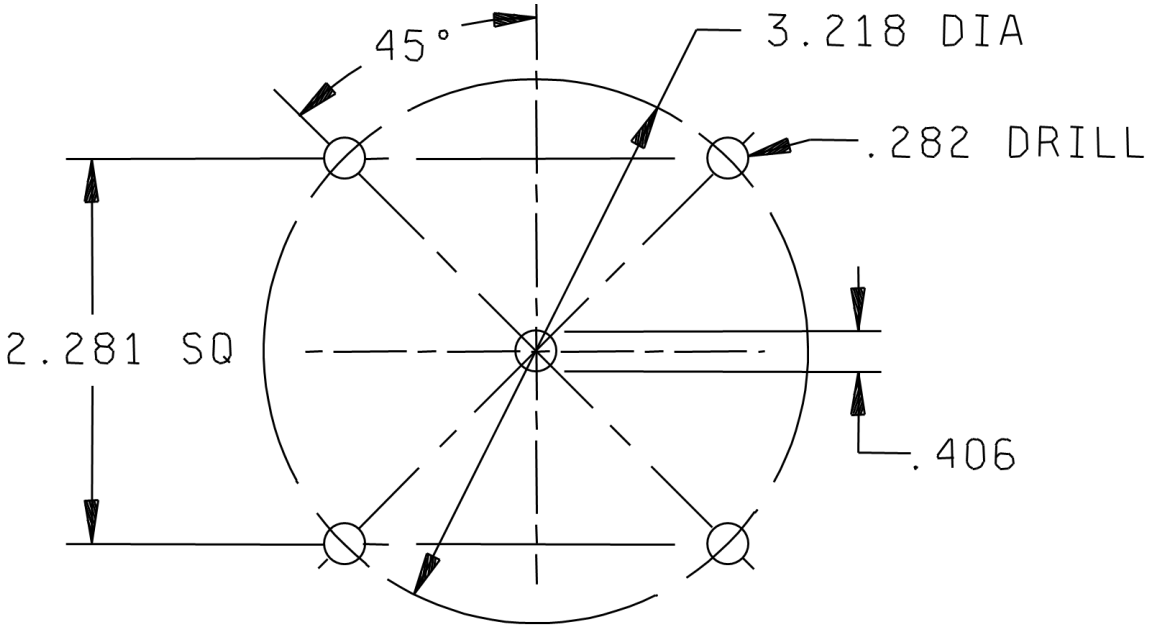



FIGURE 2. Panel mounting dimensions.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:59Z
Check the source to verify that this is the current version before use.

TABLE I Type and switching characteristics

| M15291/6 DASH NO. TYPE DESIGNATION | DETAIL REF / TORQUE IN-LBS | DIM "X" / DIM "Y" | HANDLE OR SHAFT POSITION | CIRCUIT AND SPACER CONFIGURATIONS ROTOR POSITION, SPACER LOCATIONS, TERMINAL MARKING AND LOCATIONS NO 1 | NO 2 | NO 3 | NO 4 | NO 5 | NO 6 | NO 7 | NO 8 | NO 9 | NO 10 | NO 11 | NOTES |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| -001 | FIG 1 | 1.875 |  | |  | | | | | | | | | | |
| | 9 | .375 | | | | | | | | | | | | | |
| -002 | FIG 1 | 2.250 |  | |  |  | | | | | | | | | |
| | 9 | .375 | | | | | | | | | | | | | |
| -003 | FIG 1 | 2.625 |  | |  |  |  | | | | | | | | |
| 3SR3A2 | 9 | .375 | | | | | | | | | | | | | |
| -004 | FIG 1 | 3.000 |  | |  |  |  |  | | | | | | | |
| 3SR4A2 | 9 | .375 | | | | | | | | | | | | | |
| -005 | FIG 1 | 3.375 |  | |  |  |  |  |  | | | | | | |
| | 9 | .375 | | | | | | | | | | | | | |
| -006 | FIG 1 | 3.750 |  | |  |  |  |  |  |  | | | | | |
| 3SR6A2 | 9 | .437 | | | | | | | | | | | | | |
| -007 | FIG 1 | 4.125 |  | |  |  |  |  |  |  |  | | | | |
| | 9 | .437 | | | | | | | | | | | | | |
| -008 | FIG 1 | 4.500 |  | |  |  |  |  |  |  |  |  | | | |
| 3SR8A2 | 9 | .437 | | | | | | | | | | | | | |
| -009 | FIG 1 | 5.125 |  | |  |  |  |  |  |  |  |  |  | | |
| 3SR9A2 | 10 | .437 | | | | | | | | | | | | | |
| -010 | FIG 1 | 5.500 |  | |  |  |  |  |  |  |  |  |  |  | |
| | 10 | .437 | | | | | | | | | | | | | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:59Z
Check the source to verify that this is the current version before use.

TABLE I Type and switching characteristics – Continued

| M15291/6 DASH NO. TYPE DESIGNATION | DETAIL REF / TORQUE IN-LBS | DIM "X" / DIM "Y" | HANDLE OR SHAFT POSITION | CIRCUIT AND SPACER CONFIGURATIONS ROTOR POSITION, SPACER LOCATIONS, TERMINAL MARKING AND LOCATIONS | | | | | | | | | | | | | NOTES |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | NO 1 | NO 2 | NO 3 | NO 4 | NO 5 | NO 6 | NO 7 | NO 8 | NO 9 | NO 10 | NO 11 | NO 12 | NO 13 | |
| -011 | FIG 1 | 2.250 | OFF / ON 1 / ON 2 / OFF | | 1 2 3 | | | | | | | | | | | | |
| | 9 | .437 | | | | | | | | | | | | | | | |
| -012 | FIG 1 | 3.000 | OFF / ON 1 / ON 2 / OFF | | 1 2 3 | | 4 5 6 | | | | | | | | | | |
| | 9 | .437 | | | | | | | | | | | | | | | |
| -013 | FIG 1 | 3.750 | OFF / ON 1 / ON 2 / OFF | | 1 2 3 | | 4 5 6 | | 7 8 9 | | | | | | | | |
| 3SR3B2 | 9 | .437 | | | | | | | | | | | | | | | |
| -014 | FIG 1 | 4.500 | OFF / ON 1 / ON 2 / OFF | | 1 2 3 | | 4 5 6 | | 7 8 9 | | 10 11 12 | | | | | | |
| 3SR4B2 | 9 | .437 | | | | | | | | | | | | | | | |
| -015 | FIG 1 | 5.250 | OFF / ON 1 / ON 2 / OFF | | 1 2 3 | | 4 5 6 | | 7 8 9 | | 10 11 12 | | 13 14 15 | | | | |
| | 9 | .437 | | | | | | | | | | | | | | | |
| -016 | FIG 1 | 6.000 | OFF / ON 1 / ON 2 / OFF | | 1 2 3 | | 4 5 6 | | 7 8 9 | | 10 11 12 | | 13 14 15 | | 16 | 17 18 | |
| | 9 | .437 | | | | | | | | | | | | | | | |
| -017 | FIG 1 | 1.875 | ON 1 / ON 1 / ON 2 / ON 1 | | 1 2 3 4 | | | | | | | | | | | | |
| | 9 | .437 | | | | | | | | | | | | | | | |
| -018 | FIG 1 | 2.625 | ON 1 / ON 1 / ON 2 / ON 1 | | 1 2 3 4 | | 5 6 7 8 | | | | | | | | | | |
| | 9 | .437 | | | | | | | | | | | | | | | |





Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:59Z
Check the source to verify that this is the current version before use.

TABLE I. Type and switching characteristics – Continued

| M15291/6 DASH NO. TYPE DESIGNATION | DETAIL REF / TORQUE IN-LBS | DIM "X" / DIM "Y" | HANDLE OR SHAFT POSITION | CIRCUIT AND SPACER CONFIGURATIONS ROTOR POSITION, SPACER LOCATIONS, TERMINAL MARKING AND LOCATIONS | | | | | | | | | | | | NOTES |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | NO 1 | NO 2 | NO 3 | NO 4 | NO 5 | NO 6 | NO 7 | NO 8 | NO 9 | NO 10 | NO 11 | NO 12 | |
| -019 | FIG 1 | 3.375 | ON 1 / ON 2 / ON 1 | | 1 2 4 3 | | 5 6 8 7 | | 9 10 12 11 | | | | | | | |
| 3SR3C2 | 9 | .437 | | | | | | | | | | | | | | |
| -020 | FIG 1 | 4.125 | ON 1 / ON 2 / ON 1 | | 1 2 4 3 | | 5 6 8 7 | | 9 10 12 11 | | 13 14 16 15 | | | | | |
| | 9 | .437 | | | | | | | | | | | | | | |
| -021 | FIG 1 | 4.875 | ON 1 / ON 2 / ON 1 | | 1 2 4 3 | | 5 6 8 7 | | 9 10 12 11 | | 13 14 16 15 | | 17 18 20 19 | | | |
| | 9 | .437 | | | | | | | | | | | | | | |
| -022 | FIG 1 | 5.625 | ON 1 / ON 2 / ON 1 | | 1 2 4 3 | | 5 6 8 7 | | 9 10 12 11 | | 13 14 16 15 | | 17 18 20 19 | | 21 22 24 23 | |
| | 9 | .437 | | | | | | | | | | | | | | |
| -023 | FIG 1 | 2.250 | OFF / ON 3 / ON 1 / ON 2 | | | 2 4 3 | | | | | | | | | | |
| | 9 | .437 | | | | | | | | | | | | | | |
| -024 | FIG 1 | 3.000 | OFF / ON 3 / ON 1 / ON 2 | | 1 | 2 | 5 | 6 8 7 | | | | | | | | |
| | 9 | .437 | | | | | | | | | | | | | | |
| -025 | FIG 1 | 3.750 | ON 1 / ON 3 / ON 1 / ON 2 | | 1 | 2 4 3 | | 8 7 | | | | | | | | |
| | 9 | .437 | | | | | | | | | | | | | | |
| -026 | FIG 1 | 4.500 | OFF / ON 3 / ON 2 / ON 2 | | 1 | 2 4 3 | 5 | 6 8 7 | 9 | 10 12 11 | 13 | 14 16 15 | | | | |
| | 9 | .437 | | | | | | | | | | | | | | |





Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:59Z
Check the source to verify that this is the current version before use.

TABLE I. Type and switching characteristics – Continued

| M15291/6 DASH NO. TYPE DESIGNATION | DETAIL REF / TORQUE IN-LBS | DIM "X" / DIM "Y" | HANDLE OR SHAFT POSITION | CIRCUIT AND SPACER CONFIGURATIONS ROTOR POSITION, SPACER LOCATIONS, TERMINAL MARKING AND LOCATIONS | NOTES |
|---|---|---|---|---|---|
| | | | | NO 1 / NO 2 / NO 3 / NO 4 / NO 5 / NO 6 / NO 7 / NO 8 / NO 9 / NO 10 / NO 11 / NO 12 / NO 13 | |
| -027 | FIG 1 | 2.250 | OFF, ON 1&2 | | |
| | 9 | .437 | | | |
| -028 | FIG 1 | 3.000 | OFF, ON 1&2 | | |
| | 9 | .437 | | | |
| -029 | FIG 1 | 3.750 | OFF, ON 1&2 | | |
| | 9 | .437 | | | |
| -030 | FIG 1 | 4.750 | OFF, ON 1&2 | | |
| 3SR8F2 | 18 | .437 | | | |
| -031 | FIG 1 | 5.500 | OFF, ON 1&2 | | |
| 3SR10F2 | 18 | .437 | | | |
| -032 | FIG 1 | 6.250 | OFF, ON 1&2 | | |
| | 18 | .437 | | | |
| -033 | FIG 1 | 4.500 | OFF | | |
| 3SR6A2A | 9 | .437 | | | |
| -034 | FIG 1 | 3.750 | ON 2, OFF | | |
| 3SR3E2 | 9 | .437 | | | |
| -035 | FIG 1<br>FIG 1A | 3.750 | ON 1, OFF | | TERM CONFORM TO FIG 14 |
| 3SR3S2 | 9 | .250 | | | |





Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:59Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Applicable specification: MIL-DTL-15291

Dimensions and mounting: See figures 1 and 2

Switching characteristics: See table I

Angle of throw: 90 degrees

Switching action: Snap action, reciprocating

Electrical and endurance ratings: See table II

Stop strength (applicable to switches with stops): 100 inch-pounds

Vibration: 50 Hz, MIL-STD-167-1

Shock (high impact): High impact, MIL-DTL-901

Contact resistance: 0.01 milliohms maximum

Dielectric withstanding voltage: 2,000 Vrms

Insulation resistance: 200 megohms minimum

Temperature rise: 50°C maximum

Mounting screws: .250-20UNC-2A (4) length and headstyle to suit application, screws not furnished.

Handle: M15291/5-100 per MIL-DTL-15291/5.

TABLE II Electrical and endurance ratings.

| Tests | Current (amperes) | Voltage (volts) | Electrical Operations (number of operations) | Test rate (operations per minute) | De-energized operations (number of operations) |
|---|---|---|---|---|---|
| Alternating current (rms) | 30 | 500 | 20,000 | 30 | 10,000 |
| Direct current | 30 | 250 | 15,000 | 15 | -- |

Terminal marking: Terminal markings shown in table I locate terminals as viewed from the front of the switch (handle end) Markings shall be stamped in rear surfaces of terminals, clear of the screw heads.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:59Z
Check the source to verify that this is the current version before use.


GENERAL INFORMATION:

Switches not covered by specification sheets: Switches which are fabricated from standard parts, as used in qualified switches, but which do not comply with switches detailed herein with respect to circuit characteristics, switching action, mounting arrangement, and handle details may be acquired under this specification from contractors having qualification approval under this specification.

Extended ratings: Switches detailed herein have been tested and found satisfactory at the extended ratings listed in table III. Reduced life expectancy must be anticipated for switches used at these increased voltage or current levels. Tests under the conditions of table III are not required for qualification acceptance and they are not repeated routinely as for maintenance of qualification. Supplemental evaluations and tests applicable to particular circuit requirements are recommended.

Sealed mounting: Switches listed in table I as having 'Y" dimension not less than 7/16 inch can be mounted with a kit, figure 3, to effect a submersible seal (SBM 15) between switch and mounting panel. Panel drilling must comply with figure 4. Kits not supplied unless specified (see 6.2 of MIL-DTL-15291).

APPLICATION AND ACQUISITION GUIDE: PIN and type designation cross reference shall be as shown in table IV.

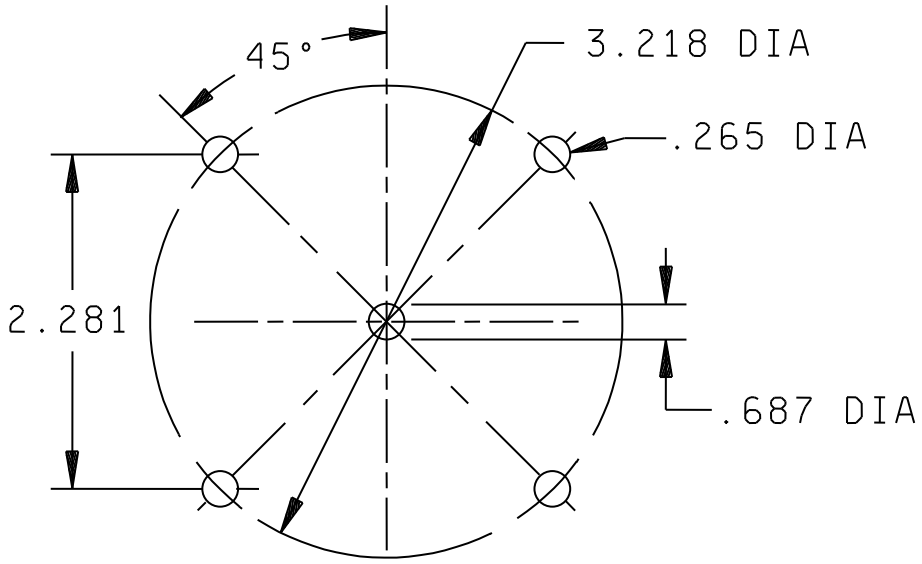


NOTE

1. Do not chamfer mounting holes. Breaking 1/64 maximum permissible.

FIGURE 4. Panel drilling for mounting kit.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:59Z
Check the source to verify that this is the current version before use.


TABLE III. Extended ratings.

| Switching characteristics | AC 60 or 400 Hz | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | 125 volts | | | | 250 volts | | | | 500 volts | | | |
| | Resistive or lamp load | | Inductive load 0.75 p.f. | | Resistive or lamp load | | Inductive load 0.75 p.f. | | Resistive or lamp load | | Inductive load 0.75 p.f. | |
| | Amp. | Operations | Amp. | Operations | Amp. | Operations | Amp. | Operations | Amp. | Operations | Amp. | Operations |
| All 1/ | 30 | 20,000 | 30 | 20,000 | 30 | 20,000 | 30 | 20,000 | 30 | 20,000 | 30 | 20,000 |
| C,E, F | 40 | 6,000 | 40 | 6,000 | -- | -- | -- | -- | -- | -- | -- | -- |
| A, B 1/ | 40 | 6,000 | 40 | 6,000 | 30 | 6,000 | 30 | 6,000 | 30 | 6,000 | 30 | 6,000 |
| | DC | | | | | | | | | | | |
| | 120 volts | | | | 250 volts | | | | 350 volts | | | |
| | Resistive or Lamp load | | Inductive load[3] | | Resistive or Lamp load | | Inductive load[3] | | Resistive or Lamp load | | Inductive load[3] | |
| | Amp. | Operations | Amp. | Operations | Amp. | Operations | Amp. | Operations | Amp. | Operations | Amp. | Operations |
| All | 30 | 13,000 | 25 | 6,000 | 15 | 13,000 | -- | -- | -- | -- | -- | -- |
| A, B | 30 | 15,000 | 25 | 6,000 | 25 | 6,000 | 25 | 6,000 | 15 | 6,000 | 15 | 6,000 |
| A, B 3/ | -- | -- | -- | -- | 30 | 15,000 | -- | -- | -- | -- | -- | -- |

[1]Single pole break – all other ratings are based on breaking both sides of the line in accordance with figures 1 and 2 of MIL-DTL-15291.
[2]0.08 henry for inductive circuit
[3]Switch with special arc snuffers




Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:59Z
Check the source to verify that this is the current version before use.

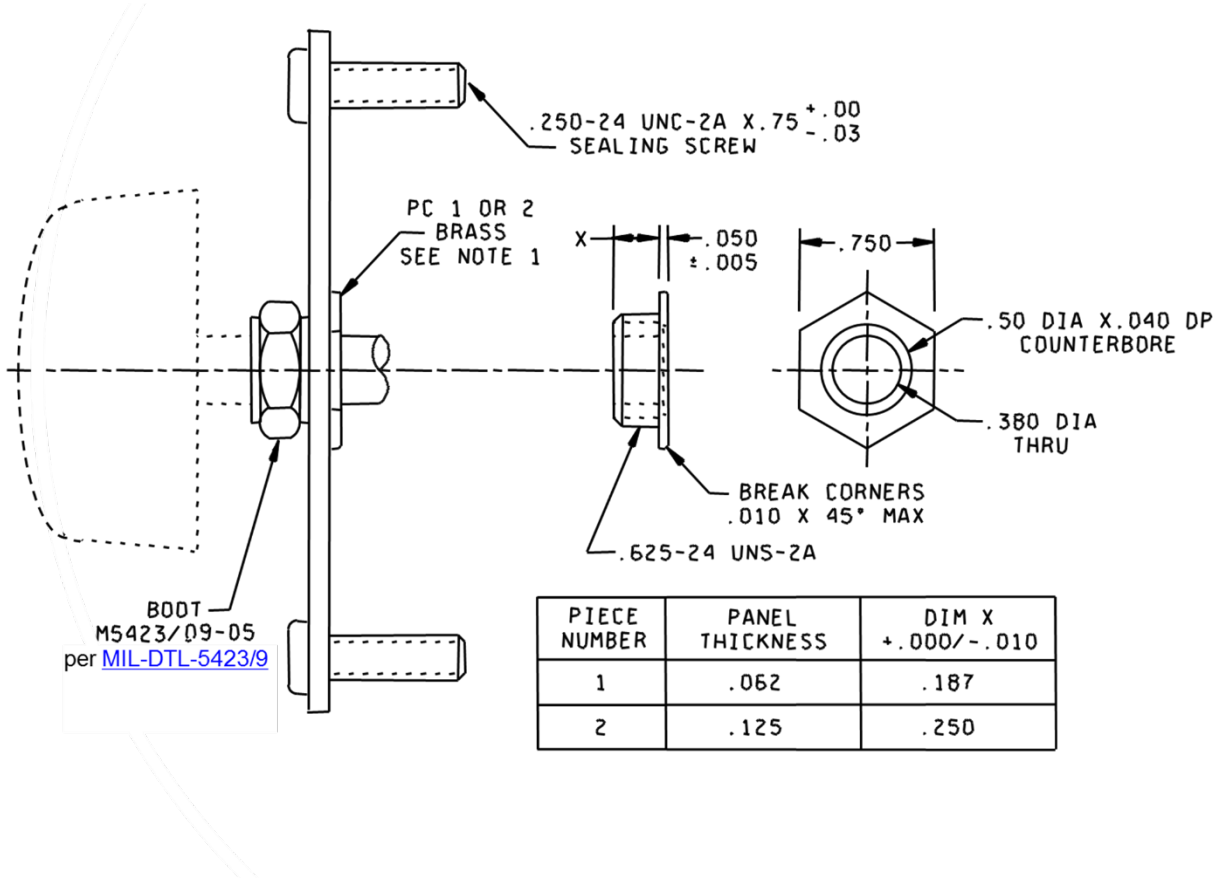


| PIECE NUMBER | PANEL THICKNESS | DIM X +.000/-.010 |
|---|---|---|
| 1 | .062 | .187 |
| 2 | .125 | .250 |

NOTE
1 Finish shall be zinc and dichromate, ASTM-B633

FIGURE 3. Kit for panel seal mounting.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:59Z
Check the source to verify that this is the current version before use.

TABLE IV. Application and acquisition guide.

| M15291/6 dash No. | Type designation | For new or existing design | For re-placement | Circuit configuration |
|---|---|---|---|---|
| -001 | - | X | | A (off-on-off-on) |
| -002 | - | X | | A (off-on-off-on) |
| -003 | 3SR3A2 | X | | A (off-on-off-on) |
| -004 | 3SR4A2 | X | | A (off-on-off-on) |
| -005 | - | X | | A (off-on-off-on) |
| -006 | 3SR6A2 | X | | A (off-on-off-on) |
| -007 | - | X | | A (off-on-off-on) |
| -008 | 3SR8A2 | X | | A (off-on-off-on) |
| -009 | 3SR9A2 | X | | A (off-on-off-on) |
| -010 | - | X | | A (off-on-off-on) |
| -011 | - | X | | A (off-on-off-on) |
| -012 | - | X | | B (off-on-1-off-on 2) |
| -013 | - | X | | B (off-on-1-off-on 2) |
| -014 | 3SR4BS | X | | B (off-on-1-off-on 2) |
| -015 | - | X | | B (off-on-1-off-on 2) |
| -016 | - | X | | B (off-on-1-off-on 2) |
| -017 | - | X | | B (off-on-1-off-on 2) |
| -018 | - | X | | C (on 1-on 2-on 1-on 2) |
| -019 | 3SR3C2 | X | | C (on 1-on 2-on 1-on 2) |
| -020 | - | X | | C (on 1-on 2-on 1-on 2) |
| -021 | - | X | | C (on 1-on 2-on 1-on 2) |
| -022 | - | X | | C (on 1-on 2-on 1-on 2) |
| -023 | - | X | | C (on 1-on 2-on 1-on 2) |
| -024 | 3SR2E2 | X | | E (off-on 1-on 2-on 3) |
| -025 | 3SR3E2A | X | | E (off-on 1-on 2-on 3) |
| -026 | - | X | | E (off-on 1-on 2-on 3) |
| -027 | - | X | | E (off-on 1-on 2-on 3) |
| -028 | - | X | | F (off-on 1-on 1 & 2-on 2) |
| -029 | - | X | | F (off-on 1-on 1 & 2-on 2) |
| -030 | 3SR8F2 | X | | F (off-on 1-on 1 & 2-on 2) |
| -031 | 3SR10F2 | X | | F (off-on 1-on 1 & 2-on 2) |
| -032 | - | X | | F (off-on 1-on 1 & 2-on 2) |
| -033 | 3SR8A2A | X | | A (off-on-off-on) |
| -034 | 3SR3E2 | X | | E (on- 2-on 3-off-on 1) |
| -035 | 3SR3S2 | X | | S (on 1-on 2-off-off) |



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:59Z
Check the source to verify that this is the current version before use.

Referenced Documents:
- MIL-DTL-15291
- MIL-DTL-15291/5
- MIL-DTL-5423/9
- MIL-DTL-901
- MIL-STD-167-1
- ASTM-B633

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Custodians:
- Navy - SH
- DLA - CC

Preparing activity:
- DLA - CC

(Project 5930-2025-040)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/ .



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:59Z
Check the source to verify that this is the current version before use.