
INCH-POUND
MIL-DTL-15291/7D
21 August 2026
SUPERSEDING
MIL-DTL-15291/7C
21 January 2022

DETAIL SPECIFICATION SHEET

SWITCHES, ROTARY, SNAP ACTION CLASS 3SR BASE MOUNTED, SIDE CONNECTED

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the switch described herein shall consist of this specification and the latest issue of MIL-DTL-15291.

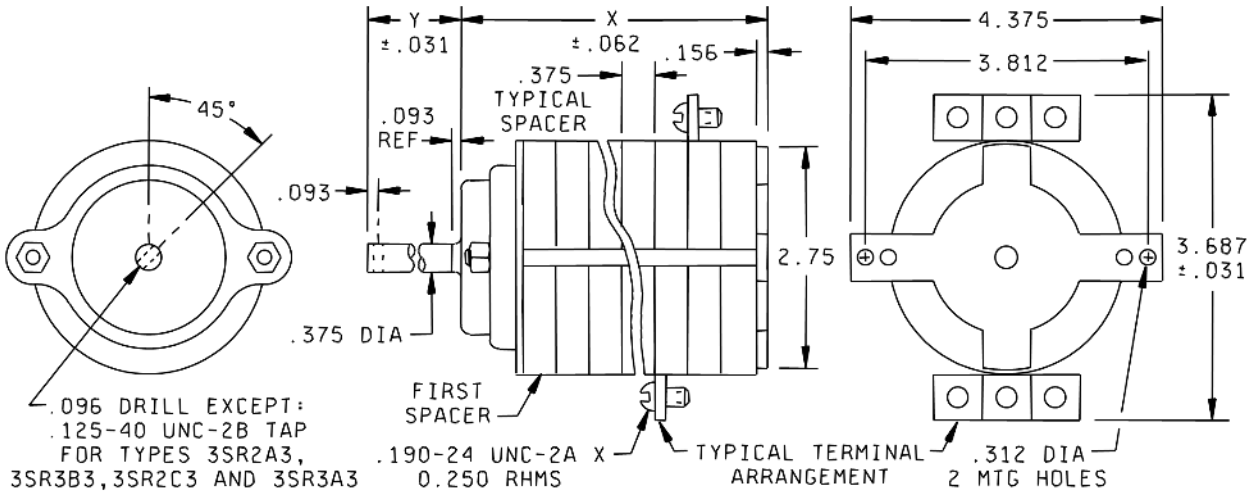

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ± 0.015.

FIGURE 1. Base mounted, side connected.

AMSC N/A
DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited

FSC 5930

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:59Z
Check the source to verify that this is the current version before use.

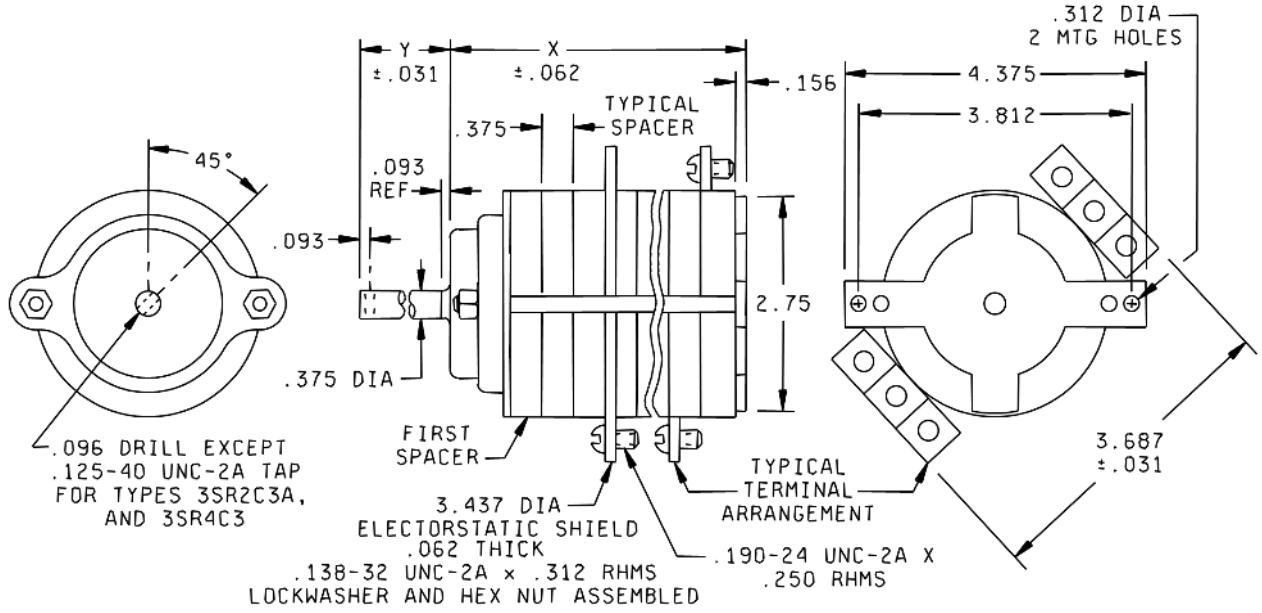


FIGURE 2. Base mounted, side connected, with electrostatic shield.

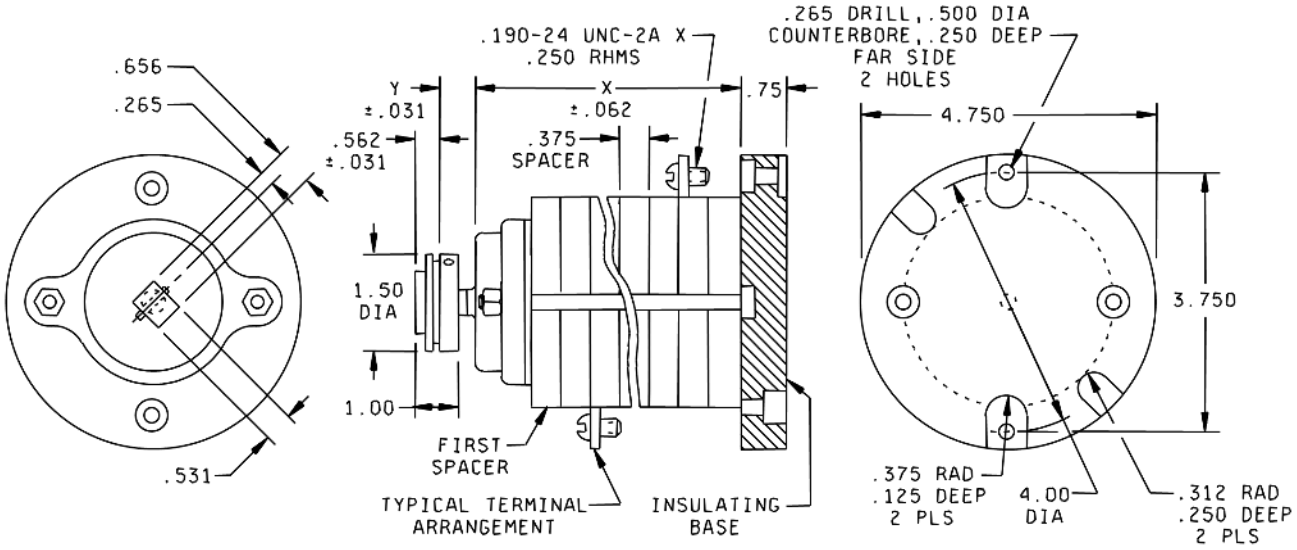


FIGURE 3. Side connected, with insulated base mounting.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:59Z
Check the source to verify that this is the current version before use.

TABLE I. Type and switching characteristics.

M15291/7 DASH NO. TYPE DESIGNATION	DETAIL REF / TORQUE IN-LBS	DIM "X" / DIM "Y"	HANDLE OR SHAFT POSITION	CIRCUIT AND SPACER CONFIGURATIONS ROTOR POSITION, SPACER LOCATIONS, TERMINAL MARKING AND LOCATIONS NO 1	NO 2	NO 3	NO 4	NO 5	NO 6	NO 7	NO 8	NO 9	NOTES
-001	FIG 1	2.875	ON OFF / OFF ON			1 2	3 4						
3SR2A3	9	1.562											
-002	FIG 1	2.875	ON OFF / OFF ON			1 2	3 4						
3SR2A4	9	.562											
-003	FIG 3	3.468	ON OFF / OFF ON			1 2				3 4			
3SR2A4A	9	.562											
-004	FIG 1	3.250	ON OFF / OFF ON		1 2	3 4	5 6						
3SR3A3	9	1.562											
-005	FIG 1	2.500	ON OFF / OFF ON		1 2	3 4	5 6						
3SR3A4	9	.562											
-006	FIG 1	3.625	ON OFF / OFF ON		1 2	3 4	5 6	7 8	9 10	11 12			
	9	.562											
-007	FIG 1	2.875	OFF ON / OFF ON 2		1 2	3 4		5 6					
3SR2B4	9	.562											
-008	FIG 1	3.375	ON 1 OFF / OFF ON 2			1 2 3		4 5	6	7	8 9		
3SR3B3	9	1.562											
-009	FIG 1	3.625	ON 1 OFF / OFF ON 2		1 2 3		4 5	6	7	8 9			
3SR3B4	9	.562											

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:59Z
Check the source to verify that this is the current version before use.

TABLE I. Type and switching characteristics - Continued.

M15291/7 DASH NO. TYPE DESIGNATION	DETAIL REF / TORQUE IN-LBS	DIM "X" / DIM "Y"	HANDLE OR SHAFT POSITION	CIRCUIT AND SPACER CONFIGURATIONS ROTOR POSITION, SPACER LOCATIONS, TERMINAL MARKING AND LOCATIONS										NOTES
				NO 1	NO 2	NO 3	NO 4	NO 5	NO 6	NO 7	NO 8	NO 9	NO 9	
-010 3SR4B4	FIG 1 9	4.375 .562	ON 1 OFF OFF ON 2											
-011 3SR2C3	FIG 1 9	3.625 1.562	ON 2 ON 1 ON 1 ON 2											SEE NOTE
-012 3SR2C4	FIG 1 9	2.875 .562	ON 1 ON 2 ON 2 ON 1											SEE NOTE
-013 3SR2C4A	FIG 2 9	2.562 .562	ON 1 ON 2 ON 2 ON 1			SHIELD								SEE NOTE
-014 3SR3C3	FIG 2 9	3.250 1.562	ON 1 ON 2 ON 2 ON 1											SEE NOTE
-015 3SR4C4	FIG 1 9	3.312 .562	ON 1 ON 2 ON 2 ON 1				SHIELD							SEE NOTE
-016 3SR5C4	FIG 1 9	4.750 .562	ON 1 ON 2 ON 2 ON 1											SEE NOTE
-017 3SR4D4	FIG 1 9	4.375 .562	ON 1 ON 2 OFF OFF											SEE NOTE
-018 3SR754	FIG 1 9	3.250 .562												SEE NOTE

1/ External connectors shown on -011 through -016 are not supplied.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:59Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Applicable specification: MIL-DTL-15291.

Dimensions and mounting: MIL-DTL-15291.

Switching characteristics: See table I.

Angle of throw: 90 degrees.

Switching action: Snap action, reciprocating.

Electrical and endurance ratings: See table II.

Stop strength (applicable to switches with stops): 100 inch-pounds.

Vibration: 50 Hz, MIL-STD-167-1.

Shock: High impact, MIL-DTL-901.

Overload: 600 percent of ac rating, 50 make and break operations.

Contact resistance: 0.01 ohms maximum.

Dielectric withstanding voltage: 2,000 V rms.

Insulation resistance: 200 megohms minimum.

Temperature rise: 50°C maximum.

Mounting screws: .250-20UNC-2A (4) length and head style to suit application. Screws not furnished.

TABLE II. Electrical and endurance ratings.

Tests	Current (amperes)	Voltage (volts)	Electrical operations (number of operations)	Test rate (operations per minute)	De-energized operations (number of operations)
Alternating current (rms)	30	500	20,000	30	10,000
Direct current	30	250	15,000	15	---

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:59Z
Check the source to verify that this is the current version before use.

Terminal marking: Terminal markings shown in table I locate terminals as viewed from the front of the switch (handle end). Markings shall be stamped in front surfaces of terminals, clear of the screw heads.

GENERAL INFORMATION:

Switches not covered by specification sheets: Switches which are fabricated from standard parts, as used in qualified switches, but which do not comply with switches detailed herein with respect to circuit characteristics, switching action, mounting arrangement, and handle details may be acquired under this specification from contractors having qualification approval under this specification.

Extended ratings: Switches detailed herein have been tested and found satisfactory at the extended rating listed in table III. Reduced life expectancy must be anticipated for switches used at these increased voltage or current levels. Tests under the conditions of table III are not required for qualification acceptance and they are not repeated routinely as for maintenance of qualification. Supplemental evaluations and tests applicable to particular circuit requirements are recommended.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:59Z
Check the source to verify that this is the current version before use.

TABLE III. Extended ratings.

Switching characteristics	AC 60 or 400 Hz											
	125 volts				250 volts				500 volts			
	Resistive or lamp load		Inductive load 0.75 p.f.		Resistive or lamp load		Inductive load 0.75 p.f.		Resistive or lamp load		Inductive load 0.75 p.f.	
	Amp.	Operations	Amp.	Operations	Amp.	Operations	Amp.	Operations	Amp.	Operations	Amp.	Operations
All	30	20,000	30	20,000	30	20,000	30	20,000	30	20,000	30	20,000
C,D	40	6,000	40	6,000	--	--	--	--	--	--	--	--
A, B 1/	40	6,000	40	6,000	30	6,000	30	6,000	30	6,000	30	6,000
	DC											
	120 volts				250 volts				350 volts			
	Resistive or Lamp load		Inductive load[3]		Resistive or Lamp load		Inductive load[3]		Resistive or Lamp load		Inductive load[3]	
	Amp.	Operations	Amp.	Operations	Amp.	Operations	Amp.	Operations	Amp.	Operations	Amp.	Operations
All	30	13,000	25	6,000	15	13,000	--	--	--	--	--	--
A, B	30	15,000	25	6,000	25	6,000	25	6,000	15	6,000	15	6,000
A, B 3/	--	--	--	--	30	15,000	--	--	--	--	--	--

1/ Single pole break - all other ratings are based on breaking both sides of the line in accordance with figures 1 and 2 of MIL-DTL-15291.
2/ 0.08 henry for inductive current.
3/ Switch with special arc snuffers.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:59Z
Check the source to verify that this is the current version before use.

APPLICATION AND ACQUISITION GUIDE: PIN and type designation cross reference shall be as shown on table IV.

TABLE IV. Application and acquisition guide.

M15291/3 dash no.	Type designation	For new or existing design	For replacement	Circuit configuration
-001	3SR2A3		X	A (on-off-on-off)
-002	3SR2A4	X		A (on-off-on-off)
-003	3SR2A4A	X		A (on-off-on-off)
-004	3SR3A3		X	A (on-off-on-off)
-005	3SR4A4	X		A (on-off-on-off)
-006	---	X		A (on-off-on-off)
-007	3SR2B4	X		A (off-on1-off-on 2)
-008	3SR3B3		X	A (off-on1-off-on 2)
-009	3SR3B4	X		A (off-on1-off-on 2)
-010	3SR4B4	X		A (off-on1-off-on 2)
-011	3SR2C3		X	C (on 1-on 2-on 1-on 2)
-012	3SR2C4	X		C (on 1-on 2-on 1-on 2)
-013	3SRSC4A	X		C (on 1-on 2-on 1-on 2)
-014	3SR3C3		X	C (on 1-on 2-on 1-on 2)
-015	3SR4C4	X		C (on 1-on 2-on 1-on 2)
-016	3SR5C4	X		C (on 1-on 2-on 1-on 2)
-017	3SR4D4	X		D (on 1-on 2-off-off)
-018	3SR7S4	X		S (see table I)

Referenced Documents:
MIL-DTL-15291
MIL-DTL-901
MIL-STD-167-1

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Custodians:
Navy - SH
DLA - CC

Preparing activity:
DLA - CC

(Project 5930-2026-059)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/ .

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:59Z
Check the source to verify that this is the current version before use.