
INCH-POUND
MIL-DTL-15291/9D
21 August 2026
SUPERSEDING
MIL-DTL-15291/9C
21 January 2022

DETAIL SPECIFICATION SHEET

SWITCHES, ROTARY, SNAP ACTION CLASS 6SR FRONT MOUNTED, BACK CONNECTED

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the switch described herein shall consist of this specification and the latest issue of MIL-DTL-15291.

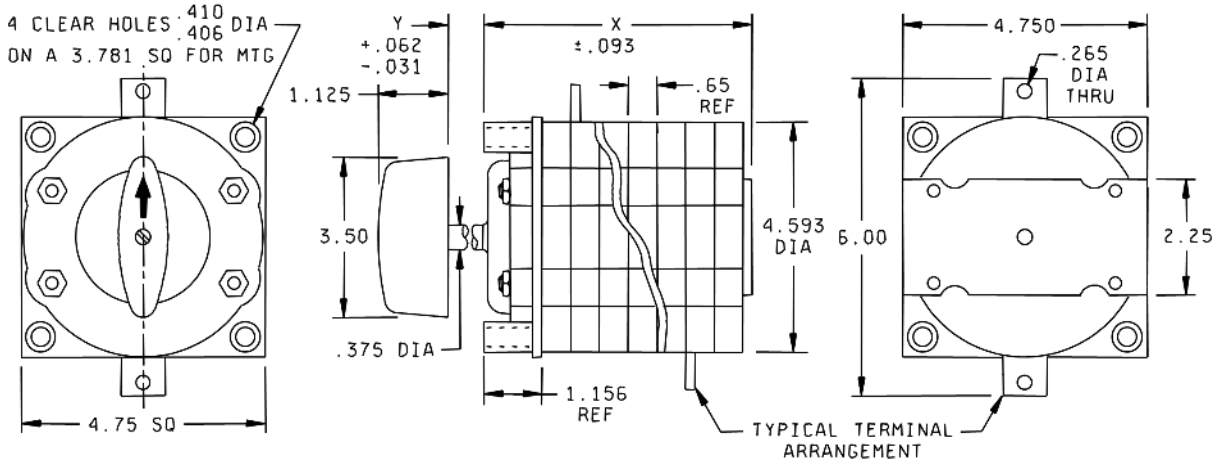

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ± 0.015.

FIGURE 1. Class 6SR switch, front mounted, side connected.

AMSC N/A
DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

FSC 5930

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:00Z
Check the source to verify that this is the current version before use.

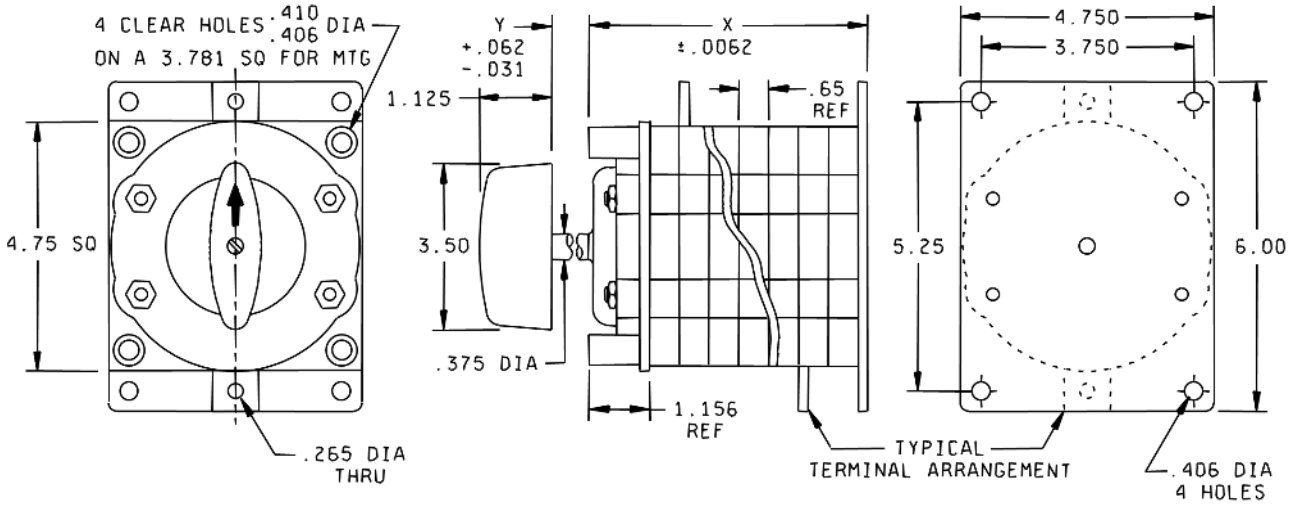


FIGURE 2. Class 6SR switch, front mounted, side connected, with rear support (10 or more sections).


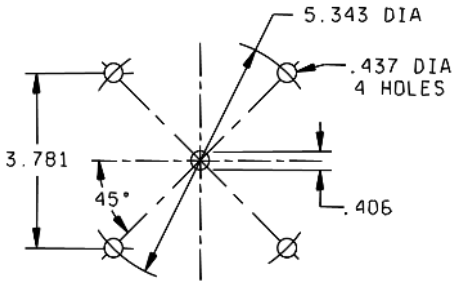


FIGURE 3. Panel mounting dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:00Z
Check the source to verify that this is the current version before use.

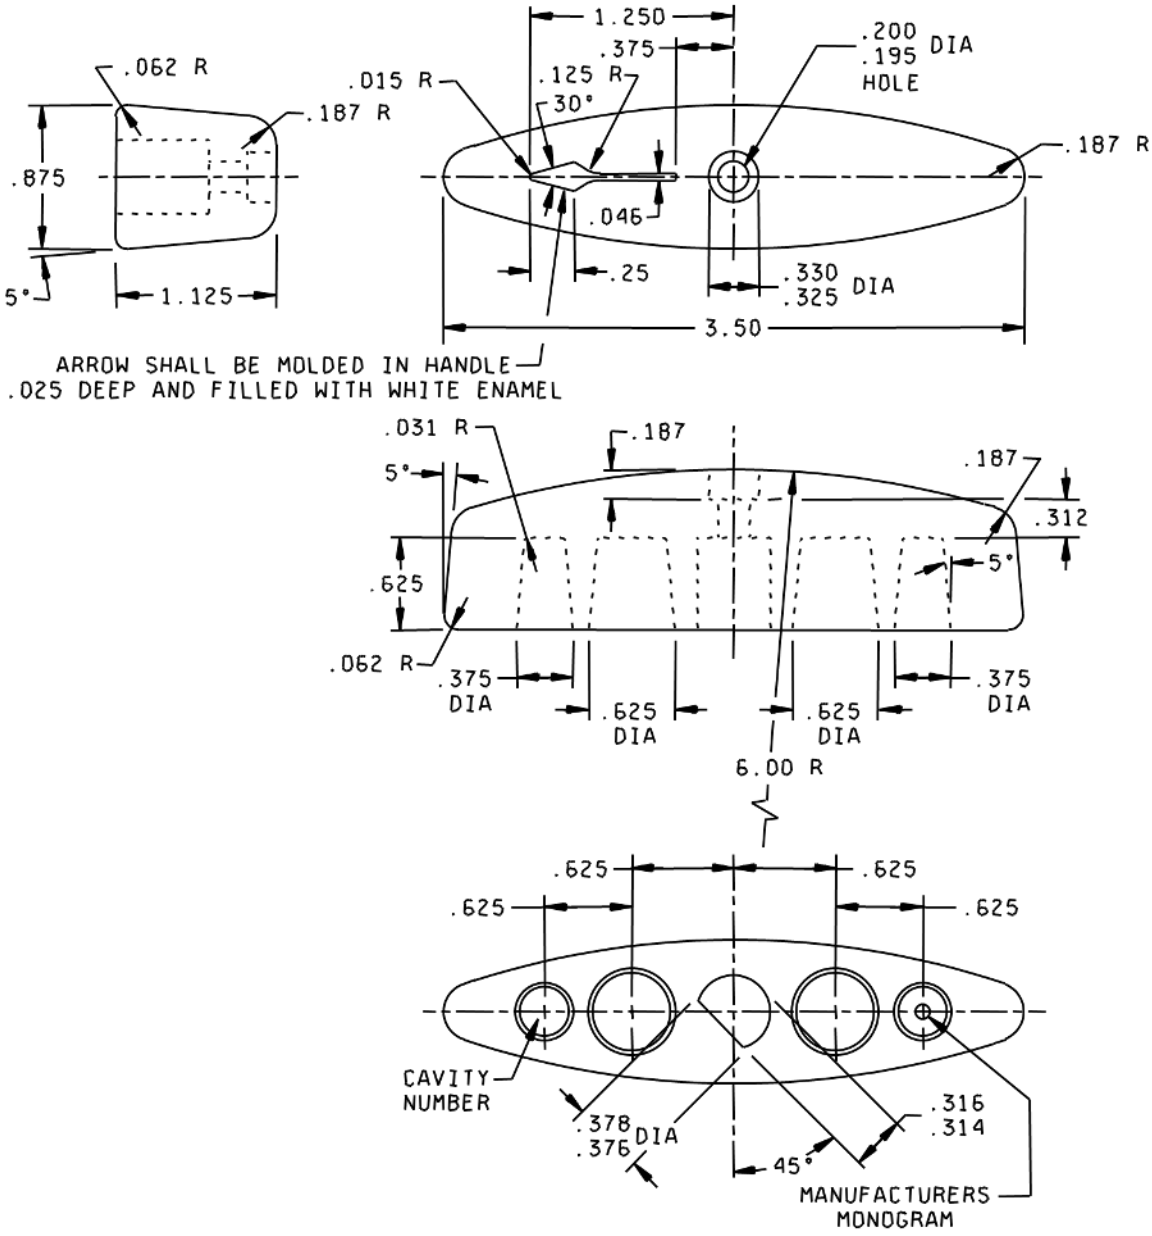

PIN M15291/9-100.

FIGURE 4. Handle.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:00Z
Check the source to verify that this is the current version before use.

TABLE I. Type and switching characteristics.

M15291/9 DASH NO. TYPE DESIGNATION	DETAIL REF	DIM "X"	DIM "Y"	HANDLE OR SHAFT POSITION	CIRCUIT AND SPACER CONFIGURATIONS ROTOR POSITION, SPACER LOCATIONS, TERMINAL MARKING AND LOCATIONS											NOTES
	TORQUE IN-LBS				NO 1	NO 2	NO 3	NO 4	NO 5	NO 6	NO 7	NO 8	NO 9	NO 10	NO 11	
-001	FIG 1	3.093														
	32	.437														
-002	FIG 1	3.937														
	32	.437														
-003	FIG 2	4.562														
	32	.437														
-004	FIG 1	5.218														
	32	.437														
-005 6SR6A2	FIG 1	5.875														
	32	.437														
-006 6SR8A2	FIG 1	7.187														
	42	.437														
-007 6SR10A2	FIG 2	8.500														
	42	.437														
-008 6SR2B2	FIG 1	4.562														
	32	.437														
-009	FIG 1	5.875														
	32	.437														

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:00Z
Check the source to verify that this is the current version before use.

TABLE I. Type and switching characteristics - Continued.

M15291/9 DASH NO. TYPE DESIGNATION	DETAIL REF	DIM "X"	HANDLE OR SHAFT POSITION	CIRCUIT AND SPACER CONFIGURATIONS ROTOR POSITION, SPACER LOCATIONS, TERMINAL MARKING AND LOCATIONS											NOTES
	TORQUE IN-LBS	DIM "Y"		NO 1	NO 2	NO 3	NO 4	NO 5	NO 6	NO 7	NO 8	NO 9	NO 10	NO 11	
-010	FIG 1	3.937													
	32	.437													
-011	FIG 1	4.093													
	32	.437													
-012	FIG 2	4.562													
	32	.437													
-013	FIG 1	5.875													
6SR5E2	32	.437													
-014	FIG 1	7.218													
	32	.437													
-015	FIG 2 DETAIL E	8.551													
	32	.437													

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:00Z
Check the source to verify that this is the current version before use.

TABLE I. Type and switching characteristics - Continued.

M15291/9 DASH NO. TYPE DESIGNATION	DETAIL REF	DIM "X"	HANDLE SHAFT POSITION	CIRCUIT AND SPACER CONFIGURATIONS ROTOR POSITION, SPACER LOCATIONS, TERMINAL MARKING AND LOCATIONS											NOTES
	TORQUE IN-LBS	DIM "Y"		NO 1	NO 2	NO 3	NO 4	NO 5	NO 6	NO 7	NO 8	NO 9	NO 10	NO 11	
-016	FIG 1	5.218	OFF												SEE NOTE
6SR4F2	32	.437	ON 1&2												
-017	FIG 1	6.562	OFF												SEE NOTE
6SR6F2	32	.437	ON 1&2												
-018	FIG 2	7.843	OFF												SEE NOTE
	42	.437	ON 1&2												
-019	FIG 1	3.937	OFF												
	32	.437	ON 1												
-020	FIG 1	4.562	OFF												
	32	.437	ON 1												
-021	FIG 1	3.937	ON 1												
	32	.437	ON 1												
-022	FIG 1	4.562	ON 1												
	32	.437	ON 1												
-023	FIG 1	3.937	OFF												
6SR3S2 (a)	32	.437	OFF												

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:00Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Applicable specification: MIL-DTL-15291.

Dimensions and mounting: See figures 1, 2, and 3.

Switching characteristics: See table I.

Angle of throw: 90 degrees.

Switching action: Snap action, reciprocating.

Electrical and endurance ratings: See table II.

Stop strength (applicable to switches with stops): 100 inch-pounds.

Vibration: 50 Hz, MIL-STD-167-1.

Shock: High impact, MIL-DTL-901.

Contact resistance: 0.005 ohms maximum.

Dielectric withstanding voltage: 2,000 V rms.

Insulation resistance: 200 megohms minimum.

Temperature rise: 50°C maximum.

Mounting screws: (4) .375 diameter, length, and headstyle to suit application. Bolts not furnished.

Terminal marking: Terminal markings shown in table I locate terminals as viewed from the front of the switch (handle end). Markings shall be stamped in rear surfaces of terminals, clear of the screw heads.

TABLE II. Electrical and endurance ratings.

Tests	Current (amperes)	Voltage (volts)	Electrical operations (number of operations)	Test rate (operations per minute)	De-energized operations (number of operations)
Alternating current (rms)	60	500	6,000	10	4,000
Direct current	60	250	4,000	5	---

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:00Z
Check the source to verify that this is the current version before use.

GENERAL INFORMATION:

Switches not covered by specification sheets: Switches which are fabricated from standard parts, as used in qualified switches, but which do not comply with switches detailed herein with respect to circuit characteristics, switching action, mounting arrangement, and handle details may be acquired under this specification from contractors having qualification approval under this specification.

Extended ratings: Switches detailed herein have been tested and found satisfactory at the extended rating listed in table III. Reduced life expectancy must be anticipated for switches used at these increased voltage or current levels. Tests under the conditions of table III are not required for qualification acceptance and they are not repeated routinely as for maintenance of qualification. Supplemental evaluations and tests applicable to particular circuit requirements are recommended.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:00Z
Check the source to verify that this is the current version before use.

TABLE III. Extended ratings.

Switching characteristics	AC 60 or 400 Hz											
	125 volts				250 volts				500 volts			
	Resistive or lamp load		Inductive load 0.75 p.f.		Resistive or lamp load		Inductive load 0.75 p.f.		Resistive or lamp load		Inductive load 0.75 p.f.	
	Amp.	Operations	Amp.	Operations	Amp.	Operations	Amp.	Operations	Amp.	Operations	Amp.	Operations
All	60	6,000	60	6,000	60	6,000	60	6,000	60	6,000	60	6,000
C, E, F	75	3,000	75	3,000	--	--	--	--	--	--	--	--
A, B 1/	75	3,000	75	3,000	60	3,000	60	3,000	60	3,000	60	3,000
	DC											
	120 volts				250 volts				350 volts			
	Resistive or Lamp load		Inductive load2		Resistive or Lamp load		Inductive load2		Resistive or Lamp load		Inductive load2	
	Amp.	Operations	Amp.	Operations	Amp.	Operations	Amp.	Operations	Amp.	Operations	Amp.	Operations
All	60	3,000	50	1,500	30	3,000	--	--	--	--	--	--
A, B	60	4,000	60	4,000	60	4,000	50	3,000	30	3,000	30	3,000

1/ Single pole break - all other ratings are based on breaking both sides of the line in accordance with figures 1 and 2 of MIL-DTL-15291.
2/ 0.08 henry for inductive current.
3/ Switch with special arc snuffers.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:00Z
Check the source to verify that this is the current version before use.

APPLICATION AND ACQUISITION GUIDE: PIN and type designation cross reference shall be as shown on table IV.

TABLE IV. Application and acquisition guide.

M15291/5 dash no.	Type designation	For new or existing design	For replacement	Circuit configuration
-001	---	X		A (off-on-off-on)
-002	---	X		A (off-on-off-on)
-003	---	X		A (off-on-off-on)
-004	---	X		A (off-on-off-on)
-005	6SR6A2	X		A (off-on-off-on)
-006	6SR8A2	X		A (off-on-off-on)
-007	6SR10A2	X		A (off-on-off-on)
-008	6SR2B2	X		B (off-on 1-off-on 2)
-009	---	X		B (off-on 1-off-on 2)
-010	---	X		C (on 1-on 2-on 1-on 2)
-011	---	X		E (off-on 1-on 2-on 3)
-012	---	X		E (off-on 1-on 2-on 3)
-013	6SR3E2	X		E (off-on 1-on 2-on 3)
-014	---	X		E (off-on 1-on 2-on 3)
-015	---	X		E (off-on 1-on 2-on 3)
-016	6SR4F2	X		F (off-on 1-on 1 and 2-on 2)
-017	6SR6F2	X		F (off-on 1-on 1 and 2-on 2)
-018	---	X		F (off-on 1-on 1 and 2-on 2)
-019	---	X		H (on 1-off-on 2)
-020	---	X		H (on 1-off-on 2)
-021	---	X		J (on 1-on 2-on 1-on 2)
-022'	---	X		J (on 1-on 2-on 1-on 2)
-023	6SR3S2(a)	X		S (see table I)

Referenced Documents:
MIL-DTL-15291 MIL-DTL-901 MIL-STD-167-1

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Custodians:
Navy - SH
DLA - CC

Preparing activity:
DLA - CC

(Project 5930-2026-061)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/ .

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:00Z
Check the source to verify that this is the current version before use.