INCH-POUND

MIL-DTL-15370/5D
24 January 2002
SUPERSEDING
MIL-C-15370/5C
22 September 1989

DETAIL SPECIFICATION SHEET

COUPLERS, DIRECTIONAL (WAVEGUIDE-CROSSGUIDE)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the couplers described herein shall consist of this document and the latest issue of MIL-DTL-15370.

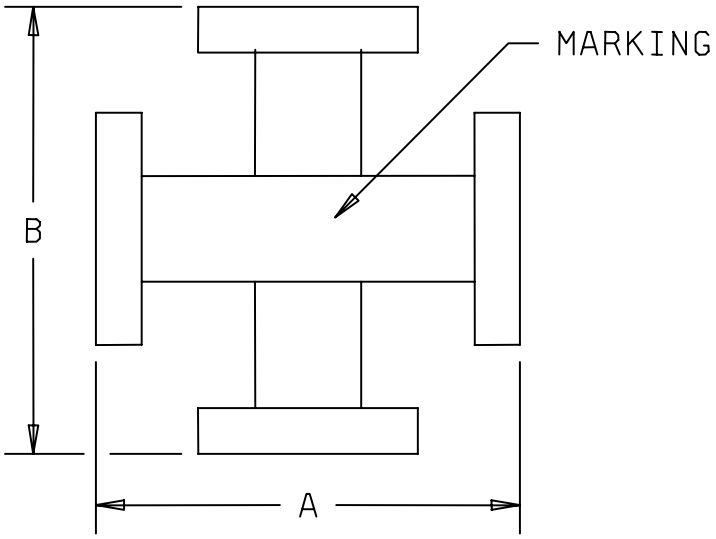

FIGURE 1. Dimensions and configuration for part numbers M15370/5-001, M15370/5-002 and M15370/5-007.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:09Z
Check the source to verify that this is the current version before use.

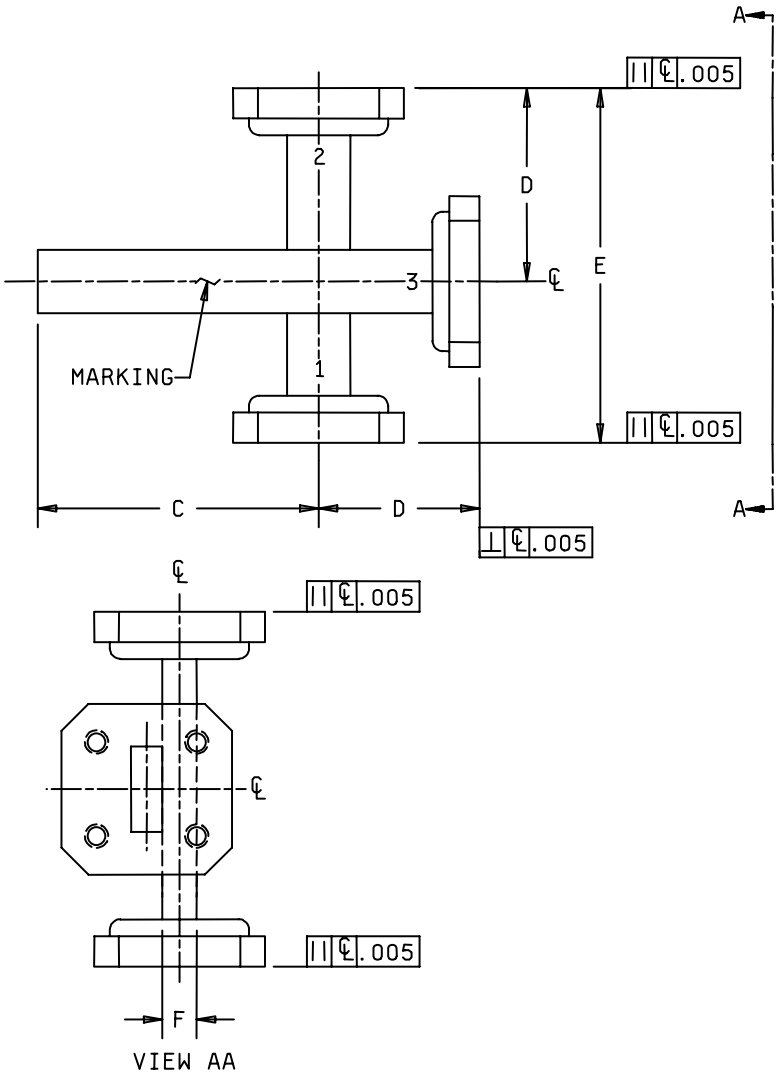

FIGURE 2. Dimensions and configuration for part numbers M15370/5-003 through M15370/5-006, and M15370/5-008 through M15370/5-014.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:09Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design, construction and physical dimensions: See figures 1 and 2, and table I.

Equivalent waveguide: See table II.

Flange: See table II.

Temperature range: -65°C to +95°C.

Coupling: See table II.

Coupling tolerance: See table II.

Coupling variation: See table II.

Effective directivity: See table II.

VSWR: See table II.

Frequency range: See table II.

Power rating: See table II.

Marking: See figures 1 and 2.

Cross-reference data: See table III.

Part number: M15370/5- (and a dash number from table I).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:09Z
Check the source to verify that this is the current version before use.

TABLE I. Physical characteristics.

Dash Number	Dimensions 1/ 2/ 3/							
	A		B		C	D	E	F
	Min	Max	Min	Max	Max	± .02	± .02	± .02
001NS	5.938 (150.83)	6.063 (154.00)	5.938 (150.83)	6.063 (154.00)	N/A	N/A	N/A	N/A
002NS	2.938 (74.63)	3.063 (77.80)	2.938 (74.63)	3.063 (77.80)	N/A	N/A	N/A	N/A
003NS	N/A	N/A	N/A	N/A	3.50 (88.90)	1.25 (31.75)	2.50 (63.50)	.39 (9.91)
004NS	N/A	N/A	N/A	N/A	3.50 (88.90)	1.25 (31.75)	2.50 (63.50)	.39 (9.91)
005NS	N/A	N/A	N/A	N/A	3.50 (88.90)	1.25 (31.75)	2.50 (63.50)	.39 (9.91)
006NS	N/A	N/A	N/A	N/A	3.50 (88.90)	1.25 (31.75)	2.50 (63.50)	.39 (9.91)
007NS	8.49 (215.65)	8.51 (216.15)	8.49 (215.65)	8.51 (216.15)	N/A	N/A	N/A	N/A
008NS	N/A	N/A	N/A	N/A	4.50 (114.3)	1.31 (33.27)	2.63 (66.80)	.39 (9.91)
009NS	N/A	N/A	N/A	N/A	4.50 (114.3)	1.31 (33.27)	2.63 (66.80)	.39 (9.91)
010NS	N/A	N/A	N/A	N/A	4.50 (114.3)	1.31 (33.27)	2.63 (66.80)	.39 (9.91)
011NS	N/A	N/A	N/A	N/A	2.88 (73.15)	1.12 (28.45)	2.25 (57.15)	.39 (9.91)
012NS	N/A	N/A	N/A	N/A	2.88 (73.15)	1.12 (28.45)	2.25 (57.15)	.39 (9.91)
013NS	N/A	N/A	N/A	N/A	2.88 (73.15)	1.12 (28.45)	2.25 (57.15)	.39 (9.91)
014NS	N/A	N/A	N/A	N/A	1.00 (25.4)	1.00 (25.4)	2.25 (57.15)	.39 (9.91)

1/ Dimensions are in inches.
2/ Metric equivalents (to the nearest .01 mm) are given for general information only.
3/ Metric equivalents are in parentheses.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:09Z
Check the source to verify that this is the current version before use.

TABLE II. Electrical characteristics.

Dash number	Frequency range	Coupling (dB)		Coupling variation (dB) max	Effective directivity (dB) min	VSWR max	Power Dissipation of internal load (avg)	Equivalent waveguide	Flange
		Nominal	Tolerance						
001NS	GHz 3.95-5.85	20	± 2.0	± 1.5	20	1.05:1	Watts 2	M85/1-055 (RG-49/U)	M3922/57-002 (UG-149A/U) 2/
002NS	8.2-12.4	20	± 2.0	± 1.5	20	1.05:1	1	M85/1-079 (RG-52/U)	M3922/53-001 (UG-39/U)
003NS	12.4-18.0	20	± 2.0	± 1.5	20	1.15:1	1	M85/1-090 (RG-349/U)	M3922/53-006 Port 1 (UG-1665/U) M3922/59-002 Ports 2 and 3 (UG-1666/U)
004NS	12.4-18.0	30	± 2.0	± 1.5	20	1.15:1	1	M85/1-090 (RG-349/U)	M3922/53-006 Port 1 (UG-1665/U) M3922/59-002 Ports 2 and 3 (UG-1666/U)
005NS	12.4-18.0	20	± 2.0	± 1.5	20	1.15:1	1	M85/1-090 (RG-349/U)	M3922/59-002 (UG-1666/U)
006NS	12.4-18.0	20	± 2.0	± 1.5	20	1.15:1	1	M85/1-090 (RG-349/U)	M3922/53-012 Ports 1 and 2 (UG-1665/U) Port 3 1/
007NS	1.70-2.60	60	± 2.0	± 1.5	20	1.10:1	1	M85/1-029 (RG-105/U)	M3922/52-006 (UG-1711/U)
008NS	8.2-12.4	30	± 1.0	± 0.5	20	1.10:1	1	M85/1-079 (RG-52/U)	M3922/53-001 (UG-39/U)
009NS	8.2-12.4	40	± 1.0	± 0.5	20	1.08:1	1	M85/1-079 (RG-52/U)	M3922/53-001 (UG-39/U)
010NS	8.2-12.4	50	± 1.0	± 0.5	20	1.05:1	1	M85/1-079 (RG-52/U)	M3922/53-001 (UG-39/U)
011NS	12.4-17.5	30	± 1.0	± 0.5	20	1.15:1	1	M85/1-090 (RG-349/U)	M3922/59-002 (UG-1666/U)
012NS	12.4-17.5	40	± 1.0	± 0.5	20	1.10:1	1	M85/1-090 (RG-349/U)	M3922/53-006 Port 1 (UG-1665/U) M3922/59-002 Ports 2 and 3 (UG-1666/U)
013NS	12.4-17.5	50	± 1.0	± 0.5	20	1.05:1	1	M85/1-090 (RG-349/U)	M3922/59-002 (UG-1666/U)
014NS	12.4-17.5	15	± 1.0	± 0.5	20	1.25:1	1	M85/1-090 (RG-349/U)	M3922/59-002 (UG-1666/U)

1/ Same as ports 1 and 2, except the lip thickness is .25 inch and tapped holes .138-32UNC-2B.
2/ MIL-F-3922/57 flange specification sheet is inactive for new design and is no longer used, except for replacement purposes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:09Z
Check the source to verify that this is the current version before use.

TABLE III. Cross-reference of part number/AN nomenclature.

Dash Number	AN nomenclature
001	CU-1506/U
002	CU-988/U

Custodians:
Army - CR
Navy - EC
Air Force - 11
DLA - CC

Review activities:
Navy - AS, CG, MC, OS, SH
Air Force - 99

Preparing activity:
DLA - CC

(Project 5985-1245-02)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:09Z
Check the source to verify that this is the current version before use.