MIL-L-15300D(MC)
1 December 1977
SUPERSEDING
MIL-L-15300C(MC)
24 February 1967

MILITARY SPECIFICATION

LANYARD, PISTOL AND WHISTLE: RAYON AND COTTON CORD; SCARLET AND GOLD

This specification is approved for use by the U S Marine Corps, Department of the Navy, and is available for use by all Department and Agencies of the Department of Defense.

1. SCOPE

1.1. Scope This specification covers the requirements for one type of lanyard.

2. APPLICABLE DOCUMENTS

2.1 Issue of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-B-17757 - Box, Shipping, Fiberboard (Modular Sizes)

STANDARDS

FEDERAL

FED-STD-191 - Textile Test Methods

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commandant of the Marine Corps (LMO-1), Headquarters, U S Marine Corps, Washington, D. C. 20380, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 8465

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:02Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.

MIL-STD-129 - Marking for Shipment and Storage.

(Copies of specifications and standards required by contractor in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply:

LAWS AND REGULATIONS

U. S. POSTAL SERVICE MANUAL

(Copies of the manual may be obtained from the Superintendent of Documents, U. S. Government Printing Office, Washington, D. C. 20402.)

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification Rules

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza; Chicago, Illinois 60606.)

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Association, Inc., Tariff Order Section, 1616 P Street, N.W., Washington, D. C. 20026.)

TEXTILE COLOR CARD ASSOCIATION OF THE UNITED STATES INC.

United States Army Color Card for the Arms and Services

(Application for copies should be addressed to the Textile Color Card Association of The United States, Inc., 200 Madison Avenue, New York, New York 10016.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:02Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Standard samples. Standard samples are furnished solely for guidance and information to the contractor (see 6.3). Variation from this specification may appear in the standard sample, in which case, the specification shall govern.

3.2 First article. Unless otherwise specified (see 6.2), the contractor shall furnish sample lanyard for first article inspection and approval.

3.3 Materials.

3.3.1 Cord. The cord shall be tubular, 7/32 ± 1/32 inch diameter, braided over the cotton core with a two over, two under weave and with not less than 16 picks per inch. The cord shall be braided on a 16-carrier machine, with two ends of scarlet rayon per carrier on 8 carriers and two ends of gold rayon per carrier on 8-carriers, equally spaced.

3.3.1.1 Outer cover. The outer cover of the cord shall be made of continuous filament rayon yarn, 450/3 denier. The colors shall be scarlet and gold matching cable No. 65006 and No. 65021, respectively as listed in United States Army color card for the Arms and Services. The dyed yarns shall show good fastness to light, laundering, perspiration, wet dry cleaning, and crocking when tested as specified in Section 4, Table I.

3.3.1.2 Core. The core shall consist of not less than 16 ends of 4-cord, 20/3-ply, cotton cable cord. The finished lanyard cord shall have a well rounded, firm appearance, and shall be of the specified diameter (see 3.3.1). The color of the core shall be gold, or a shade to closely match the color of the outer cover gold rayon yarn, and shall show good fastness to water when tested as specified in Section 4, Table I.

3.3.2 Cotton yarn. The cotton yarn shall be soft twist, 8/2 or equivalent. The color of the yarn shall be scarlet, showing good fastness to water when tested as specified in Section 4, Table I.

3.3.3 Slide cord. The slide cord shall be made of rayon yarn with cotton filler thread 2/2 ply or equivalent. The color of the cord shall be a reasonably close shade match to scarlet cable No. 65021 and shall show good fastness to light, laundering, perspiration, wet dry cleaning, and crocking when tested as specified in Section 4, Table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:02Z
Check the source to verify that this is the current version before use.

3.3.4 Metal parts. All metal parts of the lanyard except the spring for snap hook shall be made of copper alloy No. 230. The parts shall have a clean, bright finish free from pits and other defects, and shall conform to the following.

3.3.4.1 Snap hook. The snap hook shall be the swivel type shown on Figure 1, and shall be capable of withstanding a tension of not less than 100 pounds. The spring shall be made of copper alloy No. 530. The snap hook shall have a recessed, clinched spring construction as shown on Figure 1. The spring shall, after being fully depressed and released, snap shut with no gap between the spring and the hook.

3.3.4.2 Fasteners. The fasteners shall be made of 20 gage (0.032 inch nominal) sheet or strip, and shall be as shown on Figure 2. The side edges of the fasteners shall be serrated to grip the braided cord.

3.3.4.3 D rings. The D rings shall be made of 11 gage (0.0907 inch nominal) wire, and shall have an inside dimension of 1/2 ± 1/32 inch as shown on Figure 2. The ends of the D rings shall be butted together and aligned.

3.3.4.4 Slide keepers. The slide keepers shall be barrel shaped as shown on Figure 2. The keepers shall have a 5/16-inch inside diameter, a 3/32-inch wall thickness at the center, and shall be 5/8 ± 1/16 inch in length. The inside surface of the keepers shall be smoothly finished and the lip at each end shall be rounded to avoid abrasion of the cord.

3.3.5 Lacquer. The lacquer shall be a pale, clear, nonpigmented, synthetic lacquer which, when applied, shall not materially change the color and finish of the brass parts.

3.4 Design. The lanyards shall be made by plaiting a section of two strands of the scarlet and gold braided cord. The two strands shall be joined parallel to each other by brass slide keepers placed one at each end of the plaited sections, and by the specified brass parts attached to the ends of the strands, with the ends wrapped together with the cotton yarn and slide cord, as shown on Figure 2.

3.5 Construction.

3.5.1 Lacquering. All brass parts shall be thoroughly coated with one coat of lacquer. The dry lacquer film shall be continuous, level and adherent, and free from lint, dust or other foreign inclusions. All lacquered brass parts shall meet the tackiness test specified in 4.6.1.

3.5.2 Plaiting. Two strands of the braided cord shall be individually plaited with 28 ± 2 plaits, commencing 15-1/2 ± 1/2 inches from one end of strand.

3.5.3 Slide keepers construction. The two plaited strands shall be

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:02Z
Check the source to verify that this is the current version before use.

drawn through the slide keepers, with one keeper placed at each end of the plaited sections as shown on Figure 2.

3.5.4 Snap hook, D rings and fasteners. The snap hook and D rings shall be attached to the fasteners by rolling the end of the fastener securely over the D ring but permitting free rotation of the D ring. The 1-inch sides of the fasteners shall be rolled completely over the ends of the strands with each side staked securely at two places into each cord as shown on Figure 2.

3.5.5 Wrap ends. Both strands, at each end of the lanyard, shall be wrapped together tightly with the scarlet cotton yarn specified in 3.3.2, starting at the end of the fasteners and continuing for a distance of not less than 1/2 inch. The ends of the wrapping yarn shall be secured by the turns. The wrapped ends shall then be neatly and tightly overwrapped with not less than 20 full turns of the slide cord, with four to five full turns placed over the end of the fasteners. The ends of the slide cord shall be secured by the turns. The cotton wrapping yarn shall be completely covered by the slide cord overwrapping.

3.6 Finished length. The overall length of the lanyard shall be 60 $\pm$ 1 inches exclusive of the snap hook.

3.7 Workmanship. The lanyards shall conform to the quality established by this specification. Occurrence of defects shall not exceed the applicable acceptable quality levels (AQL's).

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.4).
2. Quality conformance inspection (see 4.5).

4.3 Inspection conditions. Unless otherwise specified, all inspections shall be performed in accordance with the test conditions specified in MIL-STD-105.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:02Z
Check the source to verify that this is the current version before use.

4.4 First article inspection. When first article is required, inspection shall be performed on a completely fabricated lanyard for conformance to all provisions of this specification.

4.5 Quality conformance inspection.

4.5.1 Inspection of components. In addition to the quality assurance provisions of the subsidiary specifications and standards, inspection shall be performed on component and materials as specified herein. When there is a conflict in quality assurance provisions, this specification shall govern.

4.5.1.1 Certificate of compliance. Components and materials listed below may be accepted on the basis of a contractor's certification of compliance for requirements specified in applicable paragraphs of this specification. The Government reserves the right to check test such items to determine the validity of the certification.

Component	Characteristics	Req. Paras
Snap hook (except spring)	Material identification.	3.3.4
Snap hook spring	Material identification.	3.3.4.1
Fastener, Brass	Material identification, gage, and side edges serrated.	3.3.4 and 3.3.4.2
D-ring	Material identification, gage, and ends butted together.	3.3.4 and 3.3.4.3
Slide keeper	Material identification and wall thickness at center.	3.3.4 and 3.3.4.4
Lacquer	Material identification.	3.3.5
Cotton yarn for underwrapping	Yarn count.	3.3.2
Outer cover rayon yarn	Continuous filament	3.3.1.1
Cord construction	Number of carriers and ends per carrier	3.3.1

4.5.1.2 Testing of components. Testing of components shall be in accordance with applicable subsidiary specifications referenced herein to the extent applicable, The method of testing specified in FED-STD-191, wherever applicable, and as listed in Table I shall be followed. All requirements are applicable to the sample unit. Sampling shall be in accordance with the following:

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:02Z
Check the source to verify that this is the current version before use.

Lot size	Sample size
800 or less	2
801 to 22,000 inclusive	3
22,001 and over	5

The lot shall be unacceptable if one or more sample units fail to meet any test requirement specified. The unit for expressing lot sizes and sample unit for testing each component shall be as follows:

Component	Lot size expressed as	Sample unit for testing
Cord	Yard	3 linear yards
Cotton yarn, underwrapping	Yard	1 cone, spool, or tube
Cotton yarn, overwrapping	Yard	1 cone, spool, or tube
Slide cord, overwrapping	Yard	1 cone, spool, or tube
Snap hooks	Each	1 hook

Table I - COMPONENT TESTING

Component	Characteristic	Regt. Para.	Test Method	No. determination per s/u	Results Rptd as
Rayon yarn outer cover of cord	Material identification 1/	3.3.1.1	Std Cml	1	Pass or Fail
	Size & Ply	3.3.1.1	Std Cml	1	
	Color	3.3.1.1	Visual	1	Pass or Fail
	Colorfastness to:				
	Light	3.3.1.1	5660		
	Laundering	3.3.1.1	5614		
	Wet-Dry Cleaning	3.3.1.1	5622		
	Crocking	3.3.1.1	5651		
	Perspiration	3.3.1.1	5680		
Core of Cord	Material identification 1/	3.3.1.2	Std Cml	1	Pass or Fail
	Number of Ends	3.3.1.2	Visual	1	To the nearest number
	Size and Ply	3.3.1.2	Std Cml	1	Pass or Fail
	Color	3.3.1.2	Visual	1	Pass or Fail

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:02Z
Check the source to verify that this is the current version before use.

Component	Characteristic	Regt. Para.	Test Method	No. determination per s/u	Results Rptd as
	Colorfastness to:				
	Water	3.3.1.2	5630	1	Pass or Fail
Cord	Diameter	3.3.1	Std Cml	3	To the nearest 1/32 in.
	Weave	3.3.1	Visual	1	Pass or Fail
	Picks/inch	3.3.1	Visual	3	To the nearest number
Cotton Yarn Underwrapping	Material identification 1/	3.3.2	Std Cml	1	Pass or Fail
	Color	3.3.2	Visual	1	Pass or Fail
	Ply	3.3.2	Visual	1	Pass or Fail
	Colorfastness to:				
	Water	3.3.2	5630	1	Pass or Fail
Slide Cord	Material identification 1/	3.3.3	Std Cml	1	Pass or Fail
	Color	3.3.3	Visual	1	Pass or Fail
	Ply	3.3.3	Std Cml	1	Pass or Fail
	Colorfastness to:				
	Light	3.3.3	5660		
	Laundering	3.3.3	5614		
	Wet-Dry Cleaning	3.3.3	5622		
	Crocking	3.3.3	5621		
	Perspiration	3.3.3	5680		
Snap Hook	Tension of spring	3.3.4.1	3.3.4.1	1	Pass or Fail

1/ A certificate of compliance may be submitted for this requirement.

4.5.2 In-process inspecting. Inspection shall be made at any point or during any phase of the manufacturing process to determine whether operations or assemblies are accomplished as specified. The Government reserves the right to exclude from consideration for acceptance any material or service for which in-process inspection has indicated non-conformance. In-process inspection shall be conducted to see that accomplishment of the following is in accordance with the specification requirements:

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:02Z
Check the source to verify that this is the current version before use.

Assembly and operation	Req. para.
Strands wrapped with cotton yarn	3.5.5

4.5.3 Inspection of the end item. The end item shall be examined for defects in 4.5.3.1 and 4.5.3.2. The inspection levels and AQL's shall be as specified in 4.5.3.3. The sample unit for these examinations shall be one lanyard.

4.5.3.1 End item defects. Defects for end items shall be classified as follows, except when an asterisk (*) appears, the defects shall be classified as major when seriously affecting serviceability or appearance and minor when affecting serviceability or appearance but not seriously.

Examine	Defect	Classification Major	(*)	Minor
Cord	Color combination or pattern not as specified	X		
	Not fabricated of specified material.	X		
	Spotted, stained or soiled		*	
	Has objectionable odor.		*	
	Core not completely covered.		*	
	Unevenly braided, not well rounded or not firm.		*	
	Cut or tear.		*	
	Broken, missing ends or picks		*	
	Frayed edges.		*	
	Twisted or distorted cord.		*	
	Pulled thread (s).		*	
	Cord other than required construction.	X		
Plaiting	Omitted.	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:02Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	(*)	Minor
	Not as shown on Figure 1.	X		
	Twenty-five or thirty-one plaits.			X
	Less than 25 or more than 31 plaits.	X		
	Unevenly or loosely plaited.		*	
Snap hook, fasteners, D ring, slide keepers	Scratches, pits, or dents noticeable from approximately 18 inch distance.		*	
	Evidence of corrosion.	X		
	Evidence that lacquer was not applied.	X		
	Lacquer not smooth, not continuous, or not adherent, i.e., flaking, blistering, bubbles, peeling or has run, sap or drops.		*	
	Foreign matter imbedded in finish, i.e., dust, lint.		*	
	Any discoloration.		*	
	Component malformed, fails to function properly.	X		
	Snap hook spring does not close fully, causing gap between spring and hook.	X		
	Any sharp edge or burr.	X		
	Fractured, split or broken.	X		
	Design not as specified.	X		
	Lip of each end of slide keeper not rounded.		*	

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:02Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	(*)	Minor
Assembly of parts	Any part missing (metal, yarn or cord).	X		
	Snap hook not attached to D ring at the long end of the lanyard.	X		
	Component insecurely attached e.g., cord loose in fastener.	X		
	Fastener not staked at two places into each cord.	X		
	The 1-inch sides of the fastener not rolled completely over the ends of the strands.			X
	Wrapped ends not neatly and tightly overwrapped.			X
	Less than 16 full turns of the slide cord overwrap.	X		
	Less than 20 and more than 16 full turns of the slide cord overwrap.			X
	Less than four or more than five full turns of slide cord overwrapping over the end of fastener.			X
	Overwrapping does not completely cover the cotton wrapping yarn.			X
	Both strands of cord not threaded through slide keeper(s)	X		
	D ring binds, i.e., does not rotate freely.			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:02Z
Check the source to verify that this is the current version before use.

4.5.3.2 Examination of dimensions. The finished lanyard shall be examined for defects in dimensions as specified in this specification. Any dimension that is not within the established tolerance shall be classified as a defect.

4.5.3.3 Inspection levels and AQL's. The inspection levels and AQL's expressed in defects per hundred units (DHU) shall be as follows:

Examination applicable to	Inspection level	AQL Major	AQL Total
4.5.3.1	II	2.5	6.5
4.5.3.2	S-2	(one lass)	4.0

4.5.4 Testing of the end item. Testing of the completely fabricated lanyard shall be performed in accordance with Table II for the characteristics shown. The sample unit shall be one completely fabricated lanyard. The inspection level shall be S-1 and the AQL shall be 6.5 DHU.

Table II. End item testing

Characteristics	Req. para.	Test method	Req. ind. unit	No. det. per S/unit	Results reported as:
Tackiness of lacquer	3.3.5	4.5.4.1	x	1	Pass or fail
Overall length	3.6	4.5.4.2	x	1	Pass or fail

4.5.4.1 Test for tackiness of lacquer. At room temperature, 60° to 80° F, press a piece of tissue paper against the lacquered metal part for 30 seconds, using any pressure capable of being exerted by the thumb and two fingers. The tissue paper shall not adhere to the metal part, but shall fall free when pressure is released.

4.5..4.2 Test for overall length. The finished lanyard shall not be stretched or tensioned prior to the length test. The finished lanyard shall be suspended vertically under a tension of 10 ounces and then measured to determine compliance with 3.6.

4.5.5 Inspection for preparation for delivery. An examination shall be made to determine compliance with packaging, packing and marking requirements of Section 5. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. Examination for defects of closure listed below shall be examined on

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:02Z
Check the source to verify that this is the current version before use.

shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 DHU.

Examine	Defect
Markings (exterior and interior)	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.
Materials	Any component missing. Any component damaged affecting serviceability.
Workmanship	Inadequate application of components, such as incomplete closure of container flaps, loose strapping, inadequate stapling. Bulging or distortion of container.
Content	Number of packages per container is more or less than required. Gross/net weight exceeds requirements.

5. PACKAGING

5.1 Preservation-packaging. Preservation-packaging shall be level A or commercial as specified (see 6.2).

5.1.1 Level A. The plaited sections of the lanyard shall be folded in half by bringing the brass slide keepers together. The remainder shall then be given sufficient additional folds to permit individual packaging in a two piece full-telescope style set-up box, or in a folding style box, of the following outside dimensions set-up box cover included: 7-13/16 inches in length, 2-1/4 inches in width, and 1-3/4 inches in height. Any grade or finish of boxboard of not less than 0.045 inch in thickness for the set-up box and of not less than 0.030 inch in thickness for the folding box may be used. The set-up box shall be plain stayed with not less than 60 pounds basis weight kraft paper stays.

5.1.2 Commercial. Lanyards shall be packaged in accordance with industry's practice.

5.2 Packing. Packing shall be level A, B or commercial as specified (see 6.2).

5.2.1 Level A.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:02Z
Check the source to verify that this is the current version before use.

5.2.1.1 Method 1. Forty (40) lanyards, packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to weather resistant class, size 1 of MIL-B-17757, The container shall be assembled, closed and reinforced in accordance with the appendix thereto.

5.2.1.2 Method 2. When specified (see 6.2), 12 level B shipping containers, 480 lanyards, shall be packed in a fiberboard shipping container, conforming to class weather resistant, size 4 of MIL-B-17757 and assembled, closed, and strapped in accordance with the appendix thereto.

5.2.2 Level B. Forty (40) lanyards, packaged as specified in 5.1, shall be packed in a fiberboard shipping container, conforming to domestic class, size 1A of MIL-B-17757. The fiberboard used in fabricating the boxes shall be grade 275. The container shall be closed and assembled in accordance with the appendix thereto.

5.2.3 Commercial. Lanyards, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination. Containers shall be in accordance with U. S. Postal Service Manual, National Motor Freight classification and Uniform Freight Classification Rules, as applicable.

5.3 Marking. Unit and shipping containers shall be marked in accordance with the requirements of MIL-STD-129.

6. NOTES

6.1 Intended use. The lanyard, pistol and whistle is a component of the military police equipment.

6.2 Ordering data. Purchasers should exercise any desired options offered herein, and procurement documents should specify the following:

6.2.1 Procurement requirements.

(a) Title, number and date of this specification.
(b) First article (see 3.2, 4.2 and 6.4).
(c) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
(d) When level A, method 2 packing is required (see 5.2.1.2).

6.2.2 Data requirements. Data conforming to Data Item Descriptions DI-R-4803, DI-R-4805, DI-T-4901, DI-T-4902, DI-T-4903 and DI-T-4904 will usually be required for delivery in connection with this specification. When so required, such data will be specified for delivery on a DD Form 1423 included in the contract.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:02Z
Check the source to verify that this is the current version before use.


6.3 Standard samples and shade samples. For information regarding the availability of standard samples and samples of shades specified, address inquiry to the procuring activity issuing the invitation for bids.

6.4 First article. First article examination, test and approval shall be specified by the contracting officer (see 3.2).

6.5 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

Preparing activity:
Navy - MC
Project No. 8465-N760

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:02Z
Check the source to verify that this is the current version before use.

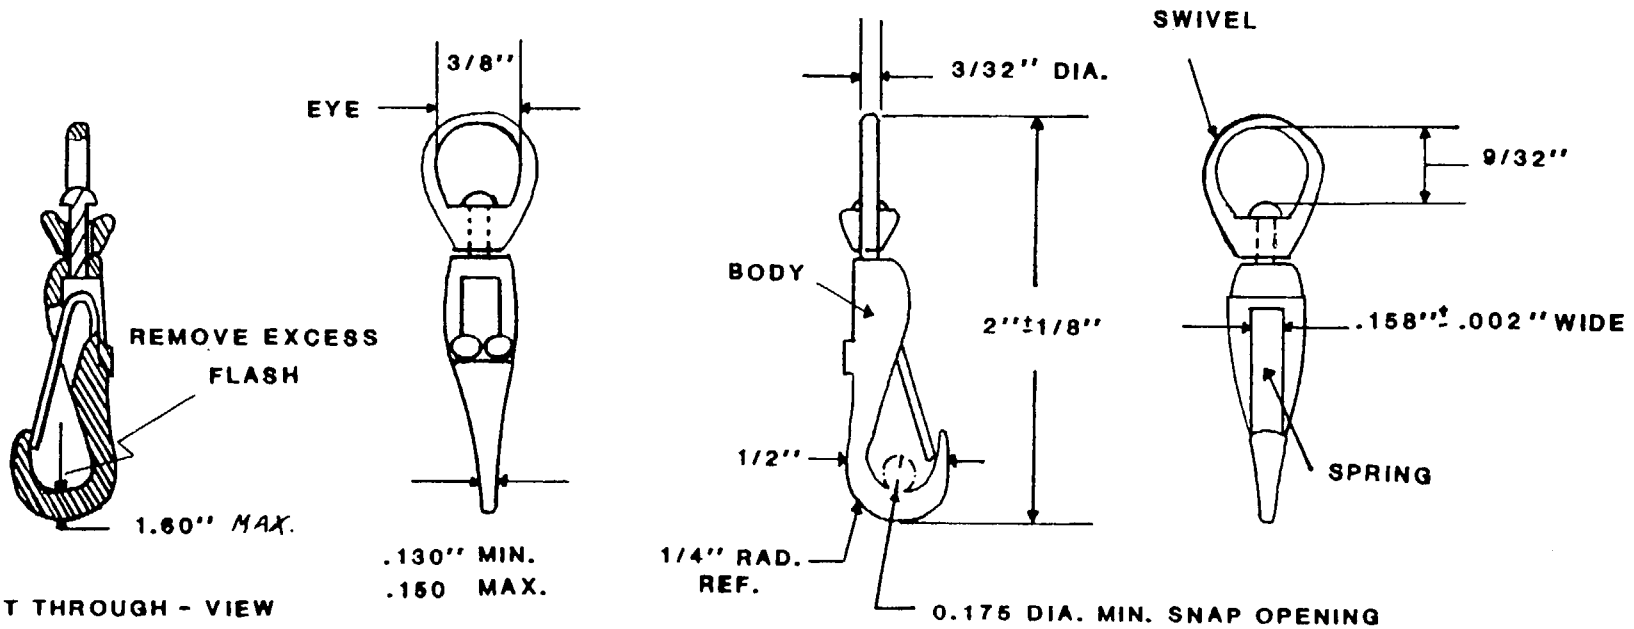

SIZE OF EYE-3/8"

LENGTH OVERALL-2" PLUS OR MINUS-1/8"

RING SIZE SNAP OPENING-.175" MIN.

SPRING: WIDTH-.158"±.002 , THICKNESS-.020"±.005"

SNAPHOOK, SVIVELEYE

TOLERANCES: ± 1/32" UNLESS OTHERWISE SHOWN

FIGURE 1. LANYARD, PISTOL AND WHISTLE; RAYON AND COTTON CORD ; SCARLET AND GOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:02Z
Check the source to verify that this is the current version before use.

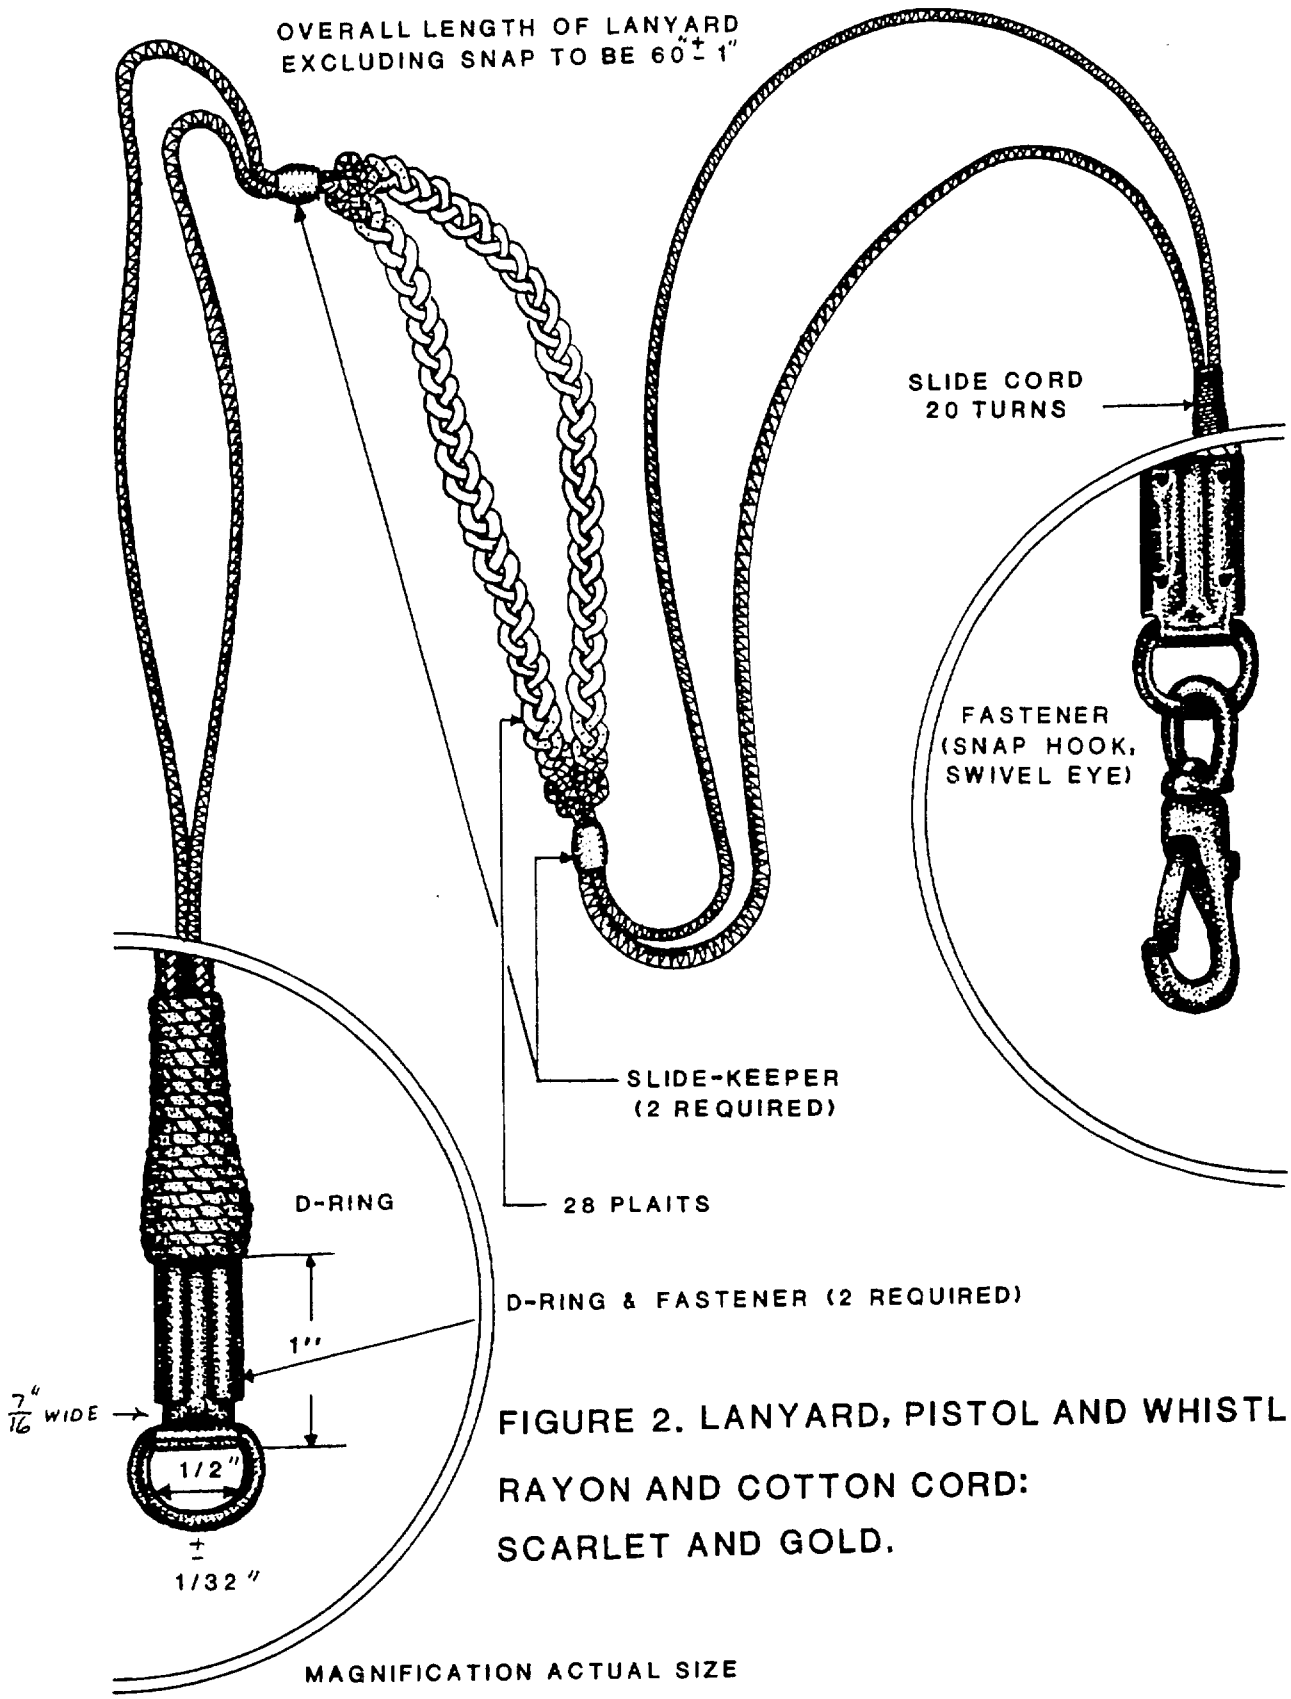


FIGURE 2. LANYARD, PISTOL AND WHISTLE: RAYON AND COTTON CORD: SCARLET AND GOLD.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:02Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:02Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1426 1 OCT 76

EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:02Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID



OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commandant of the Marine Corps
Headquarters Marine Corps
(Code LMO-1)
Washington, D. C. 20380

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:02Z
Check the source to verify that this is the current version before use.