INCH-POUND
A-A-59125/11
26 September 1997
SUPERSEDING
MIL-T-55164/11A
21 November 1988

COMMERCIAL ITEM DESCRIPTION SHEET

TERMINAL BOARDS, MOLDED, BARRIER STUD TYPE, CLASS 5TB

The General Services Administration has authorized the use of this commercial item description (CID) as a replacement for Class 5TB of MIL-T-55164/11 for all federal agencies.

The requirements for acquiring the product described herein shall consist of this sheet and CID A-A-59125.

REQUIREMENTS:

Dimensions and configuration: see Figure 1.

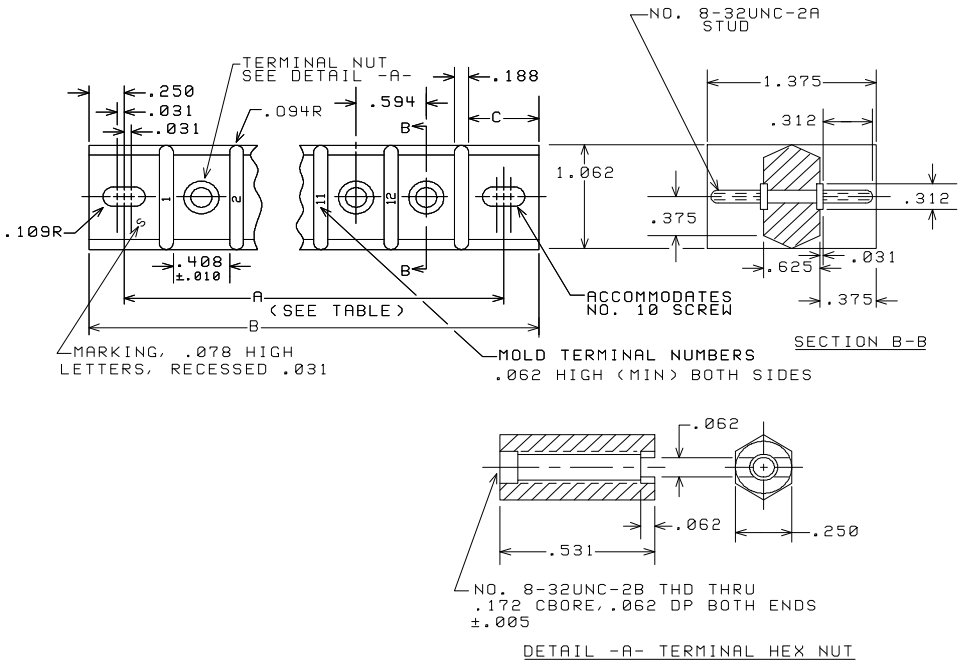

Figure 1. Terminal Board.

AMSC N/A FSC 5940

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:02Z
Check the source to verify that this is the current version before use.

Table I. Dimensions.

Type Designation	Dimensions			Terminal nuts required
	A	B	C	
5TB8	5.625	6.125	0.594	16
5TB10	6.875	7.375	0.625	20
5TB12	8.000	8.500	0.594	24

Terminal Board class 5TB: single rows, single feed through, stud type.

NOTES:

1. Dimensions are in inches.
2. Tolerances on terminal boards up to and including 6 inches in length:
   Dimension “A” + 0.031 to - 0.016
   Dimension “B” + 0.031 to - 0.062
3. Tolerances on terminal boards over 6 inches in length:
   Dimension “A” + 0.047 to - 0.031
   Dimension “B” + 0.047 to - 0.062
4. The drawing depicts only general design characteristics and is not intended to limit specific manufacturing processes.
5. The maximum number of terminal lugs for each stud: 4.
6. Studs shall be threaded to within 0.046 inch of the stud shoulder.

Dielectric withstanding voltage: 2,200 volts rms.
Voltage rating (maximum) : 600 volts.
Current rating: 50 amps.

MILITARY INTERESTS:

Custodian:
Army - CR
Navy - AS
Air Force - 85

Reviewer:
DLA - GS

CIVIL AGENCY COORDINATING ACTIVITY:

GSA-7FXE

Preparing activity:
Army - CR

(Project No. 5940-1192-10)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:02Z
Check the source to verify that this is the current version before use.