INCH-POUND
A-A-59125/23
26 September 1997
SUPERSEDING
MIL-T-55164/23C
21 November 1988

COMMERCIAL ITEM DESCRIPTION SHEET

TERMINAL BOARDS, MOLDED, BARRIER STUD TYPE, CLASS 25TB

The General Services Administration has authorized the use of this commercial item description (CID) as a replacement for Class 25TB of MIL-T-55164/23 for all federal agencies.

The requirements for acquiring the product described herein shall consist of this sheet and CID A-A-59125.

REQUIREMENTS:

Dimensions and configuration: see Figure 1.

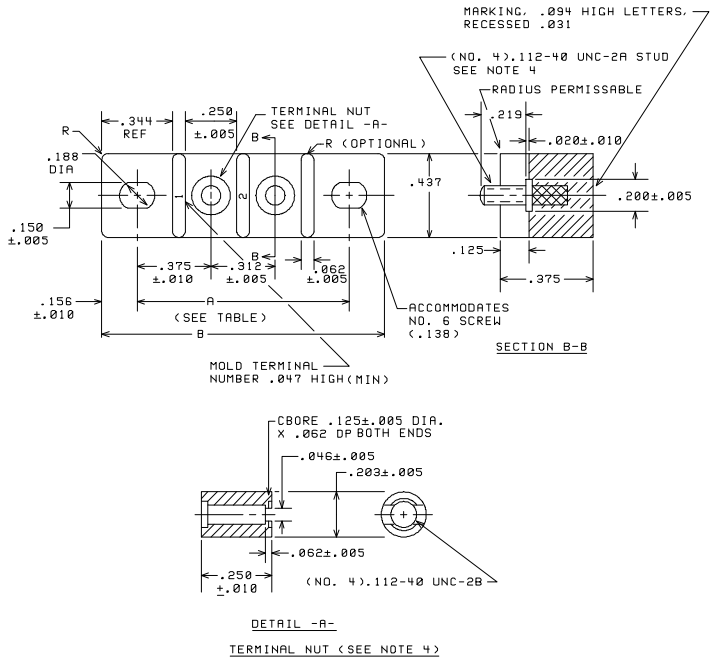

Figure 1. Terminal Board.

AMSC N/A FSC 5940

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:02Z
Check the source to verify that this is the current version before use.

Table I. Dimensions.

Type Designation	Dimensions		Terminal nuts Required
	A	B	
25TB2	1.062	1.375	2
25TB5	2.000	2.312	5
25TB6	2.312	2.625	6
25TB7	2.625	2.938	7
25TB9	3.250	3.562	9
25TB10	3.562	3.875	10
25TB12	4.188	4.500	12

Terminal Board class 25TB: single front, stud type.

NOTES:

1. Dimensions are in inches.
2. Tolerances on terminal boards:
   Dimension “A” + 0.031 to - 0.031
   Dimension “B” + 0.031 to - 0.062
3. The drawing depicts only general design characteristics and is not intended to limit specific manufacturing processes.
4. The maximum number of terminal lugs for each stud: 4.
5. Studs shall be threaded to within 0.046 inch of the stud shoulder.

Dielectric withstanding voltage: 1,600 volts rms.
Voltage rating (maximum) : 300 volts.
Current rating: 25 amps.

MILITARY INTERESTS:

Custodian:
Army - CR
Navy - AS
Air Force - 85

Reviewer:
DLA - GS

CIVIL AGENCY COORDINATING ACTIVITY:

GSA-7FXE

Preparing activity:
Army - CR

(Project No. 5940-1192-22)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:02Z
Check the source to verify that this is the current version before use.