MILITARY SPECIFICATION SHEET

CRIMPING TOOLS, TERMINAL, HAND, WIRE TERMINATION FOR CONNECTORS, ELECTRICAL, FLAT CABLE (TYPE 2)

This specification is approved for use by the Department of the Air Force, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the crimping tools described herein shall consist of this specification and the latest issue of MIL-C-22520.


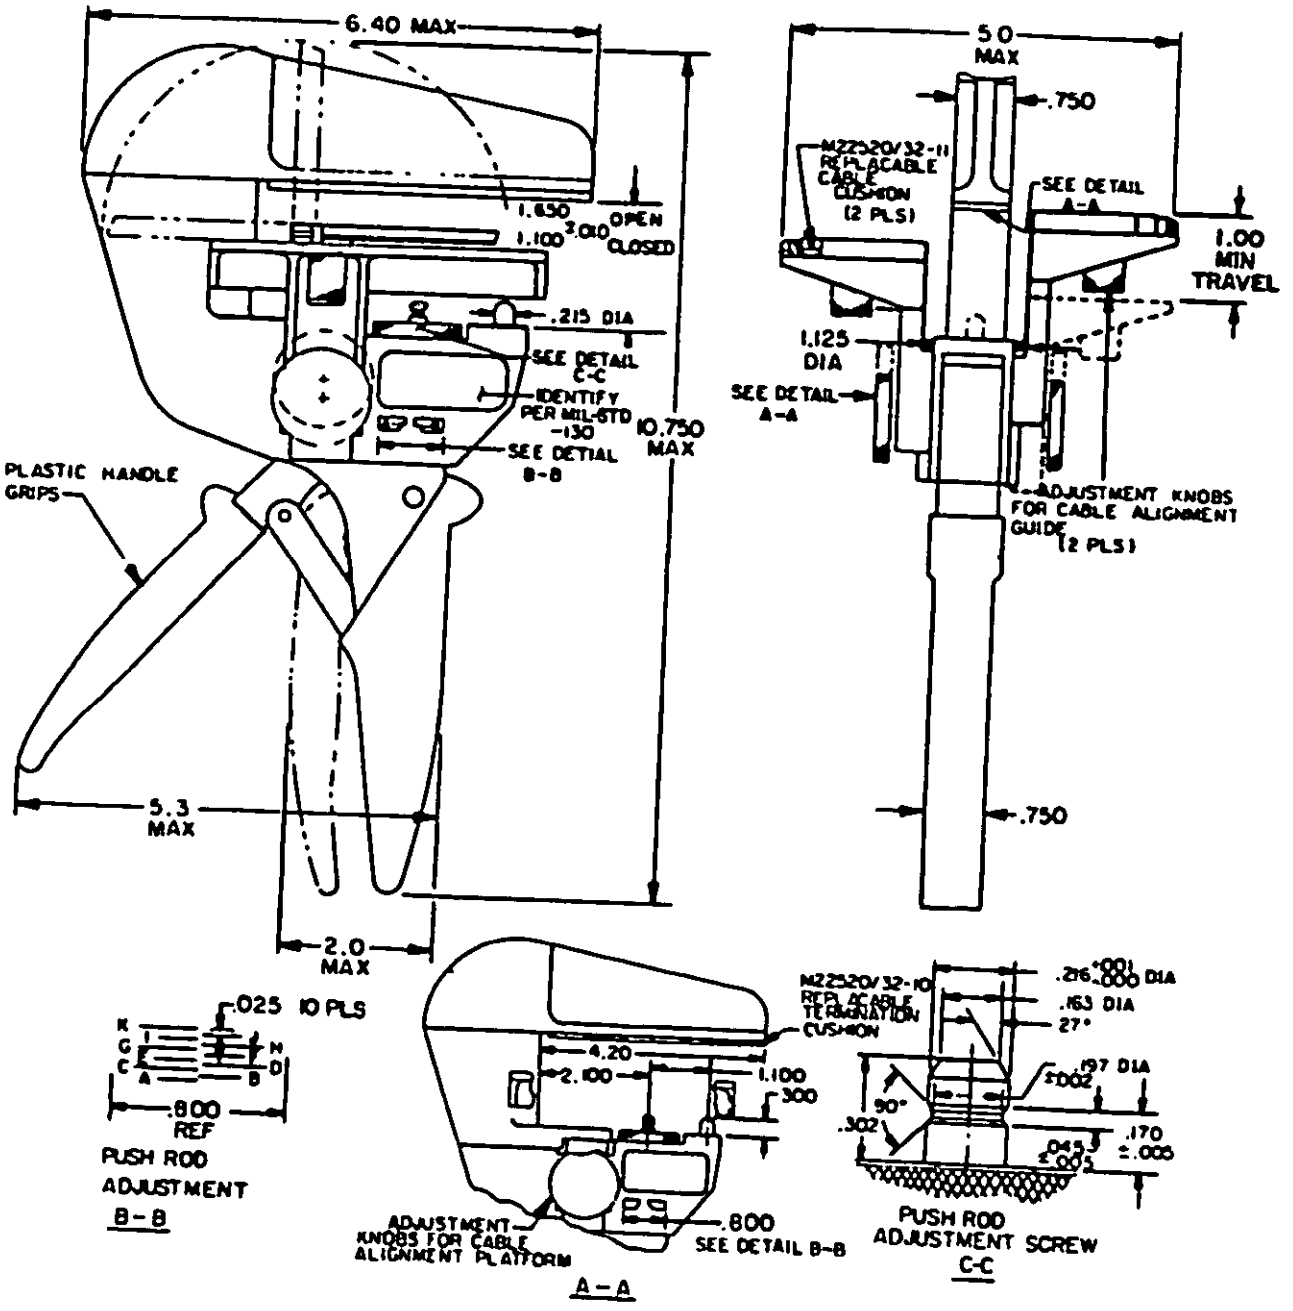


FIGURE 1. Basic tool.

FSC 5120

Source: https://assist.dla.mil -- Downloaded: 202610-19T12:48Z
Check the source to verify that this is the current version before use.

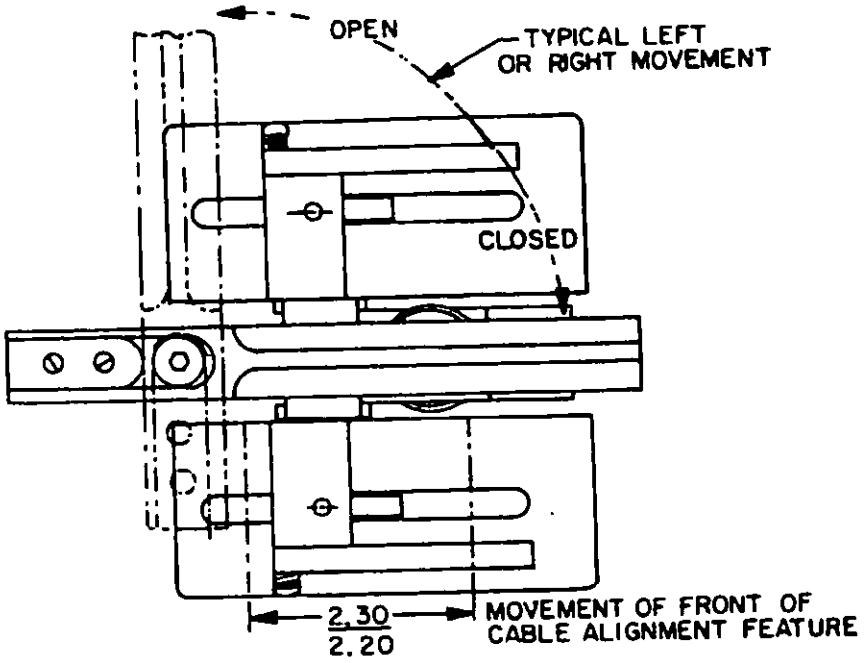


NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.010 (.25 mm).
4. Tolerance is non-cumulative.
5. Outline configuration optional within maximum dimensions shown.

INCHES	MM
.001	.03
.002	.05
.005	.127
.025	.635
.045	1.143
.163	4.140
.170	4.318
.197	5.004
.215	5.461
.216	5.486
.300	7.620
.302	7.671

INCHES	MM
.550	13.970
.750	19.050
.800	20.320
1.100	27.940
1.125	28.575
1.650	41.910
2.0	50.800
2.100	53.340
2.20	55.88
2.30	58.42
4.200	106.680
5.0	127.0
5.30	134.620
6.40	162.560
10.750	273.05

FIGURE 1. Basic tool - Continued.


Source: https://assist.dla.mil -- Downloaded: 202610-19T12:48Z
Check the source to verify that this is the current version before use.

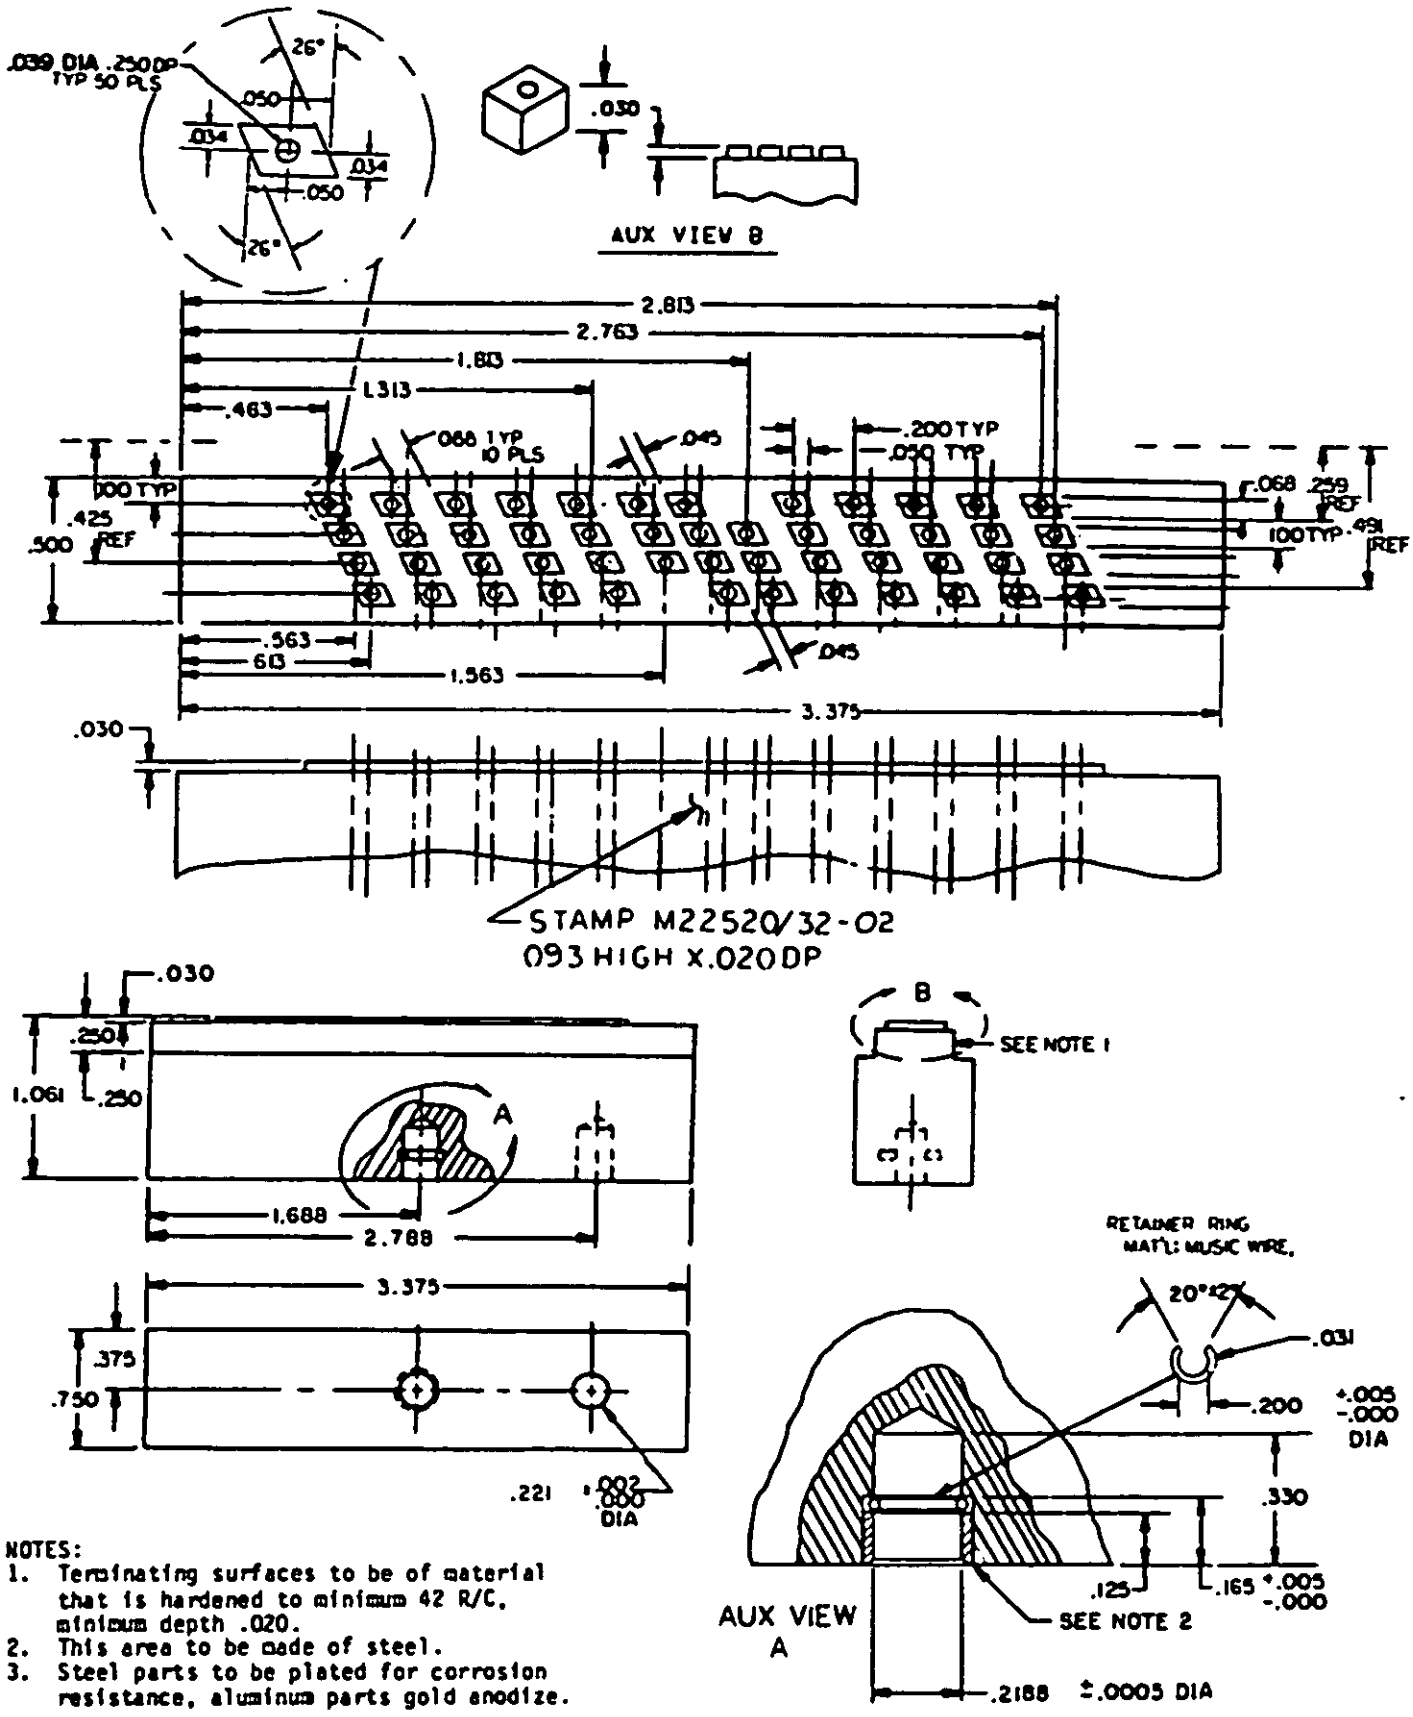

NOTES:
1. Terminating surfaces to be of material that is hardened to minimum 42 R/C, minimum depth .020.
2. This area to be made of steel.
3. Steel parts to be plated for corrosion resistance, aluminum parts gold anodize.

FIGURE 2. Terminating die M22520/32-02.


Source: https://assist.dla.mil -- Downloaded: 202610-19T12:48Z
Check the source to verify that this is the current version before use.

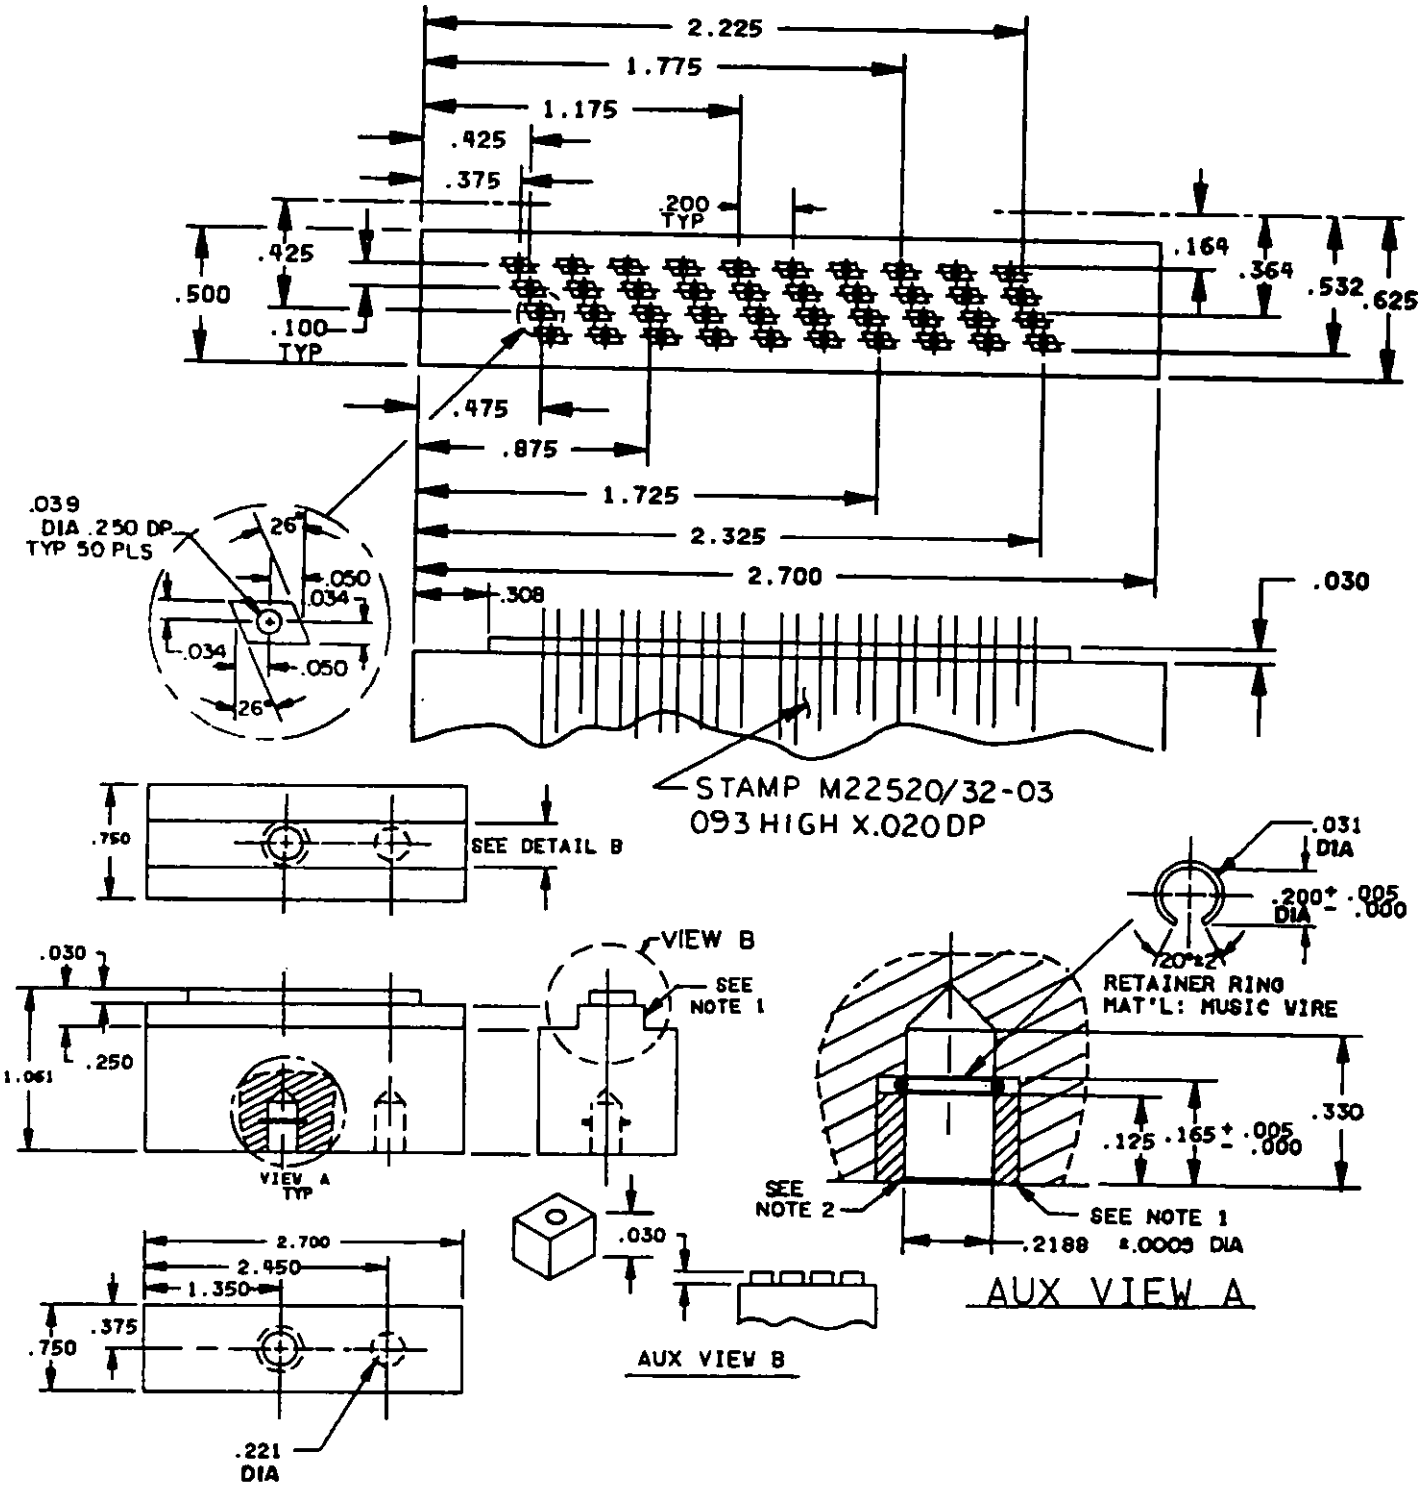

NOTES:
1. Terminating surfaces to be of material that is hardened to minimum 42 R/C, minimum depth .020.
2. Steel parts to be plated for corrosion resistance, aluminum parts gold anodize.

FIGURE 3. Terminating die M22520/32-03.


Source: https://assist.dla.mil -- Downloaded: 202610-19T12:48Z
Check the source to verify that this is the current version before use.

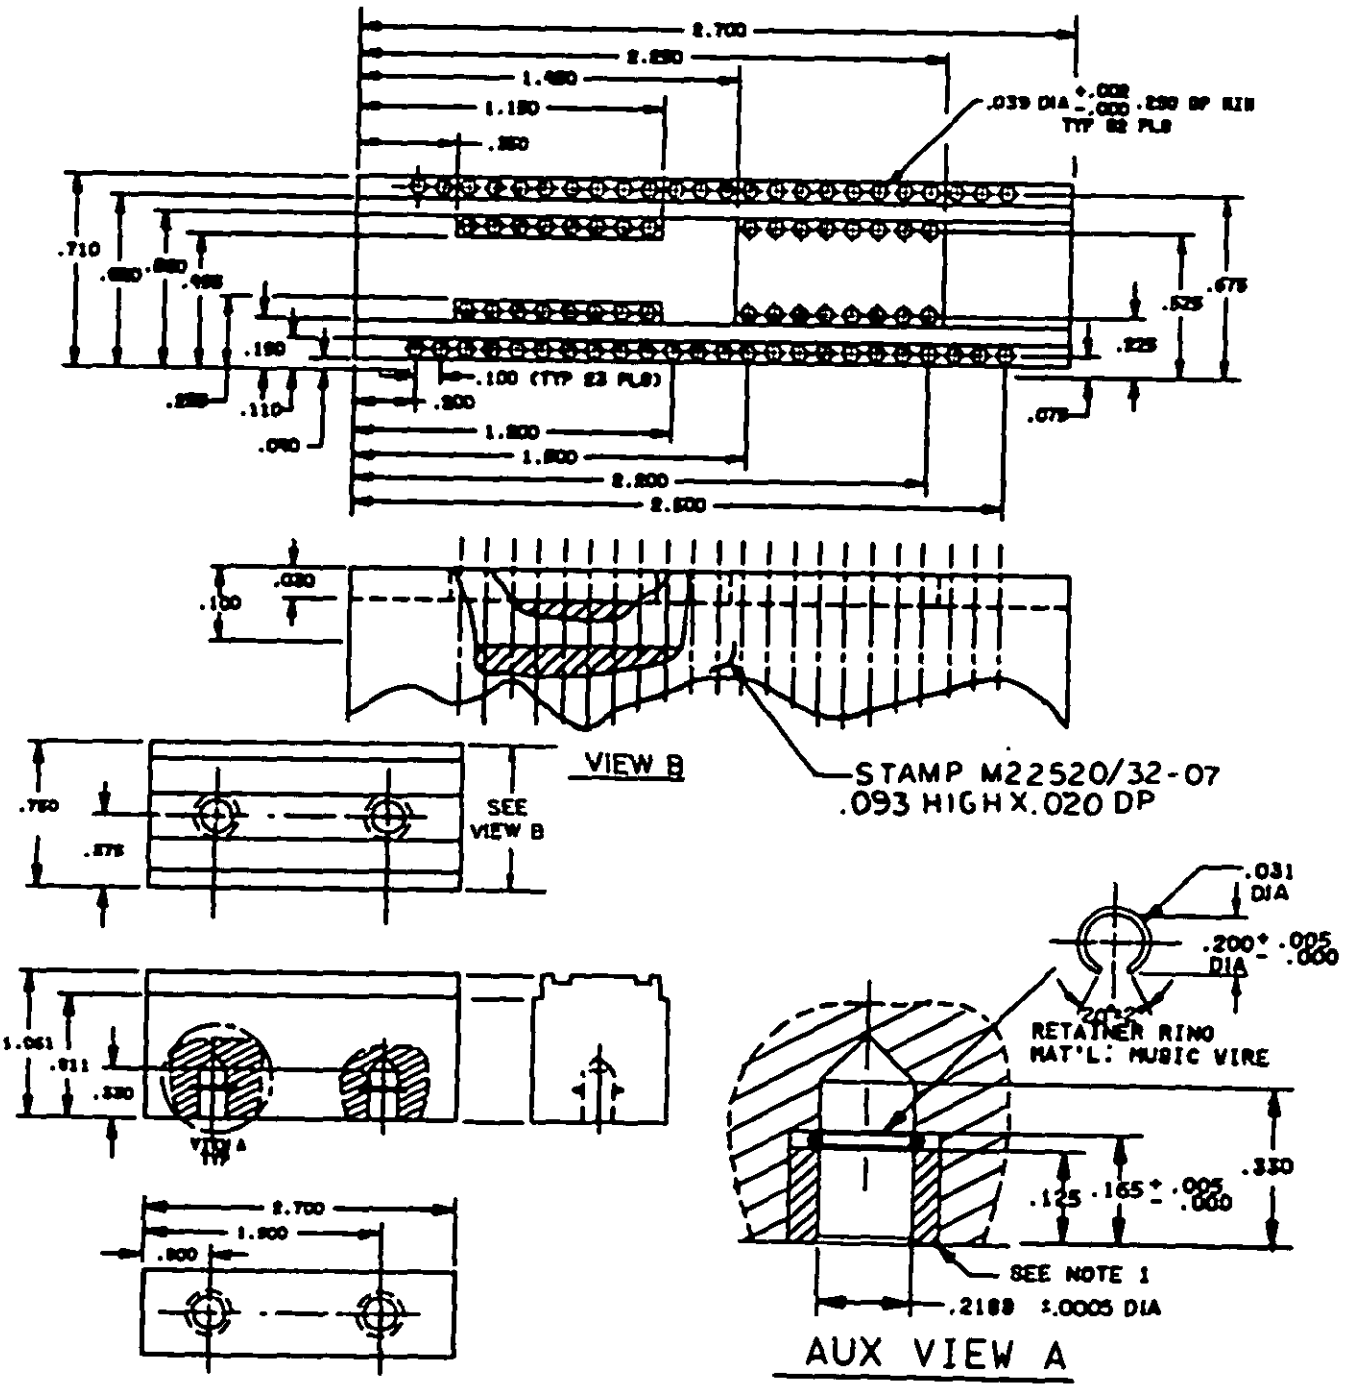

NOTES:
1. Steel parts to be plated for corrosion resistance, aluminum parts gold anodize.

FIGURE 4. Terminating die M22520/32-07.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:48Z
Check the source to verify that this is the current version before use.

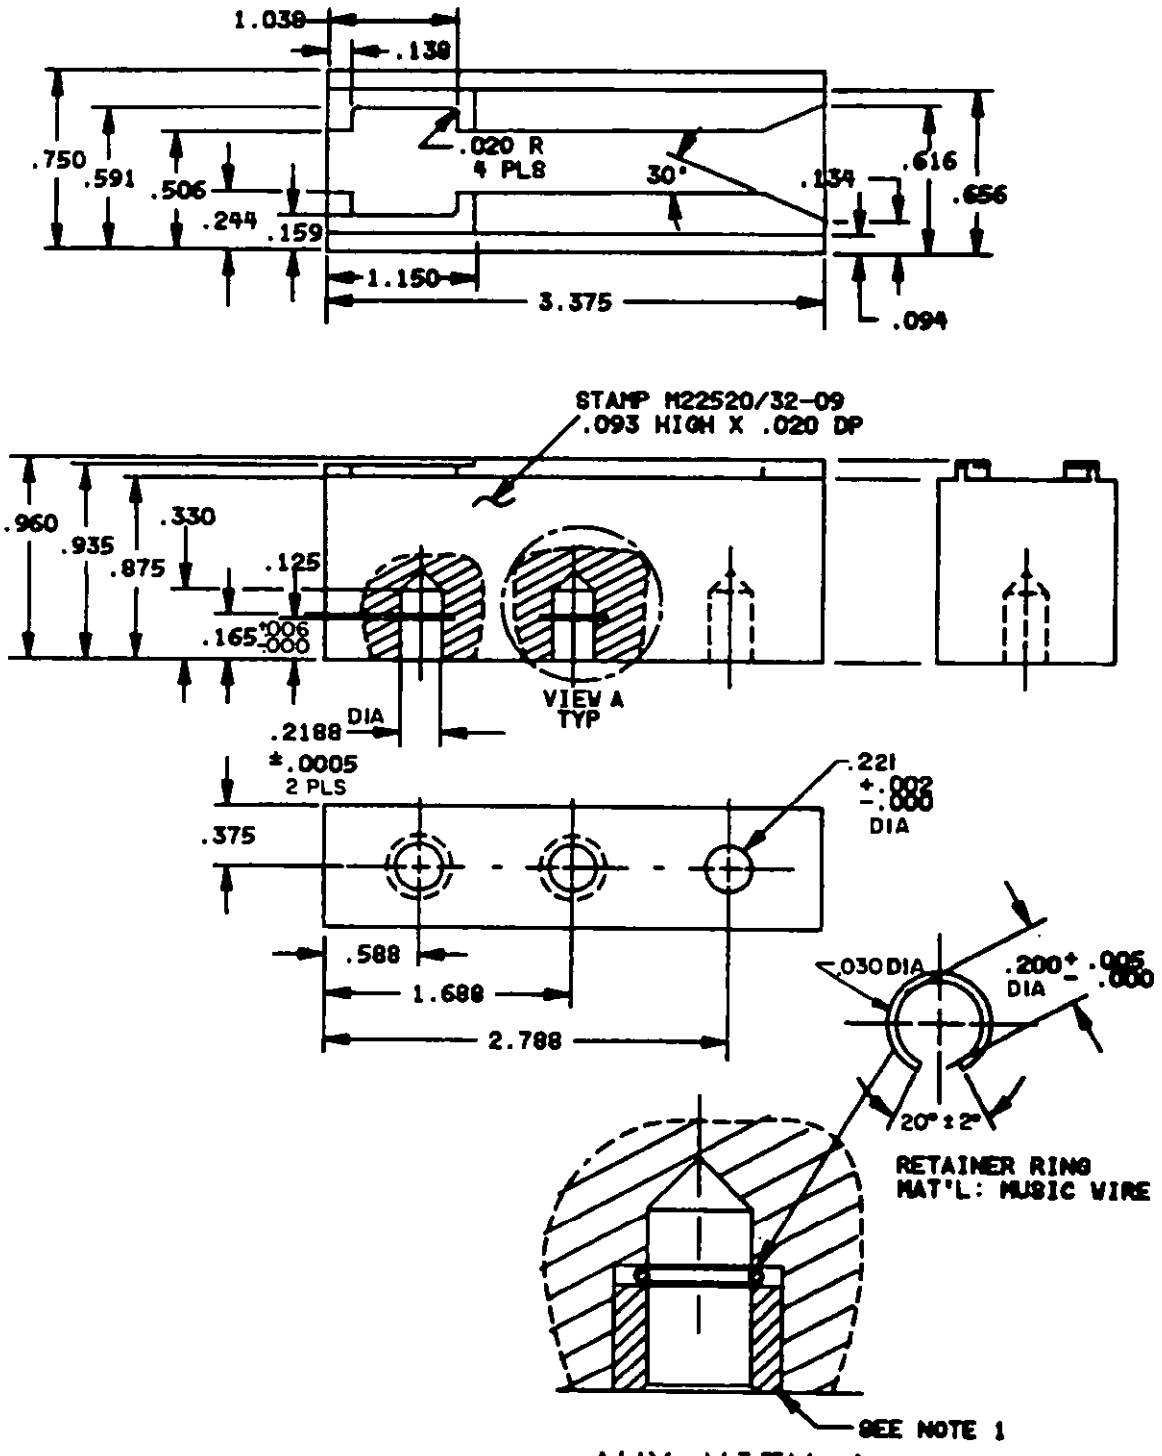

NOTES:
1. This area to be made of steel.
2. Steel parts to be plated for corrosion resistance, aluminum parts gold anodize.

FIGURE 5. Terminating die M22520/32-09.

Source: https://assist.dla.mil -- Downloaded: 202610-19T12:48Z
Check the source to verify that this is the current version before use.

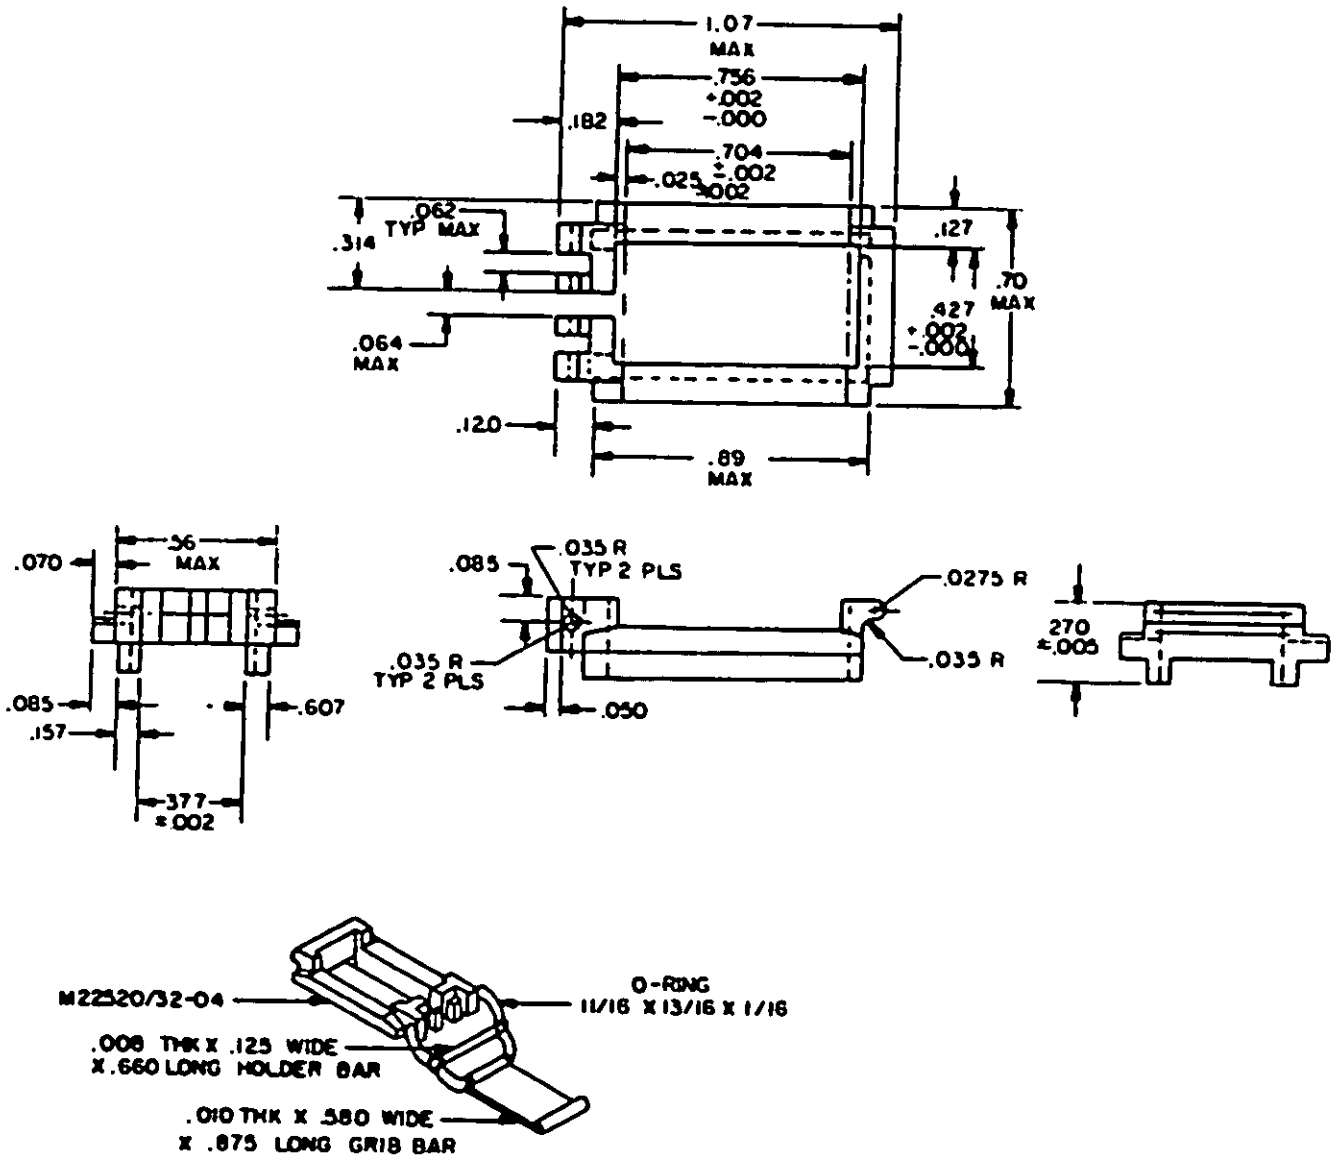


FIGURE 6. Connector holder M22520/32-04.

Source: https://assist.dla.mil -- Downloaded: 202610-19T12:48Z
Check the source to verify that this is the current version before use.

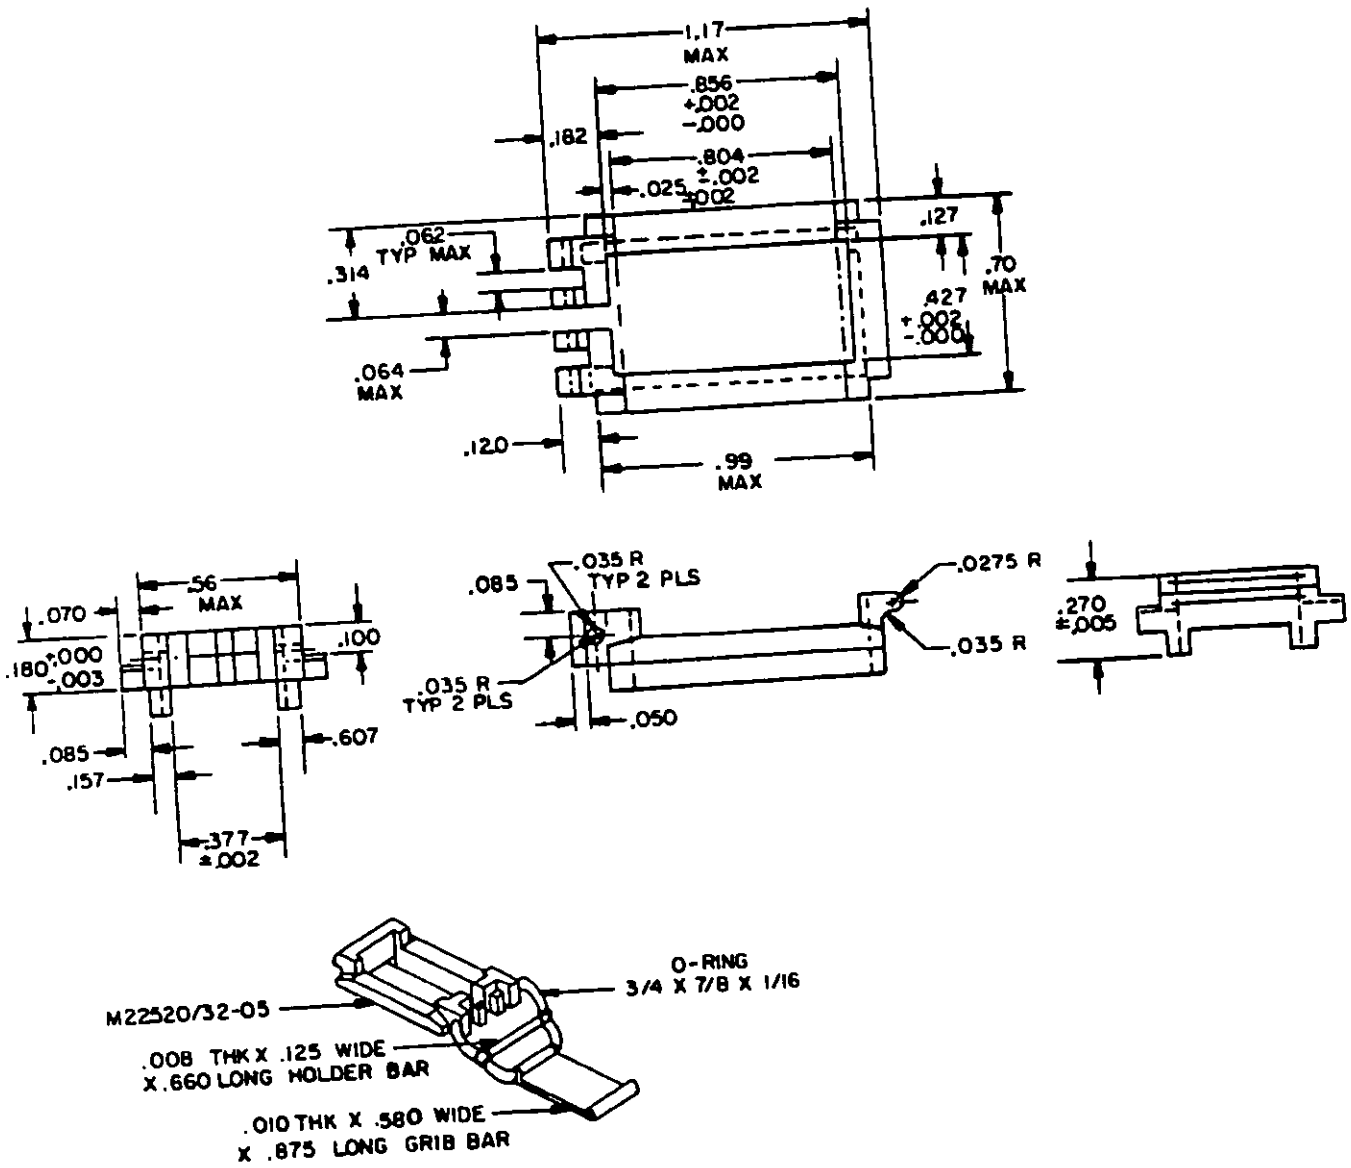


FIGURE 7. Connector holder M22520/32-05.

Source: https://assist.dla.mil -- Downloaded: 202610-19T12:48Z
Check the source to verify that this is the current version before use.


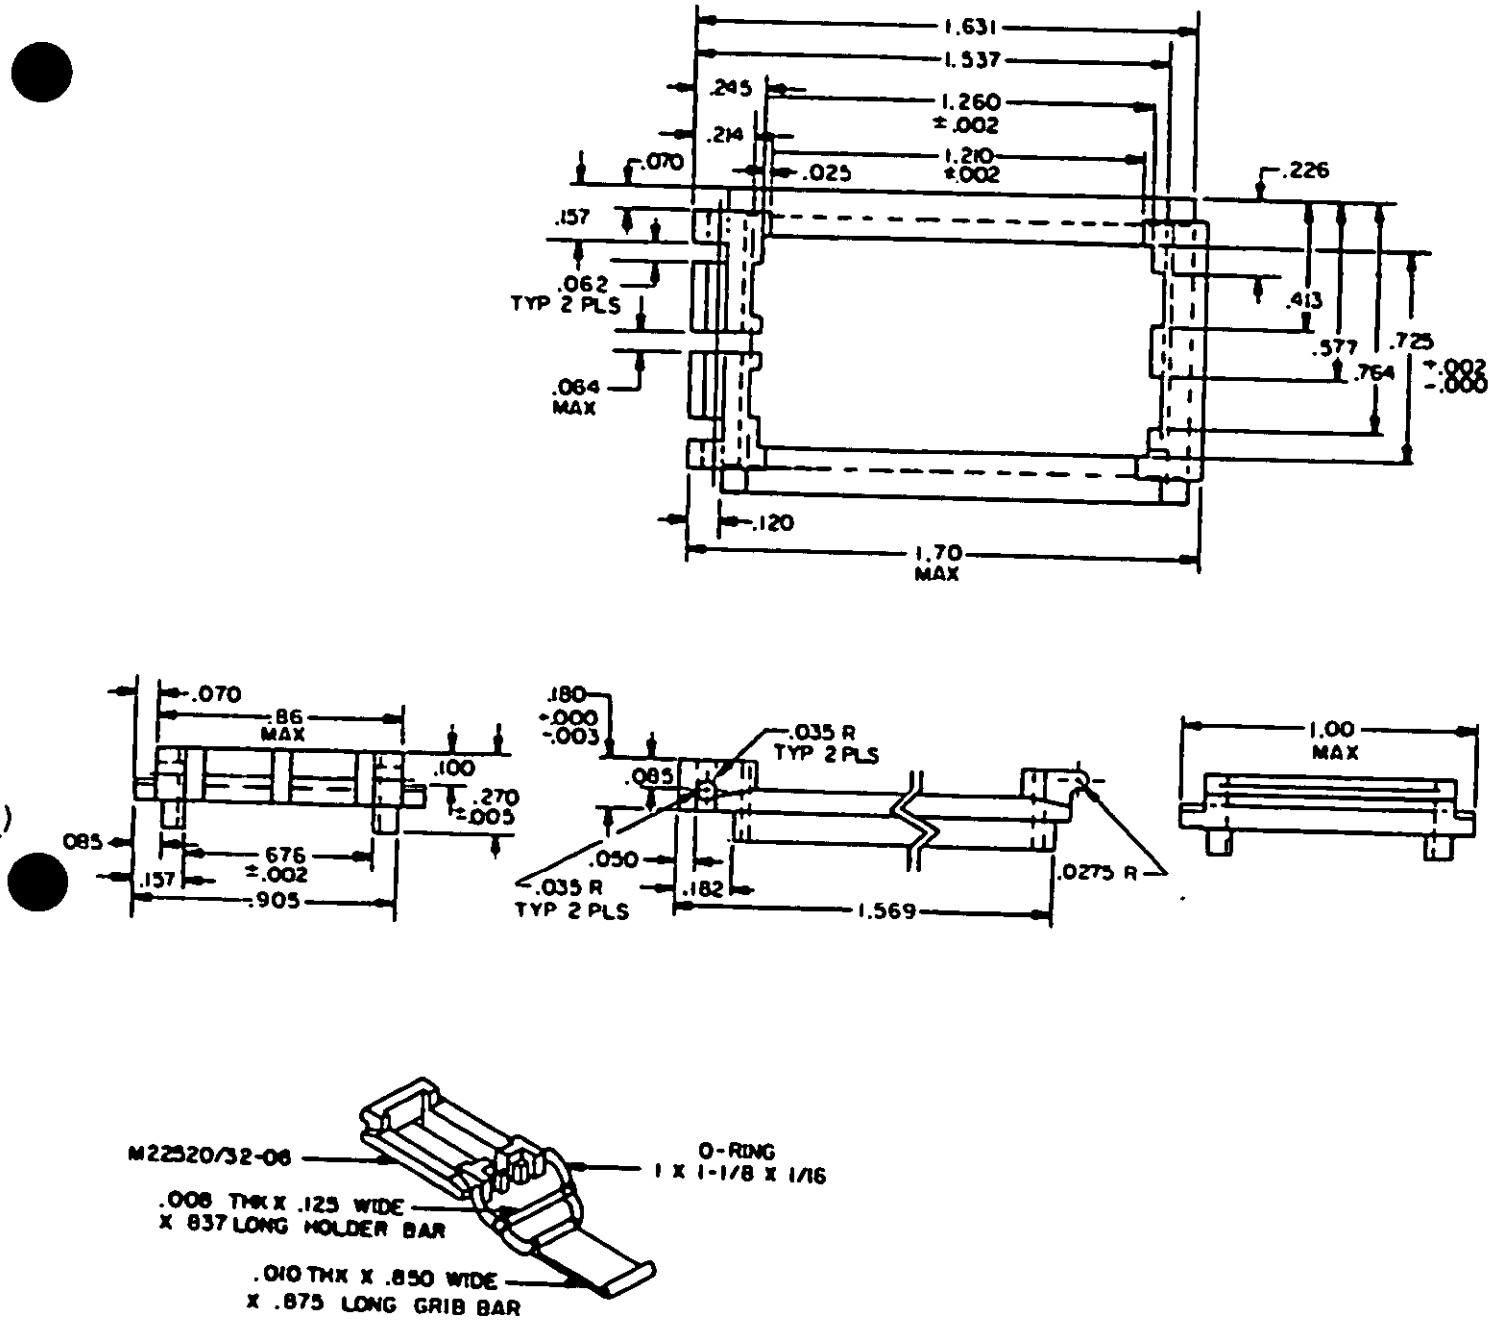


FIGURE 8. Connector holder M22520/32-06.


Source: https://assist.dla.mil -- Downloaded: 202610-19T12:48Z
Check the source to verify that this is the current version before use.

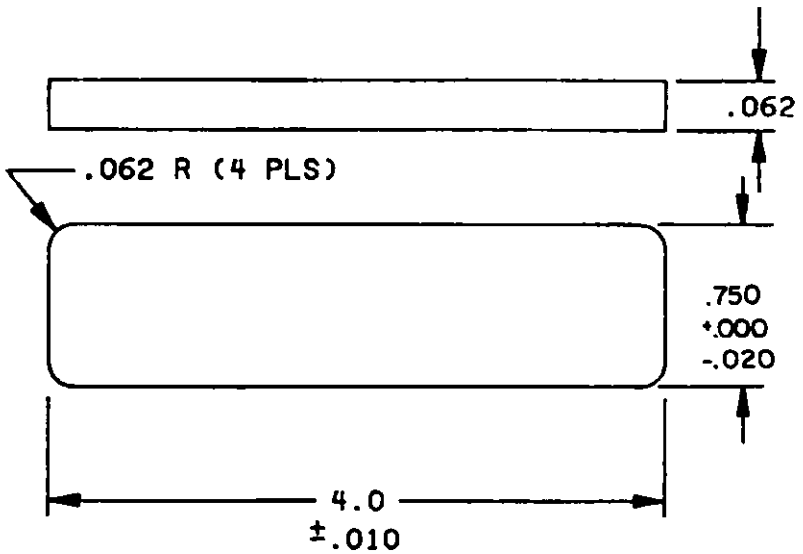

Material: Urathane
Armstrong part no.
P0650 (or equivalent)
Shore-A Durometer 74 to 88.

FIGURE 9. Replaceable termination cushion M22520/32-10.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:48Z
Check the source to verify that this is the current version before use.

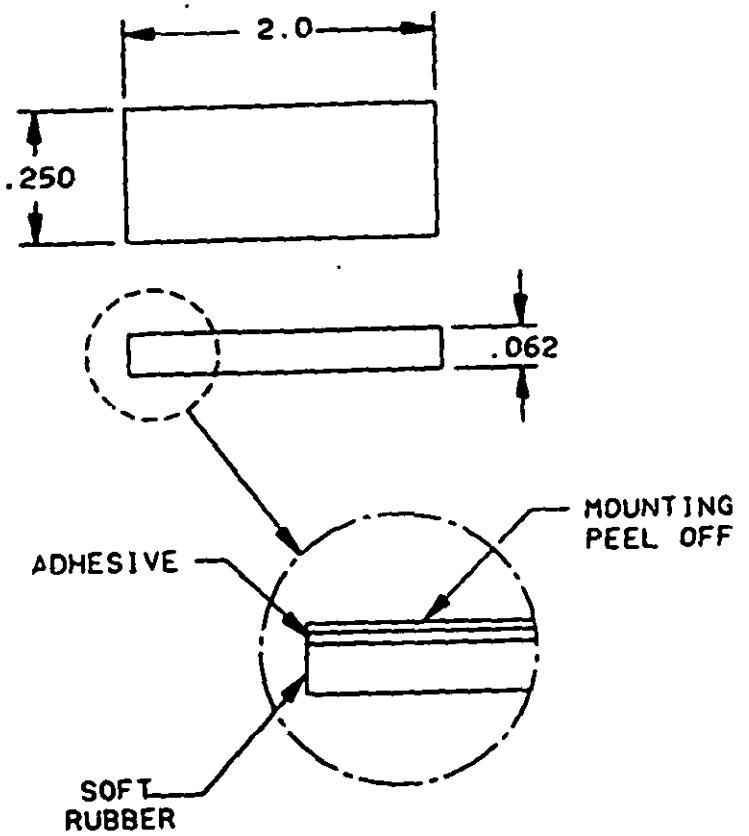

NOTES:
1. Use 3M one side stick weather strip. (or equivalent)
2. 2 required per assembly 4 X 1.

FIGURE 10. Replaceable cable cushion M22520/32-11.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:48Z
Check the source to verify that this is the current version before use.

TABLE I. Die/connector usage.

Terminating die	Connectors
M22520/32-02	M83503/23-01
	-02
	-05
	-06
	-07
	-08
	-11
	-12
M22520/32-03	M83503/23-03
	-04
	-09
	-10
M22520/32-07	M83503/6 -01
	-02
	-03
	-04
	-05
	-07
	-08
M22520/32-09	M83503/7 -01
	-02
	-03
	-04
	-05
	-06
	-07
	-08
	-09
	-10
	-11
	-12
M22520/32-09	M83503/22-01
	-02
	-03
	-04
	-05
	-06

REQUIREMENTS:

Dimensions and configurations: See figures 1 through 10.

Compression force: Shall be performed using 28 AWG stranded conductor flat cable of the highest number of conductors compatible with MIL-C-83503 connectors. Compression force shall not exceed 75 pounds.

Weight: Weight of the basic tool shall not exceed 2.5 pounds.

Gages: Not applicable.

Wire size: In accordance with MIL-C-83503.

Ratchet: Not applicable.

Ratcheting mechanism: Not applicable.

Deformation of crimped connection: Not applicable.

Axial concentricity: Not applicable.

Tensile strength: Not applicable.

Dielectric strength: Shall meet the requirements of MIL-C-83503.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:48Z
Check the source to verify that this is the current version before use.

High compression force: Not applicable.

Cracking of crimped connection: Not applicable.

Low temperature crimp: Not applicable.

Operator instructions: Shall be supplied with tool.

Part numbers: M22520/32- see figures 2 through 10.

Intended use: Designed for terminating flat cable connectors specified in MIL-C-83503.

Custodian:
Air Force - 85

Review activities:
Air Force - 12, 17, 84, 99
DLA - ES

Preparing activity:
Air Force - 85

(Project 5120-F841)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:48Z
Check the source to verify that this is the current version before use.