MILITARY SPECIFICATION SHEET

CRIMPING TOOLS, TERMINAL, HAND, WIRE TERMINATION, FOR CRIMP TYPE REMOVABLE CONTACTS FOR MIL-C-28840 CONNECTORS

This specification sheet is approved for use within the Space and Naval Warfare Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the crimping tools described herein shall consist of this specification and the latest issue of MIL-C-22520.


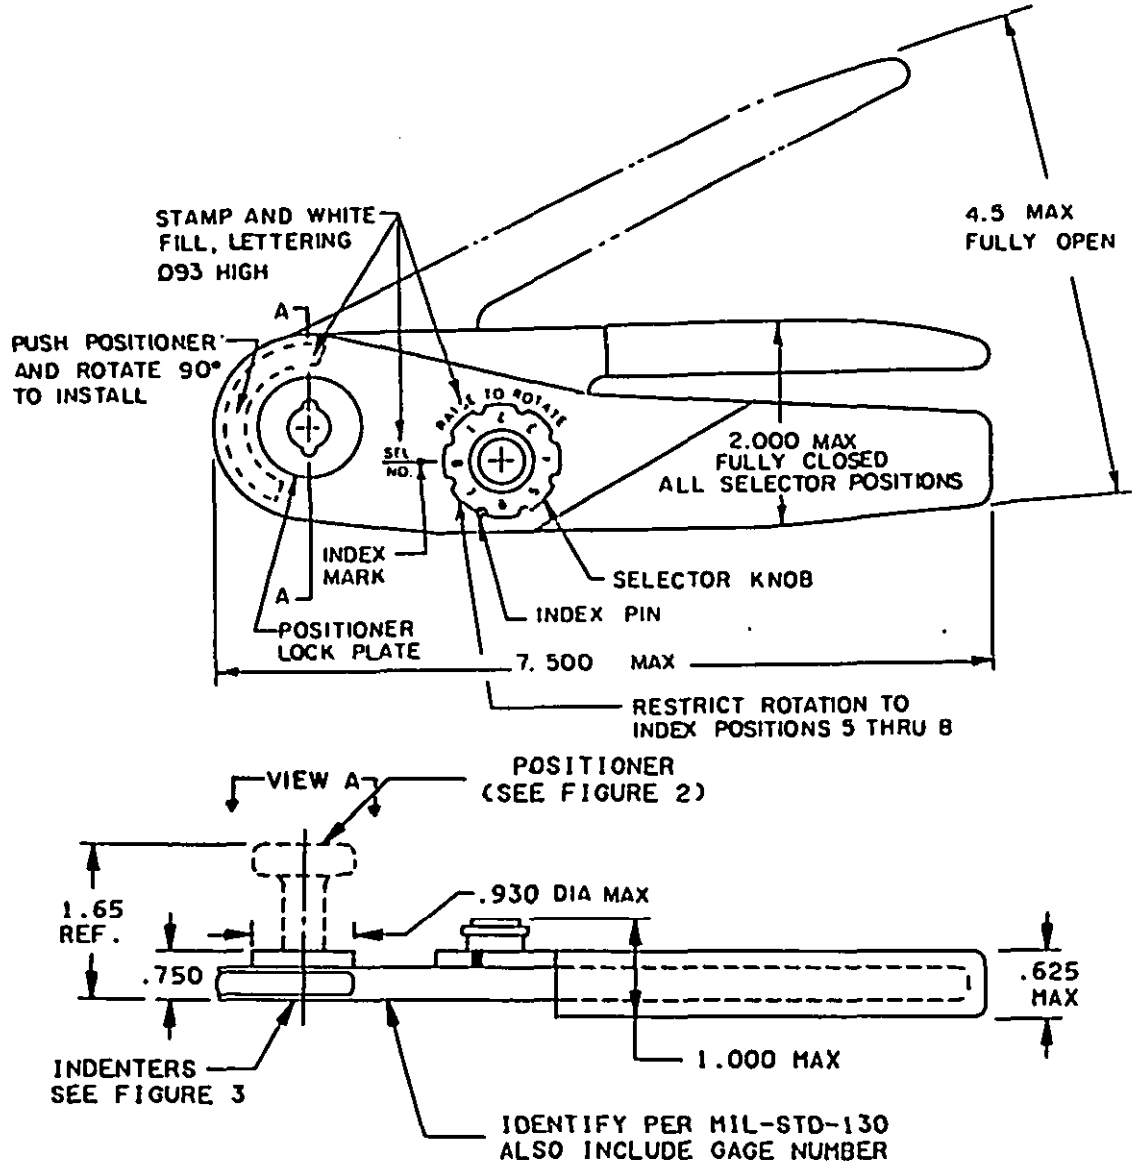


FIGURE 1. Minature adjustable crimp tool.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:49Z
Check the source to verify that this is the current version before use.

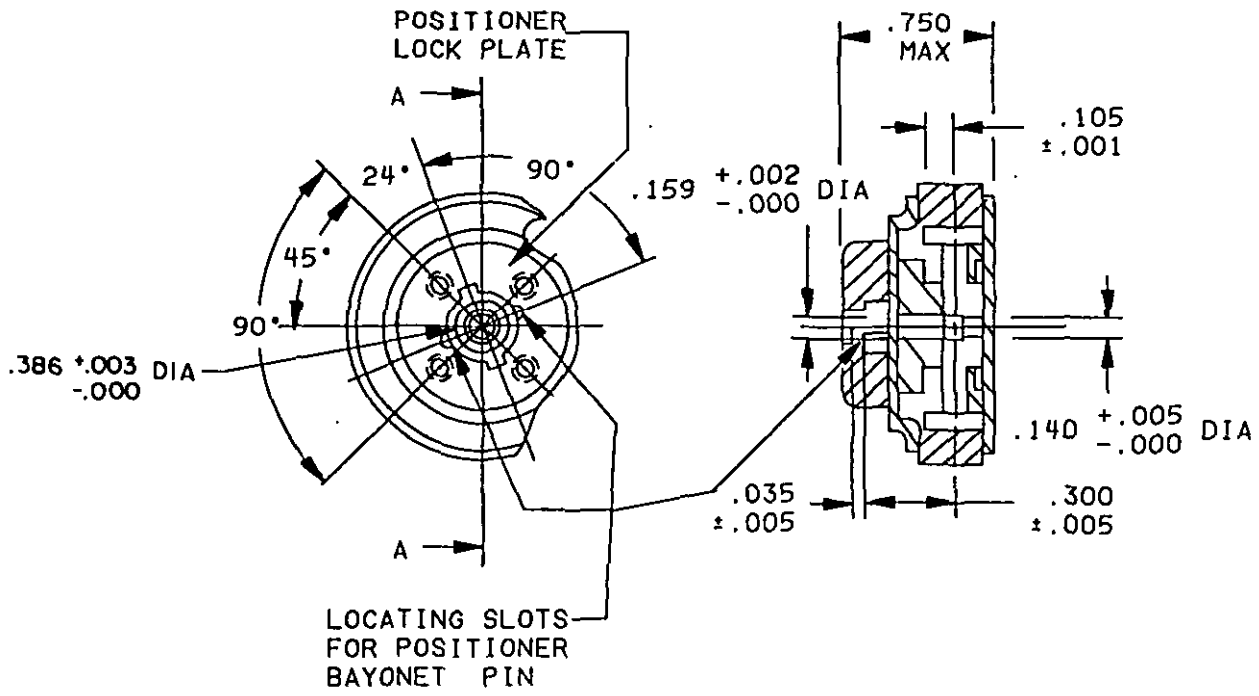


VIEW A

Part number	Body color	For inspection gaging, use
M22520/34-01	Optional	M22520/35-01

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.010 (0.25 mm) and 1/2° for angles.
4. Outline configuration optional within maximum dimensions shown.
5. This tool shall be used to crimp contacts, as indicated on figure 2 and table I.
6. This tool shall be classified as class I, type 1.
7. Material-indenter: Stainless steel, grade 440-C or oil hardened toolsteel hardened to Rockwell "C" 56-60.
   Handle cushioning: Plaster material, color optional (except blue).
8. The Government has a royalty-free license under U.S. patent no. 3,459,029 for the benefit of manufacturers of the patented item as disclosed herein either for the Government or for use in equipment to be delivered to the Government.

FIGURE 1. Minature adjustable crimp tool - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:49Z
Check the source to verify that this is the current version before use.

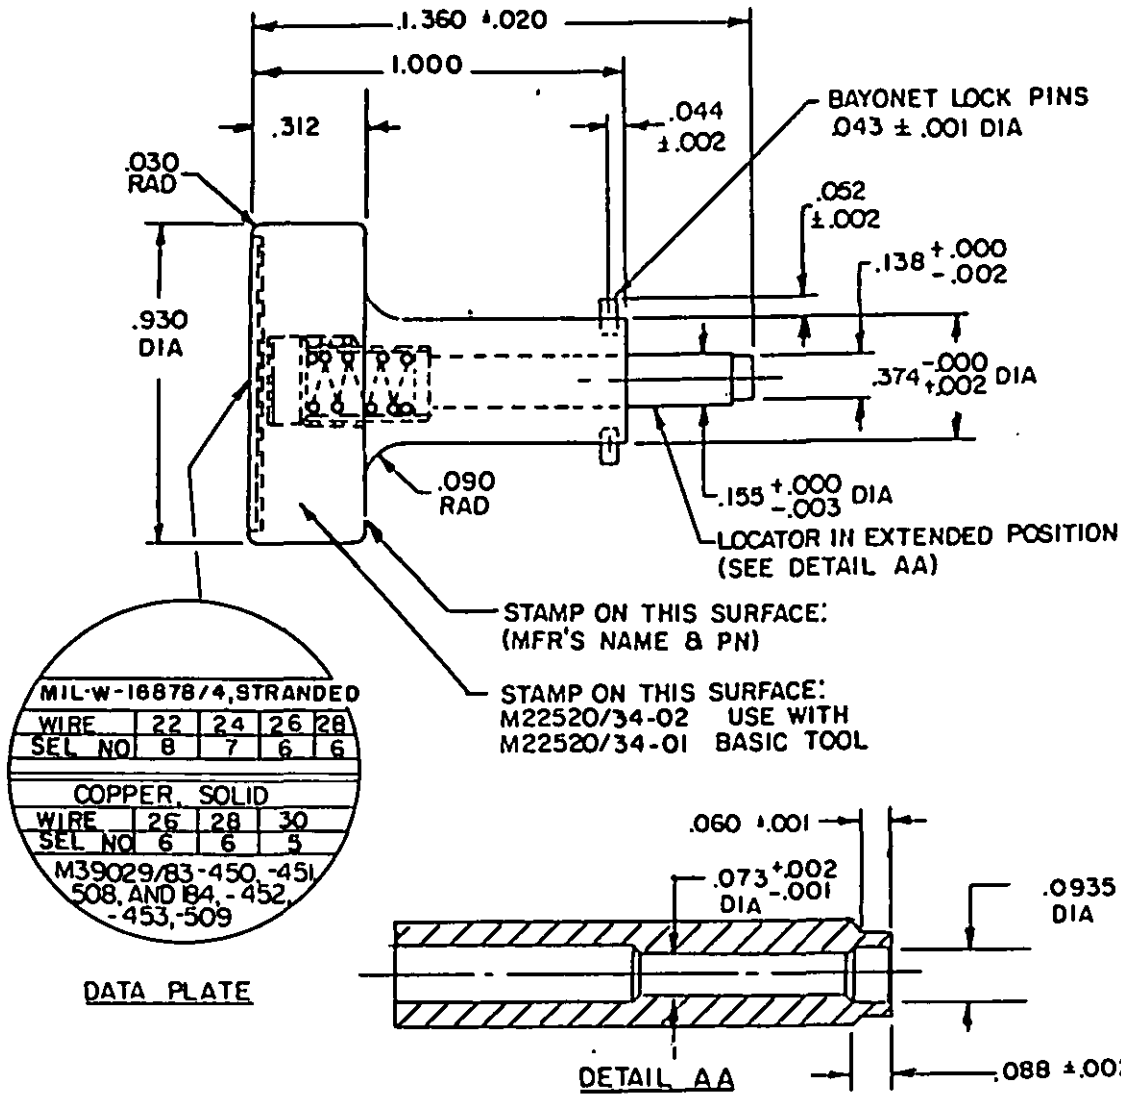


Part number	Body color	Contacts accommodated reference
M22520/34-02	Black	M39029/83-450 M39029/83-451 M39029/83-508 M39029/84-1-452 M39029/84-2-453 M39029/84-509

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Positioner body shall be made of aluminum.
4. Positioner locator shall be made of stainless steel.

FIGURE 2. Positioner assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:49Z
Check the source to verify that this is the current version before use.

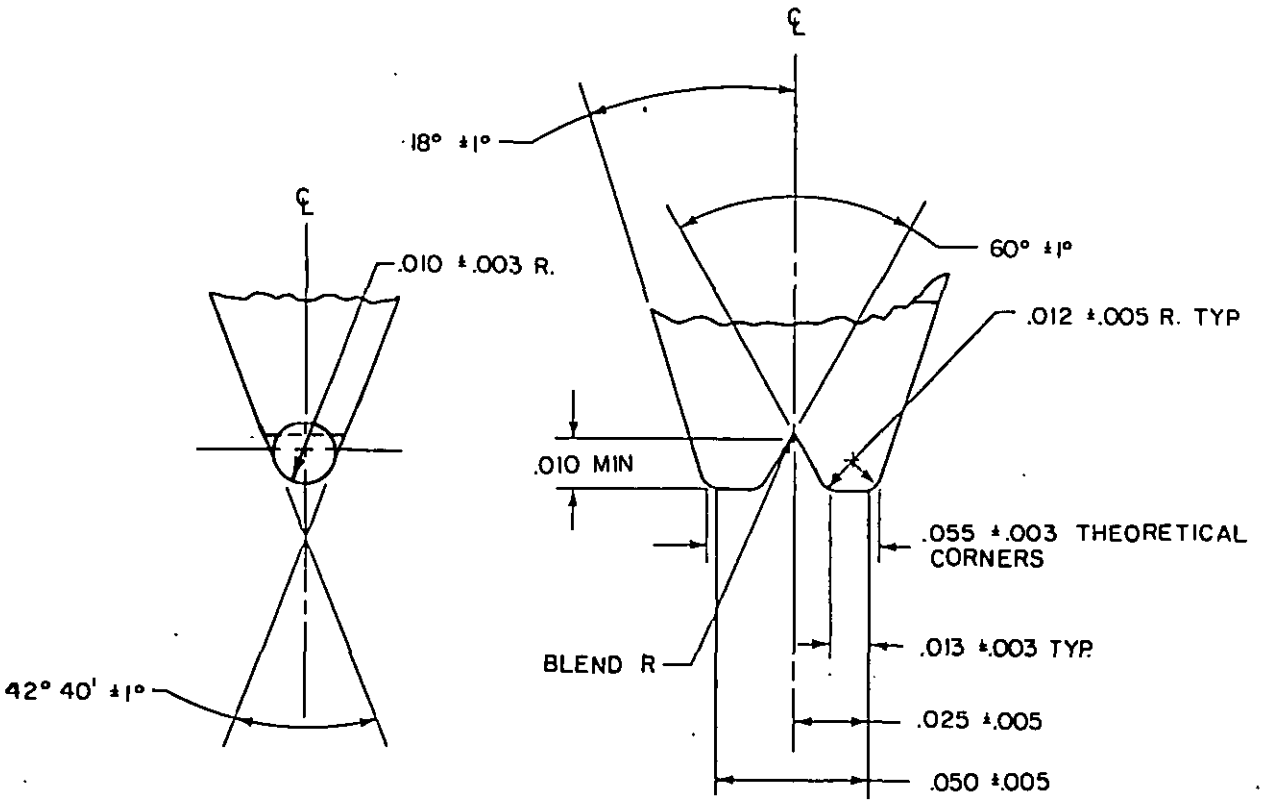

Selector Number	*Gage-inspection*	
	A ±.0001 GO dia	B ±.0001 NO GO dia
5	.0260	.0310
5	.0300	.0350
7	.0340	.0390
9	.0390	.0440

FIGURE 3. Double-indent, indentor.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:49Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.001	0.03	.044	1.12	.140	3.55	1.360	34.56
.002	0.05	.050	1.27	.155	3.93	1.650	41.93
.003	0.08	.052	1.33	.159	4.03	2.000	50.80
.005	0.13	.055	1.41	.300	7.62	4.500	114.30
.010	0.25	.060	1.52	.312	7.92	7.500	190.51
.012	0.30	.073	1.86	.374	9.49		
.013	0.33	.088	2.25	.386	9.80		
.025	0.64	.090	2.29	.625	15.87		
.030	0.76	.0935	2.38	.750	19.05		
.035	0.88	.105	2.66	.930	23.63		
.043	1.90	.138	3.52	1.000	25.40		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.010 (0.25 mm) and 1/2° for angles.
4. Outline configuration optional within maximum dimensions shown.
5. This tool shall be used to crimp contacts, as indicated on figure 2 and table I.
6. This tool shall be classified as class 1, type 1.
7. Material-indenter: Stainless steel, grade 440-C or oil hardened toolsteel hardened to Rockwell "C" 56-60.
   Handle cushioning: Plaster material, color optional (except blue).
8. The Government has a royalty-free license under U.S. patent no. 3,459,029 for the benefit of manufacturers of the patented item as disclosed herein either for the Government or for use in equipment to be delivered to the Government.

FIGURE 3. Double-indent, indentor - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:49Z
Check the source to verify that this is the current version before use.

TABLE I. Part number and characteristics.

Basic tool		Crimping tool dial selection no.			Crimp type contact (see note 3)
Part no.	For inspection gaging use	Wire size AWG	Wire (stranded)	Wire (copper) (solid)	
M22520/34-01	M22520/35-01	20	5		M39029/83-508 M39029/84-507
		22	8		M39029/83-450
		24	7		M39029/84-452
		26	6	6	
		28	6	6	M39029/83-451
		30		5	M39029/84-453

REQUIREMENTS:

1. The force required to make satisfactory crimps shall not exceed 45 pounds.
2. Operator's instructions to be supplied with tool.
3. The weight of the basic tool shall not exceed 12 ounces.
4. QPL Evaluating Activity: Commanding Officer, Naval Weapons Center, Crane, Indiana 47522.

Custodian:
Navy - EC

Review activities:
Navy - EE, OS, SH

User activity:
Navy - MC

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5120-NB87)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:49Z
Check the source to verify that this is the current version before use.