INCH-POUND

MIL-C-22520/36C
31 July 1990
SUPERSEDING
MIL-C-22520/36B(USAF)
28 June 1988

MILITARY SPECIFICATION SHEET

COMPRESSION TOOL, HAND, TYPE 2 FOR SEMIRIGID COAXIAL CABLE (CATEGORY F CONNECTORS)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-22520.


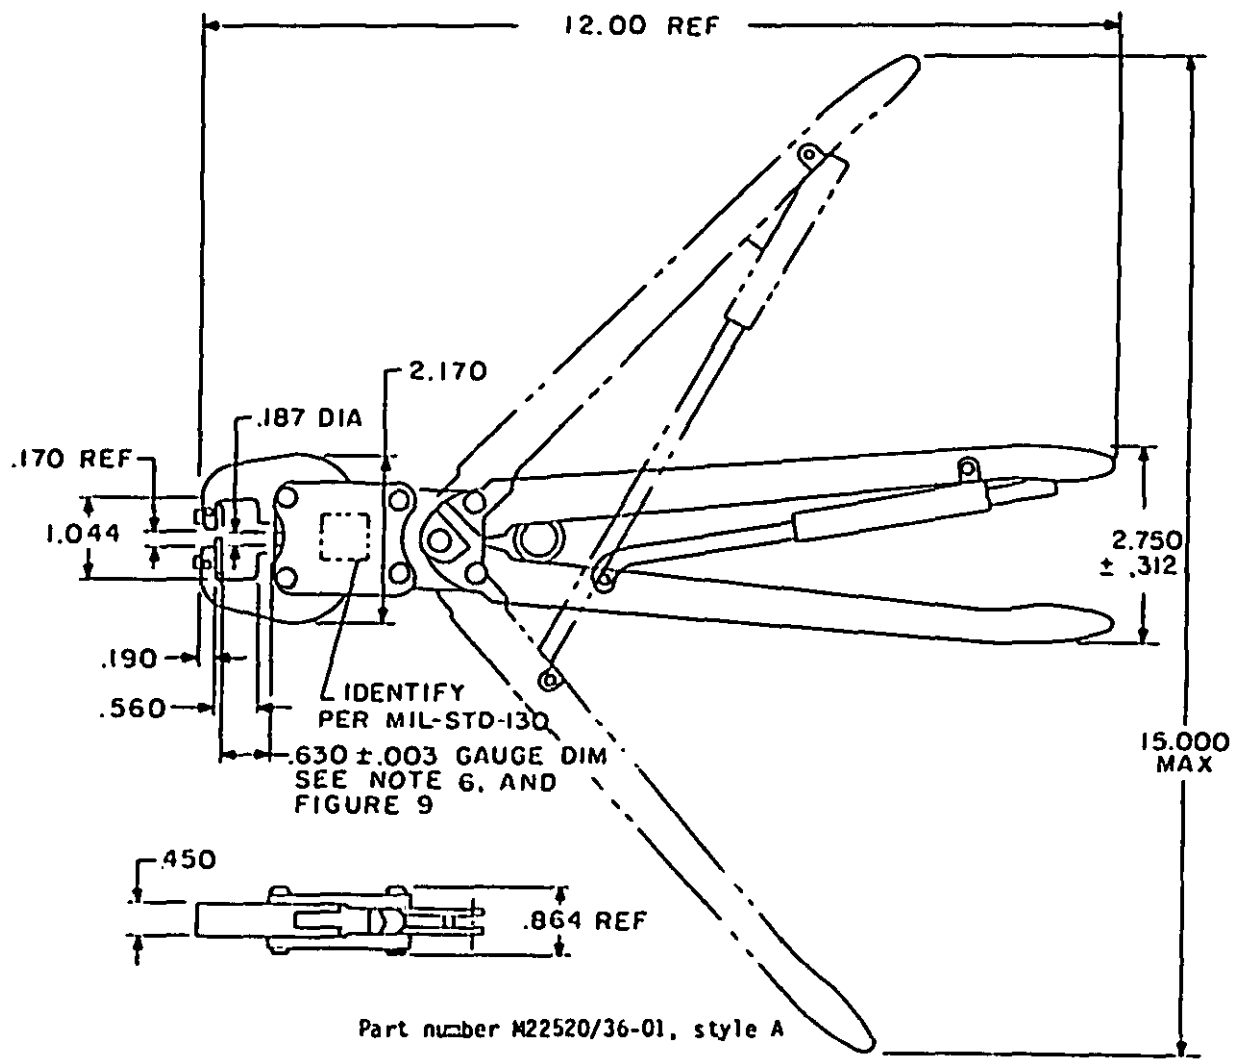


FIGURE 1. Basic tool part numbers M22520/36-01 and M22520/36-101.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-19T12:49Z
Check the source to verify that this is the current version before use.

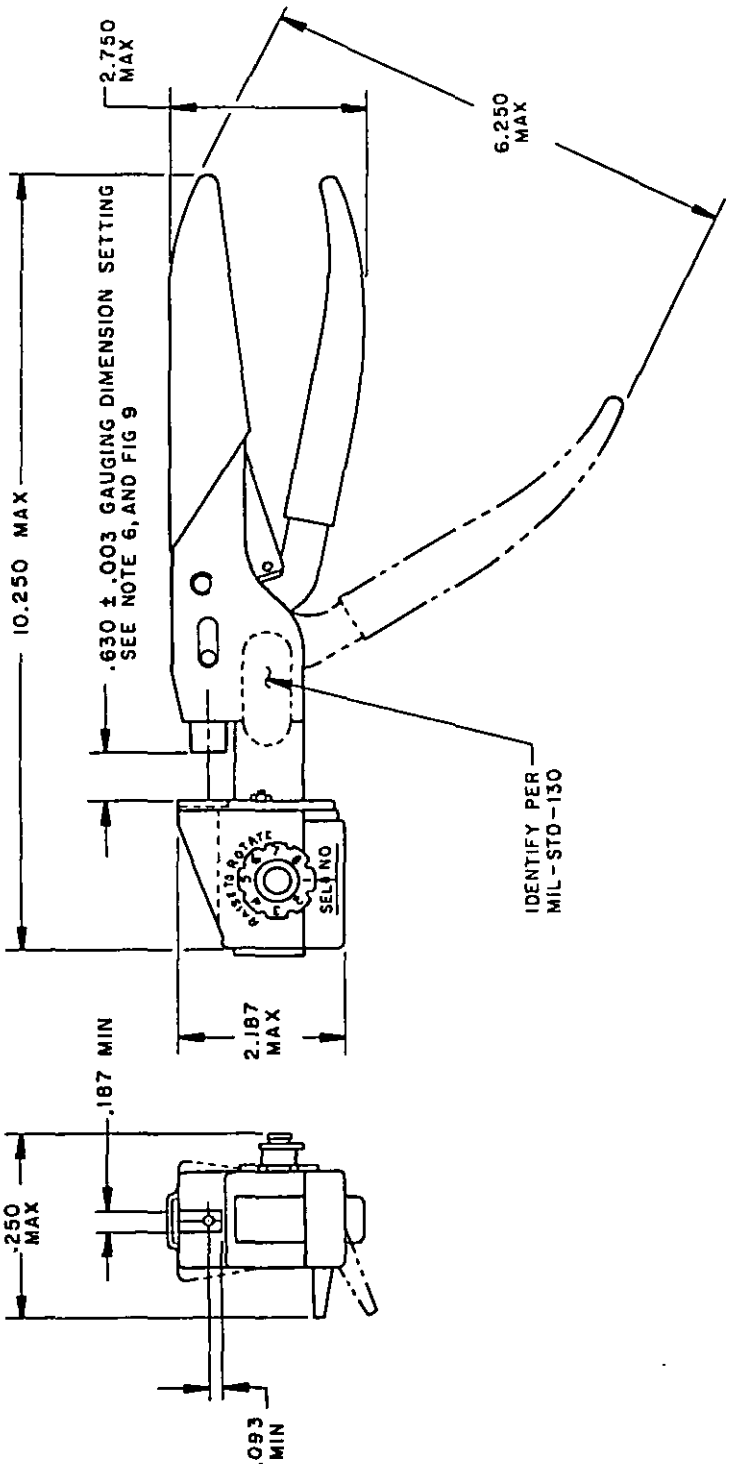

Part number M22520/36-101, optional design, style B

FIGURE 1. Basic tool part numbers M22520/36-01 and M22520/36-101 - Continued.

Source: https://assist.dla.mil -- Downloaded: 202610-19T12:49Z
Check the source to verify that this is the current version before use.

Inches	mm
.003	0.08
.0930	2.36
.170	4.32
.184	4.67
.187	4.75
.190	4.83
.450	11.43
.560	14.22
.864	21.94
2.170	55.11
2.187	55.55
2.25	57.2
2.50	63.50
2.750	69.85
6.250	158.75
9.875	250.82
10.250	260.35
12.00	304.8
15.000	381.00

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.005 (0.13 mm) for three place decimals and ±.5 degree for angles.
4. Outline configuration optional within maximum dimensions shown.
5. For applicable dies and locators, see table I.
6. For inspection gauge, use M22520/36-14 (selector position 1, optional design).
7. Dies are interchangeable in basic tool. (*Optional design dies with optional design tool only.*)
8. Tool must have M22520/36-02 for tool style A or M22520/36-102 for tool style B for use with .085 (2.16 mm) diameter semirigid coaxial cable; M22520/36-03 for tool style A or M22520/36-103 for tool style B for use with .141 (3.58 mm) diameter semirigid coaxial cable.

REQUIREMENTS:
1. Tool and dies shall meet the requirements of MIL-C-22520, unless otherwise specified.
2. The weight of the basic tool shall not exceed 2.0 pounds.
3. Ratchet release force on the handle shall be set to 50 to 80 pounds when the tool is fully closed. (*30 to 50 pounds on optional tool style B.*)

Part number M22520/36-01, style A
Part number M22520/36-101, optional design, style B

FIGURE 1. Basic tool part numbers M22520/36-01 and M22520/36-101 - Continued.

Source: https://assist.dla.mil -- Downloaded: 202610-19T12:49Z
Check the source to verify that this is the currentversion before use.

REQUIREMENTS (Type 1 tool, see figure 1):

Test samples: Unless otherwise specified, six connectors in accordance with MIL-C-39012, category F, shall be terminated using M17/130 cable.

Application data: See table I.

Crimping operation: Not applicable.

Calibration: Not applicable.

Handle and die return operation (full cycling): The return mechanism shall aid the handles and dies to return to the fully open position when tested in accordance with MIL-C-22520, test method in section 4. This requirement shall apply regardless of the plane or position of the tool, with or without a wired assembly located in the positioner or die.

High compression force: The tool shall conform to the gauging requirement of MIL-C-22520 after being subjected to a 100-pound minimum compression force in accordance with this test method.

Compression force: Handle force shall not exceed 80 pounds.

Deformation of crimped connection: Not applicable.

Axial concentricity (straightness): Not applicable.

Voltage drop: Not applicable.

Tensile strength: Not applicable.

Shock: Not applicable.

Low temperature crimp: Not applicable.

Cable retention force: See table II.

Intended use: This tool is intended to crimp MIL-C-39012 connectors in accordance with the appropriate connector assembly instructions to coaxial cables prepared using components identified on figures 4 through 9. For pre-crimp and post-crimp configurations, see figure 10.

TABLE I. Application data for type 1 tool.

Connector M39012/	Cable 1/ accommodated (ref) M17	Positioning dies M22520/ (optional design) see figure 2	Locator pins M22520/ (optional design) 2/ see figure 3	Type connector
79-3308 79-3312 79-4308	130-RG402	36-03 (36-103)	36-04 (36-104) 36-20 36-18 (36-104)	Plug with center contact
79-3307 79-3311 79-4307	133-RG405	36-02 (36-102)	36-04 (36-104) 36-20 36-18 (36-104)	

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 202640-19T12:49Z
Check the source to verify that this is the current version before use.

TABLE I. Application data for type 1 tool - Continued.

Connector M39012/	Cable 1/ accommodated (ref) M17	Positioning dies M22520/ (optional design) see figure 2	Locator pins M22520/ (optional design) 2/ see figure 3	Type connector
79-3208 79-3212 79-4208	130-RG402	36-03 (36-103)	36-04 (36-104) 36-20 36-18 (36-104)	Plug with center contact and safety wire holes
79-3207 79-3211 79-4207	133-RG405	36-02 (36-102)	36-04 (36-104) 36-20 36-18 (36-104)	
80-3211 80-3207 80-3307 80-4207 80-4307 80-3311	133-RG405	36-02 (36-102)	36-21 (36-107) 36-15 (36-106) 36-21 (36-107)	Right angle plug
80-3212 80-3208 80-3308 80-4208 80-4308 80-3312	130-RG405	36-03 (36-103)	36-21 (36-107) 36-15 (36-106) 36-21 (36-107)	
92-3301 92-4301	130-RG402	36-03 (36-103)	36-06 (36-104)	Plug without center contact
92-3201 92-4201			36-16 (36-104)	Plug without center contact with safety wire holes
81-3208 81-3212 81-4208	130-RG402	36-03 (36-103)	36-05 (36-105) 36-22 (36-108) 36-17 (36-105)	Jack
81-3207 81-3211 81-4207	133-RG405	36-02 (36-102)	36-05 (36-105) 36-22 (36-108) 36-17 (36-105)	
82-3208 82-3212 82-4208	130-RG402	36-03 (36-103)	36-05 (36-105) 36-22 (36-108) 36-17 (36-105)	Panel jack
82-3207 82-3211 82-4207	133-RG405	36-02 (36-102)	36-05 (36-105) 36-22 (36-108) 36-17 (36-105)	

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:49Z
Check the source to verify that this is the current version before use.

TABLE I. Application data for type 1 tool - Continued.

Connector M39012/	Cable 1/ accommodated (ref) M17	Positioning dies M22520/ (optional design) see figure 2	Locator pins M22520/ (optional design) 2/ see figure 3	Type connector
83-3208 83-3212 83-4208	130-RG402	36-03 (36-103)	36-05 (36-105) 36-22 (36-108) 36-17 (36-105)	Bulk head jack
83-3207 83-3211 83-4207	133-RG405	36-02 (36-102)	36-05 (36-105) 36-22 (36-108) 36-17 (36-105)	

1/ See specified specification sheet for additional cable coverage.
2/ Tool selector position shall be defined by connector manufacturers assembly instructions supplied with the connector.

TABLE II. Cable retention force.

Cable	Pounds (min) 1/	Torque 2/ inch ounce
M17/133-RG405	30	16
M17/130-RG402	60	55

1/ Connectors shall be tested as specified in MIL-C-39012.
2/ Torque to be applied one cable diameter from the end of the connector. Reverse bend not applicable.

Life: The tool shall be subjected to 7,500 cycles in accordance with the life test method below. The tool shall meet the in-service requirements of gauging, handle, indenter, die return operation, and ratcheting mechanism in section 3 of MIL-C-22520.

Gauging: Activate the tool to the fully closed position. The "GO" gauge shall be freely inserted in the space between the opposing closed dies and the ram of the tool. With the tool in the fully closed position, the "NO-GO" pin of the gauge shall not be insertable between the opposing dies and the ram of the tool.

Life test method: One tool shall be tested. The tool may be mounted such that it can be mechanically actuated at a rate of 15 to 20 cycles per minute. A cycle consists of depressing the handle, with the tool at the maximum open dimension, to the fully crimped (ratchet release) position and then allowing the handle to return to the fully open position. A test device that is .0625 inch (1.587 mm) larger than the .633 inch (16.07 mm) (maximum) gauge dimension shall be prepared and installed in the tool. The test load must be such that it will develop an initial minimum crimping force of 1,000 pounds and maintain that force through the crimping (travel) distance. The mimimum crimping (travel) distance must be the distance that will allow the tool handle to go through one complete cycle. The tool shall repeat the above cycle 7,500 times. The value of the force required to take the loaded tool through a complete cycle must not drop below 1,000 pounds during the life test and shall be verified every 500 cycles. The tool shall require no adjustments or repair during the 7,500 cycles. After every 2,500 cycles, the tool shall be manually operated to crimp six cabled connectors (three shall be crimped to the largest size and three to the smallest). After the life test, the tool shall be required to terminate the cable assembly with each individual vendor's qualified connector, and meet the requirements of the life paragraph and the crimping requirements of MIL-C-39012 for the connector.

Source: https://assist.dla.mil -- Downloaded: 202610-19T12:49Z
Check the source to verify that this is the current version before use.

Qualification inspection. See tables III, IV, and V.

Tools qualified to this specification sheet shall be used to qualify connectors of MIL-C-39012, category F.

The activity responsible for the qualified product list and the qualification of these tools is the Naval Air Systems Command (Attention: Commanding Officer, Naval Air Engineering Center (SESD) (Code 53), Lakehurst, NJ 08733-5100.

TABLE III. Qualification inspection.

Inspection	Requirement	Method	Basic tool	Dies
Visual and mechanical examination	In accordance with MIL-C-22520	In accordance with MIL-C-22520	X	X
Inspection gauging	In accordance with MIL-C-22520	In accordance with MIL-C-22520	X	X
Humidity (steady state)	In accordance with MIL-C-22520	In accordance with MIL-C-22520	X	X
In-service gauging	In accordance with MIL-C-22520	In accordance with MIL-C-22520	X	X
Handle and die return operation (full cycling)	Specification sheet requirements	Specification sheet requirements	X	X
Ratcheting mechanism	In accordance with MIL-C-22520	In accordance with MIL-C-22520	X	X
High compression force	Specification sheet requirements	Specification sheet requirements	X	X
Inspection gauging	In accordance with MIL-C-22520	In accordance with MIL-C-22520	X	X
Compression force	Specification sheet requirements	Specification sheet requirements	X	X
Cable retention	See table II	See table II	X	X
In-service gauging	In accordance with MIL-C-22520	In accordance with MIL-C-22520	X	X
Handle and die return operation (full cycling)	Specification sheet requirements	Specification sheet requirements	X 1/	X
Ratcheting mechanism	In accordance with MIL-C-22520	In accordance with MIL-C-22520	X	X
Life	Specification sheet requirements	Specification sheet requirements	X	X
Cable retention	See table II	See table II	X	X
Salt spray (corrosion)	In accordance with MIL-C-22520	In accordance with MIL-C-22520	X	X
In-service gauging	In accordance with MIL-C-22520	In accordance with MIL-C-22520	X	X
Handle and die return operation (full cycling)	Specification sheet requirements	Specification sheet requirements	X 1/	X
Ratcheting mechanism	In accordance with MIL-C-22520	In accordance with MIL-C-22520	X	X
Visual and mechanical examination	In accordance with MIL-C-22520	In accordance with MIL-C-22520	X	X

1/ Terminated wire assemblies not applicable.

Source: https://assist.dla.mil -- Downloaded: 202640-19T12:49Z
Check the source to verify that this is the current version before use.


TABLE IV. Group A inspection.

Inspection	Requirement	Method	Basic tool	Dies
Visual and mechanical examination	In accordance with MIL-C-22520	In accordance with MIL-C-22520	X	X
Inspection gauging	In accordance with MIL-C-22520	In accordance with MIL-C-22520	X	X
Ratcheting mechanism	In accordance with MIL-C-22520	In accordance with MIL-C-22520	X	X
Cable retention	See table II	See table II	X	X

TABLE V. Group B inspection.

Inspection	Requirement	Method	Basic tool	Dies
In-service gauging	In accordance with MIL-C-22520	In accordance with MIL-C-22520	X	X
Compression force	Specification sheet requirements	Specification sheet requirements	X	X
High compression force	Specification sheet requirements	Specification sheet requirements	X	X
Cable retention	See table II	See table II	X	X
In-service gauging	In accordance with MIL-C-22520	In accordance with MIL-C-22520	X	X
Handle and die return operation (full cycling)	Specification sheet requirements	Specification sheet requirements	X	X
Ratcheting mechanism	In accordance with MIL-C-22520	In accordance with MIL-C-22520	X	X
Visual and mechanical examination	In accordance with MIL-C-22520	In accordance with MIL-C-22520	X	X

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:49Z
Check the source to verify that this is the current version before use.

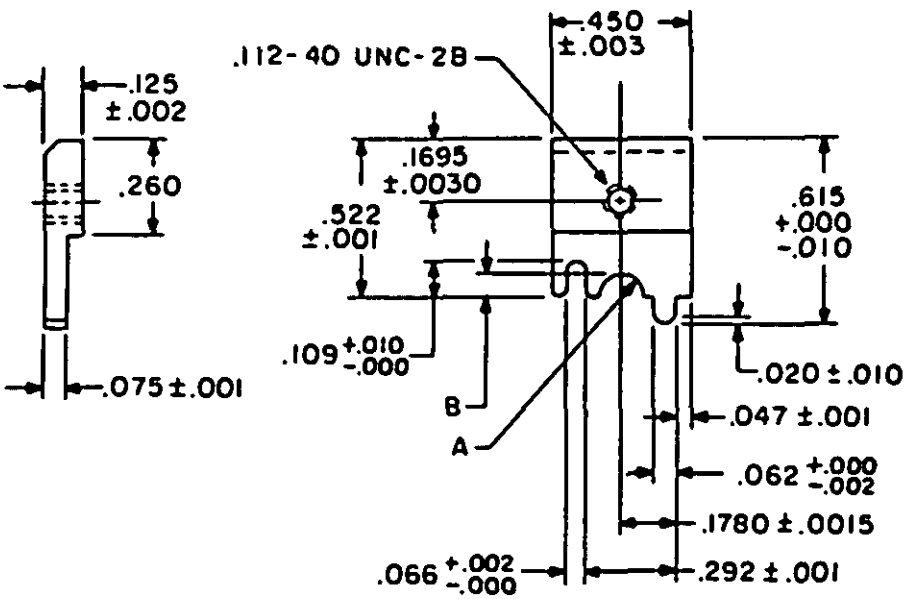

Inches	mm
.000	0.00
.0005	0.013
.001	0.03
.0015	0.038
.002	0.05
.003	0.08
.010	0.25
.020	0.51
.0450	1.143
.047	1.19
.062	1.57
.066	1.68
.0725	1.841
.075	1.90
.109	2.77
.112	2.84
.125	3.17
.1695	4.305
.1780	4.521
.260	6.60
.292	7.42
.450	11.43
.522	13.26
.615	15.62


Die set part number	A ±.0005 radius	B ±.0005
M22520/36-02	.0450	.0450
M22520/36-03	.0725	.0725

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.005 (0.13 mm) for three place decimals and ±.5 degree for angles. Break all sharp edges where dimensions are not specified.

REQUIREMENTS:
1. Material: Dies shall be steel in accordance with AISI type 3250, Rc 50-55; AISI type H13 or QQ-T-570, Rc 52-54, unless otherwise specified.
2. Surface texture on crimp surfaces and bottoming surface shall be 63 microinches, 125 microinches over rest of surface.

FIGURE 2. Positioning dies.

Source: https://assist.dla.mil -- Downloaded: 202610-19T12:49Z
Check the source to verify that this is the current version before use.

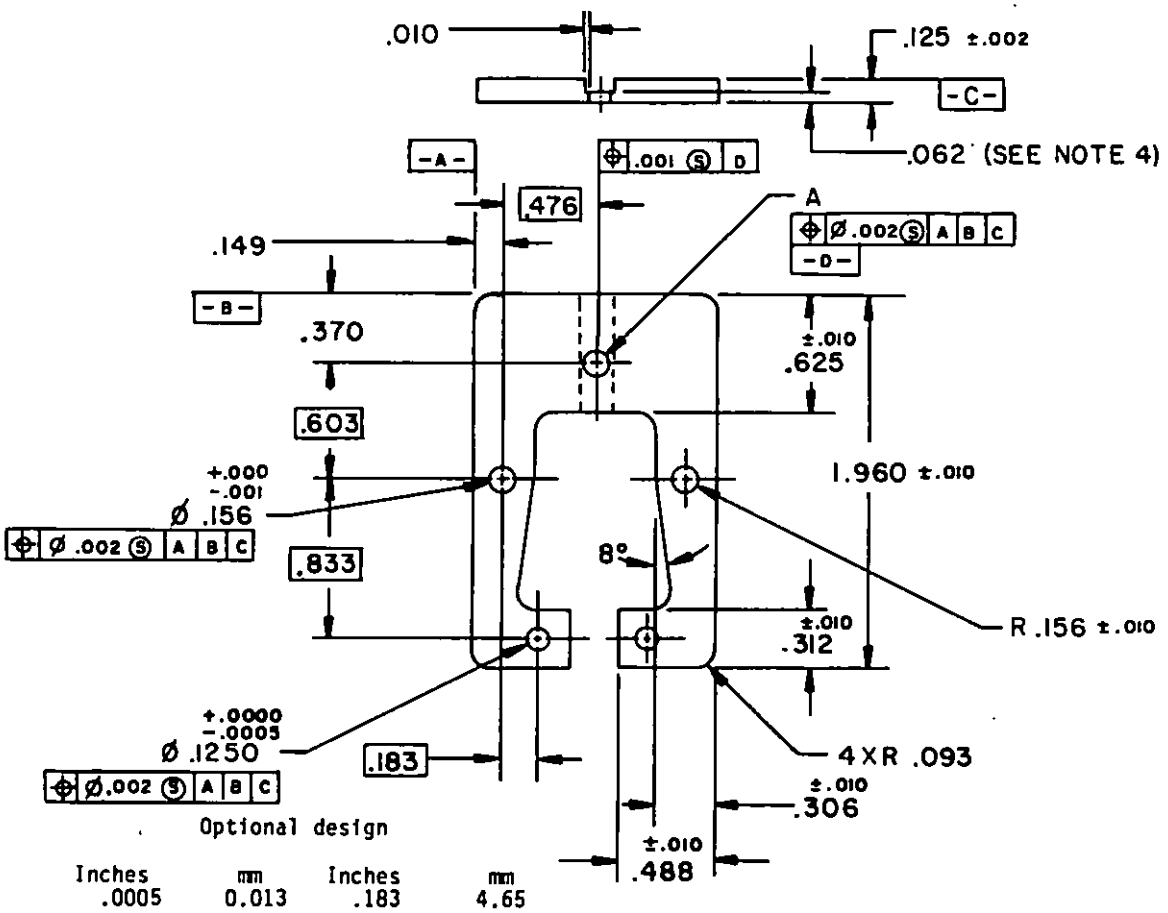

Inches	mm	Inches	mm
.0005	0.013	.183	4.65
.001	0.03	.306	7.77
.005	0.13	.312	7.92
.010	0.25	.370	9.40
.062	1.58	.488	12.40
.093	2.36	.625	15.87
.125	3.18	.630	16.00
.1450	3.68	.833	21.16
.149	3.78	1.960	49.78
.156	3.96		


Die set part number	A ±.0005 diameter
M22520/36-102	.0930
M22520/36-103	.1450

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.005 (0.13 mm) for three place decimals and ±.5 degree for angles.
4. Bend radius must be large enough to allow cable to clear .062 dimension.


REQUIREMENTS:
1. Material: Dies shall be tool steel in accordance with QQ-T-570 Rc 58-62.
2. Surface texture on crimp surfaces shall be 63 microinches, 125 microinches over rest of surface.

FIGURE 2. Positioning dies - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:49Z
Check the source to verify that this is the current version before use.

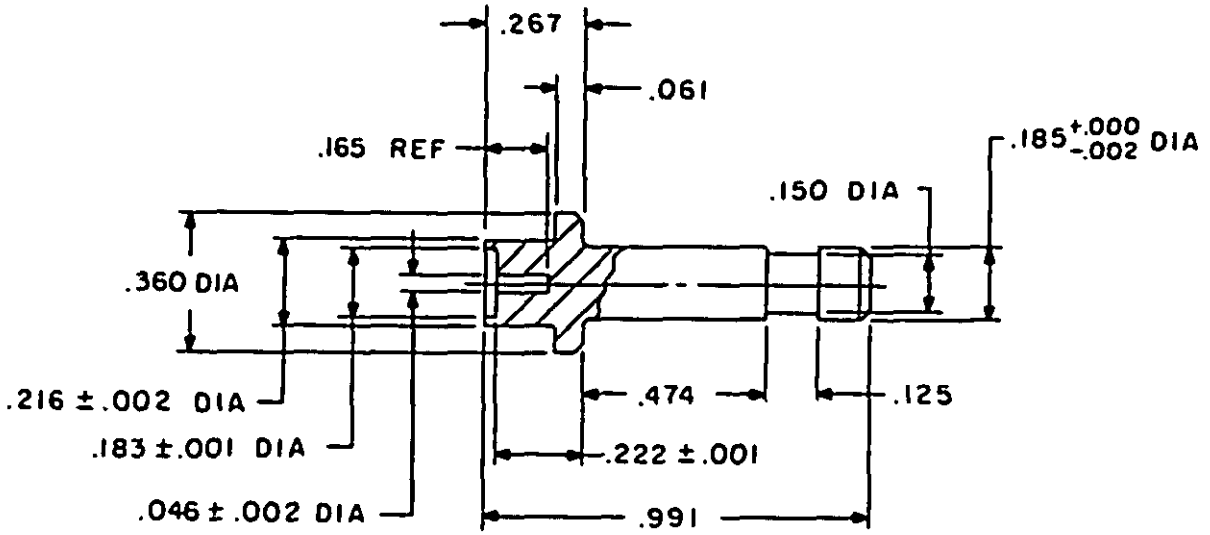


Part number M22520/36-04

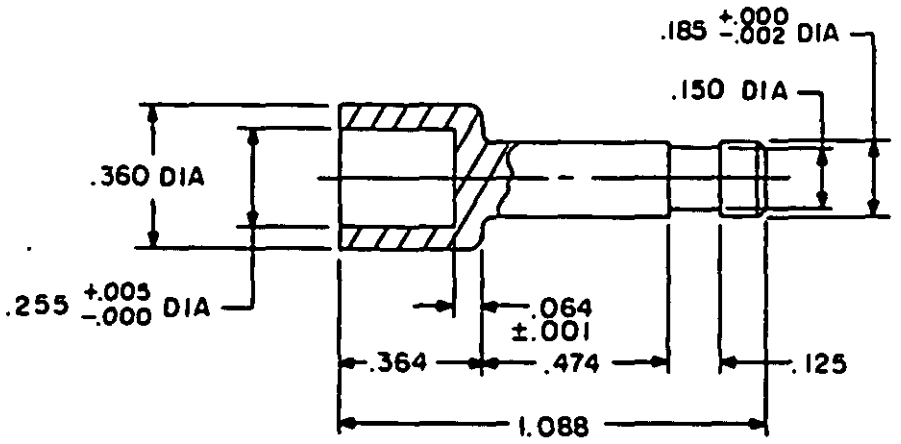


Part number M22520/36-05

FIGURE 3. Hand tool locators.

Source: https://assist.dla.mil -- Downloaded: 202640-19T12:49Z
Check the source to verify that this is the current version before use.

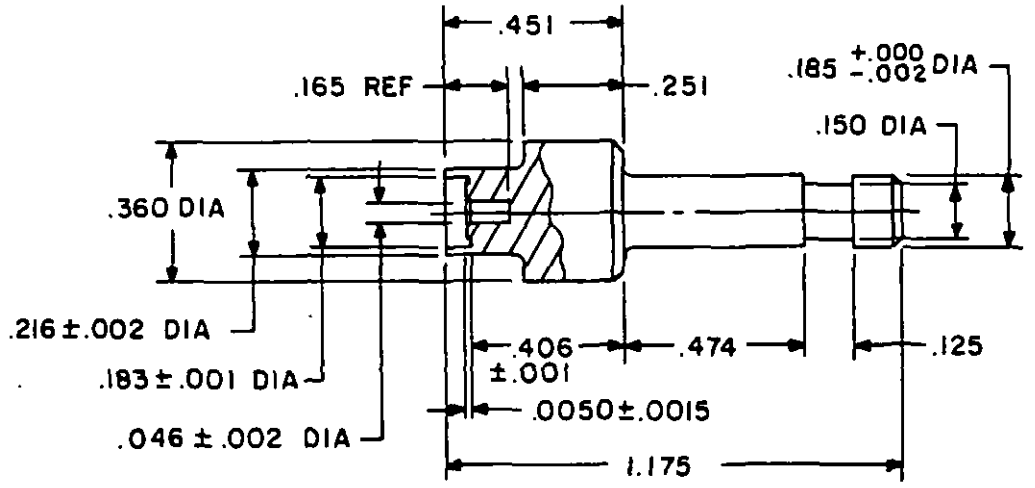


Part number M22520/36-06

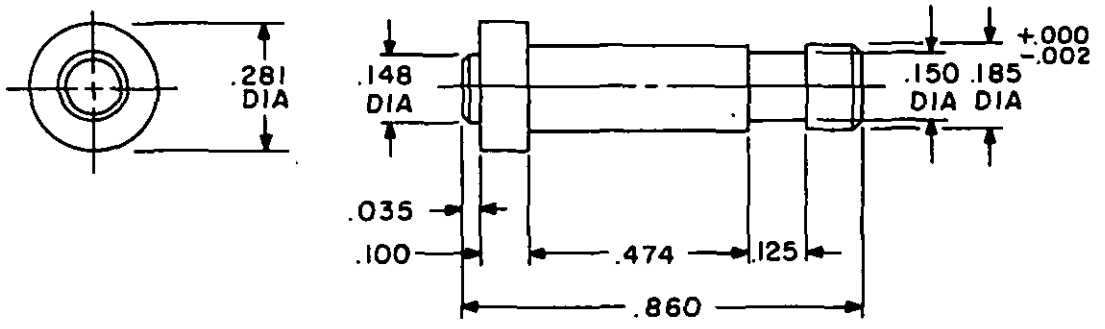


Part number M22520/36-15

FIGURE 3. Hand tool locators - Continued.

Source: https://assist.dla.mil -- Downloaded: 202610-19T12:49Z
Check the source to verify that this is the current version before use.

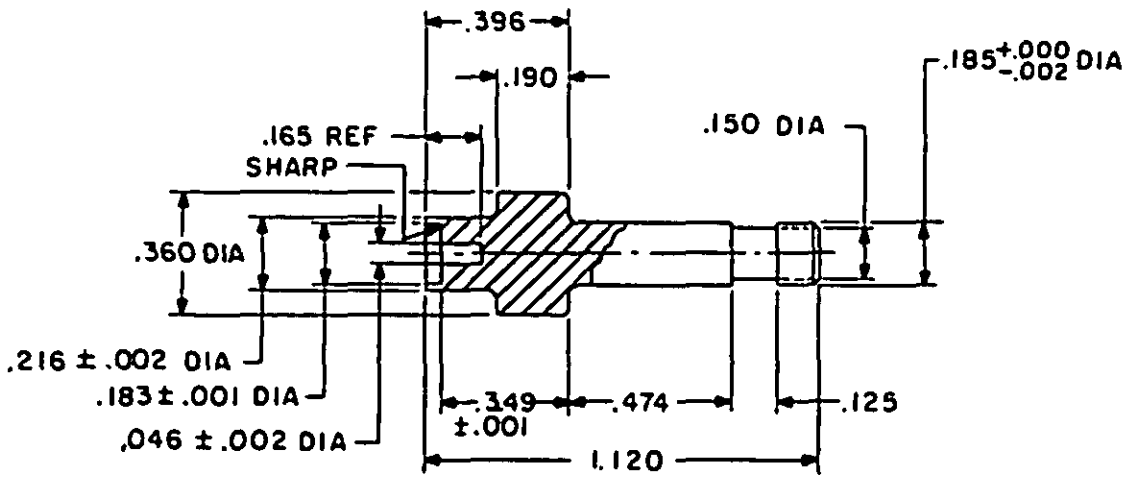


Part number M22520/36-16

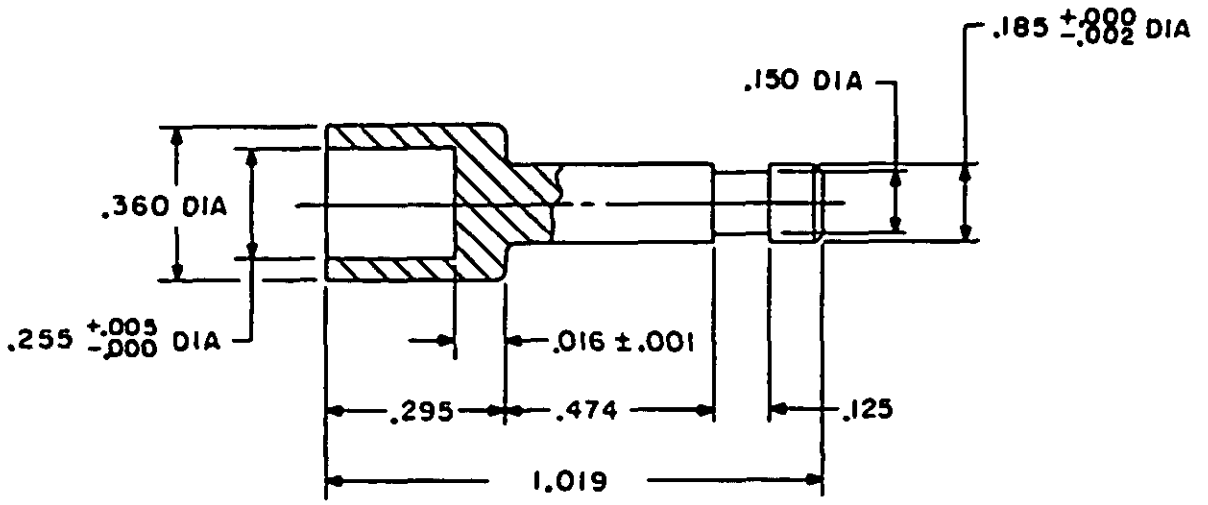


Part number M22520/36-17

FIGURE 3. Hand tool locators - Continued.

Source: https://assist.dla.mil -- Downloaded: 202610-19T12:49Z
Check the source to verify that this is the current version before use.

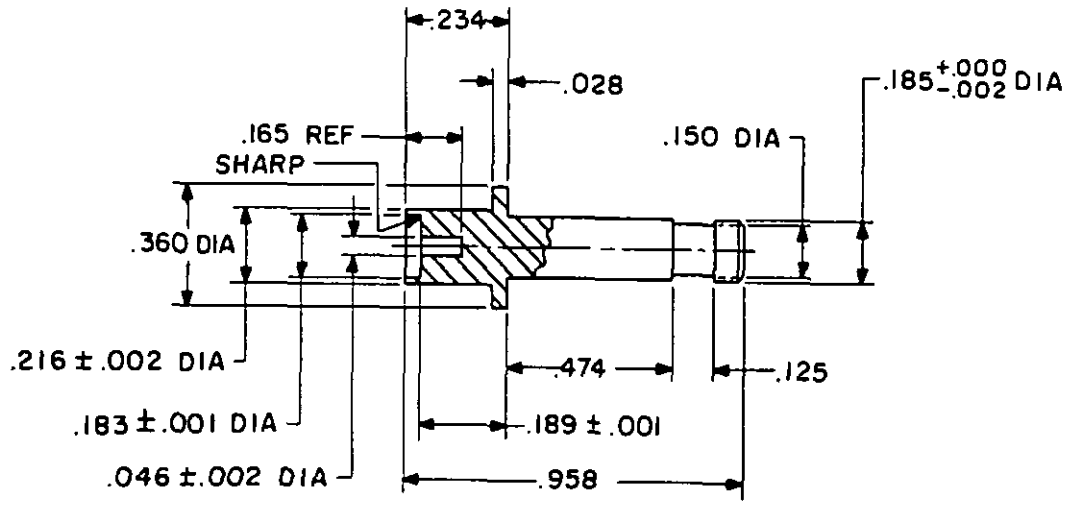


Part number M22520/36-18

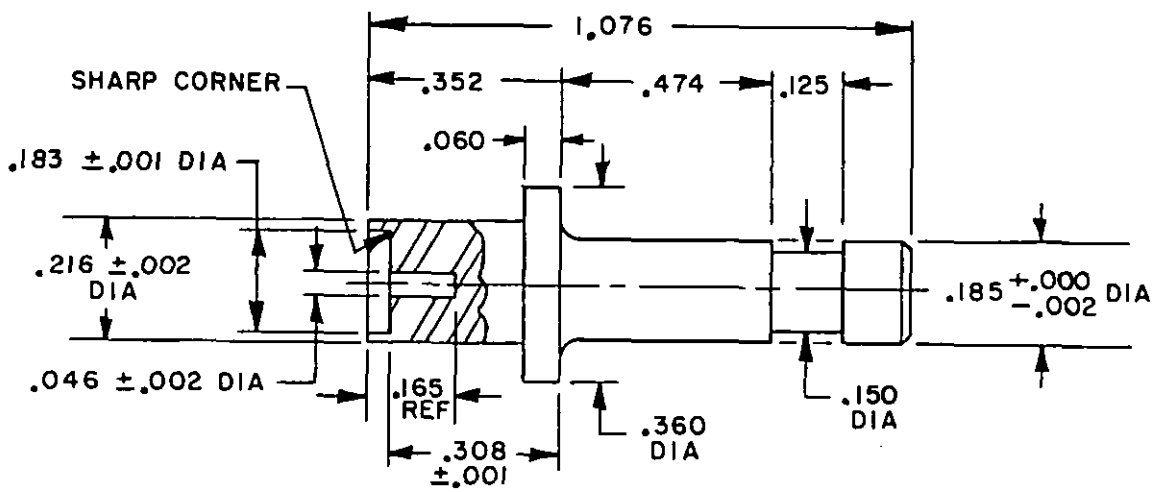


Part number M22520/36-20

FIGURE 3. Hand tool locators - Continued.

Source: https://assist.dla.mil -- Downloaded: 202610-19T12:49Z
Check the source to verify that this is the current version before use.

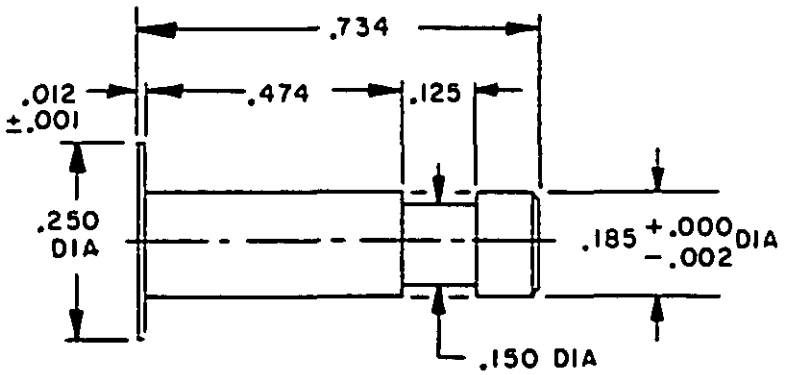


Part number M22520/36-21

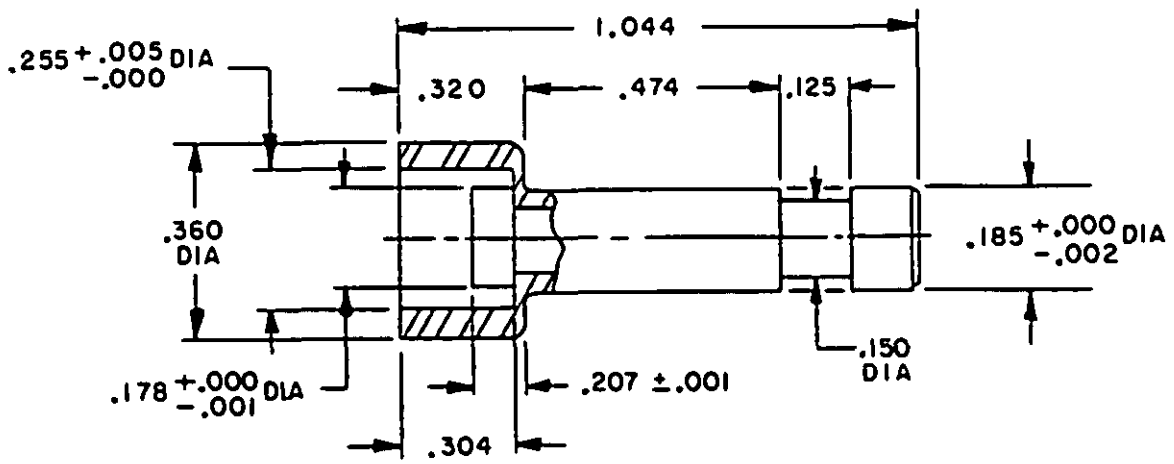


Part number M22520/36-22

FIGURE 3. Hand tool locators - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:49Z
Check the source to verify that this is the current version before use.

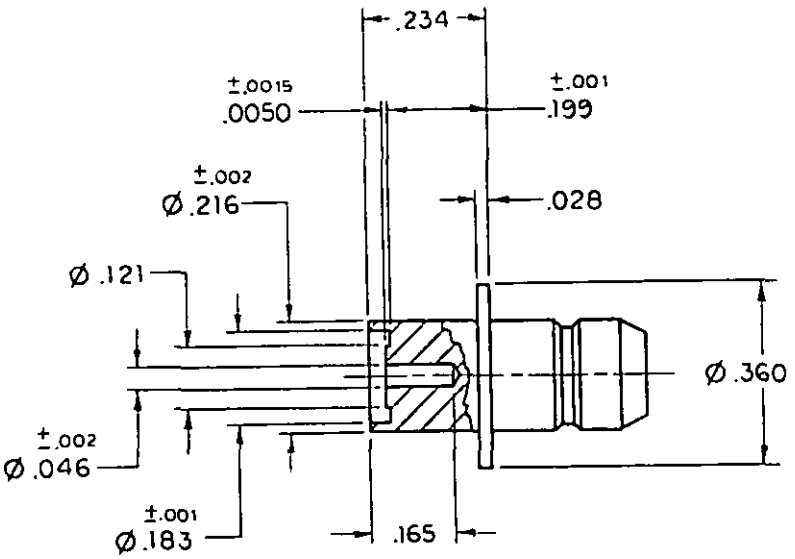


Part number M22520/36-104

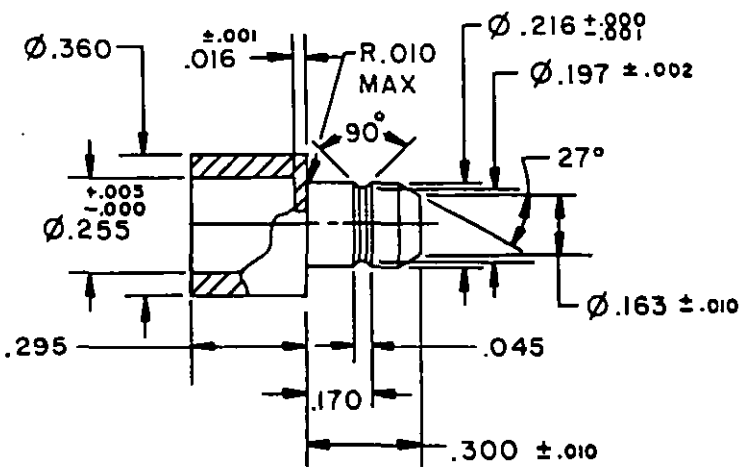


Part number M22520/36-105

FIGURE 3. Hand tool locators - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:49Z
Check the source to verify that this is the current version before use.

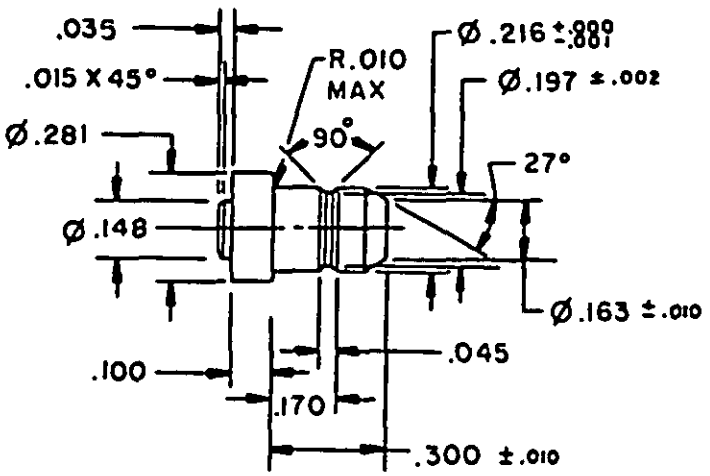


Part number M22520/36-106

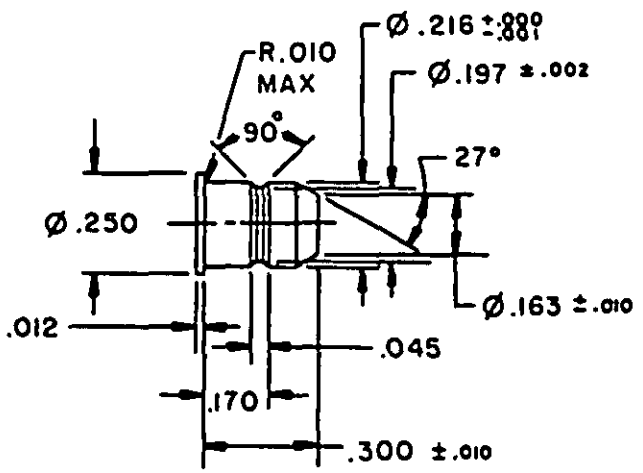

Part number M22520/36-107

FIGURE 3. Hand tool locators - Continued.

Source: https://assist.dla.mil -- Downloaded: 202610-19T12:49Z
Check the source to verify that this is the current version before use.

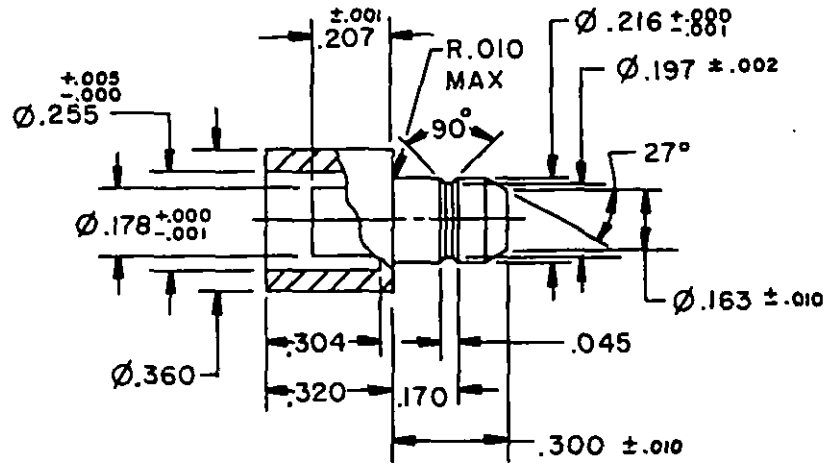

Part number M22520/36-108


Inches	mm	Inches	mm	Inches	mm
.000	0.00	.170	4.32	.324	8.23
.001	0.03	.178	4.52	.349	8.86
.0015	0.038	.183	4.65	.352	8.94
.002	0.05	.185	4.70	.360	9.14
.005	0.13	.189	4.80	.364	9.25
.010	0.25	.190	4.83	.369	9.37
.012	0.30	.197	5.00	.396	10.06
.015	0.38	.207	5.26	.406	10.31
.016	0.41	.216	5.49	.451	11.46
.028	0.71	.222	5.64	.474	12.04
.035	0.89	.234	5.94	.734	18.64
.045	1.14	.250	6.35	.860	21.84
.046	1.17	.251	6.38	.958	24.33
.060	1.52	.255	6.48	.991	25.17
.061	1.55	.267	6.78	1.019	25.88
.064	1.63	.281	7.14	1.044	26.52
.100	2.54	.295	7.49	1.076	27.33
.125	3.18	.300	7.62	1.088	27.64
.148	3.76	.304	7.72	1.093	27.76
.150	3.81	.308	7.82	1.120	28.45
.163	4.14	.320	8.13	1.175	29.84
.165	4.19				

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.005 (0.13 mm) for three place decimals and ±.5 degree for angles. Break all sharp edges where dimensions are not specified.
4. Locator is to be attached to moving ram. It shall provide a positive stop for locating the item to be terminated and retain it in place without being held by the operator. During the termination operation, the locator shall be free to move as necessary to prevent the terminated item from bending. See section 3 of MIL-C-22520.

REQUIREMENTS:
Material: Locators shall be steel in accordance with AISI type 3250, Rc 45-50; AISI type 02 or QQ-T-570, Rc 50-55.

FIGURE 3. Hand tool locators - Continued.

Source: https://assist.dla.mil -- Downloaded: 202610-19T12:49Z
Check the source to verify that this is the current version before use.

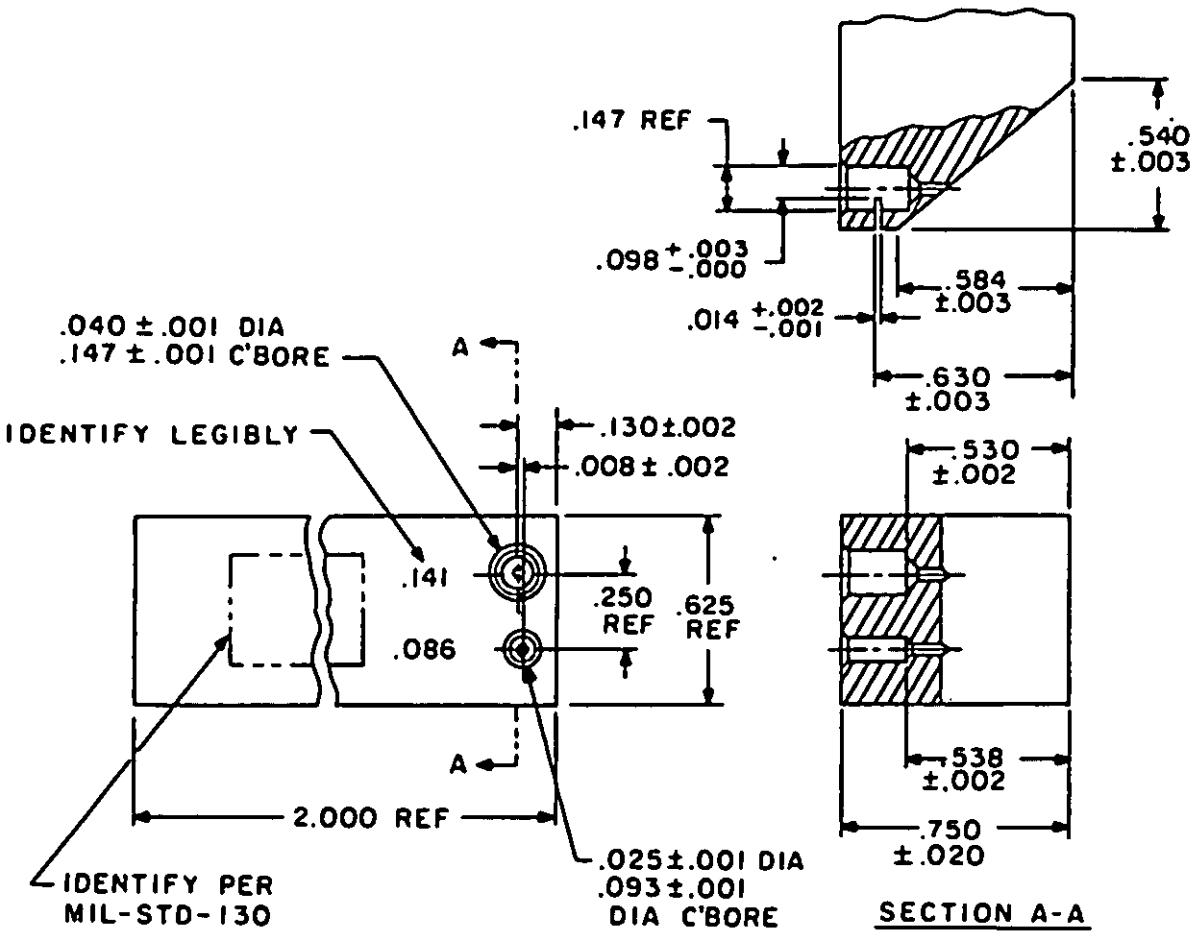


Part number M22520/36-07


Inches	mm	Inches	mm
.000	0.00	.098	2.49
.001	0.03	.130	3.30
.002	0.05	.141	3.58
.003	0.08	.147	3.73
.008	0.20	.530	13.46
.014	0.36	.538	13.67
.020	0.51	.540	13.72
.025	0.64	.584	14.83
.040	1.02	.625	15.88
.086	2.18	.630	16.00
.093	2.36	.750	19.05
		2.000	50.80

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.005 (0.13 mm) for three place decimals and ±.5 degree for angles. Break all sharp edges where dimensions are not specified.

FIGURE 4. Cable dressing figure.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:49Z
Check the source to verify that this is the current version before use.

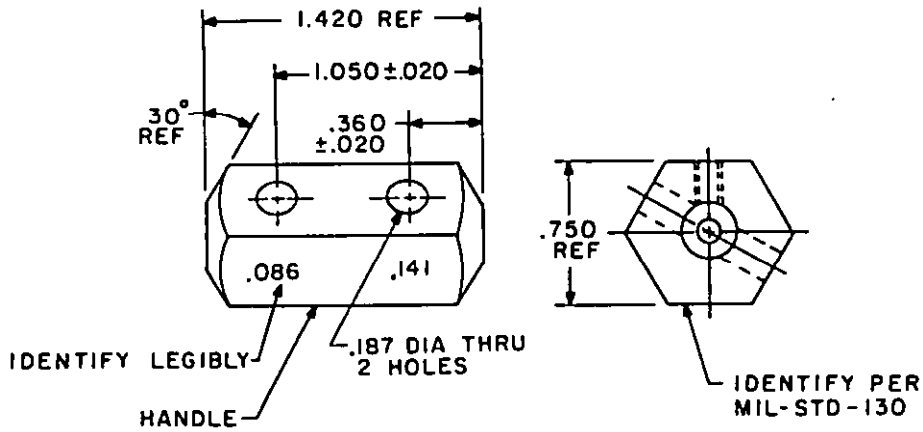

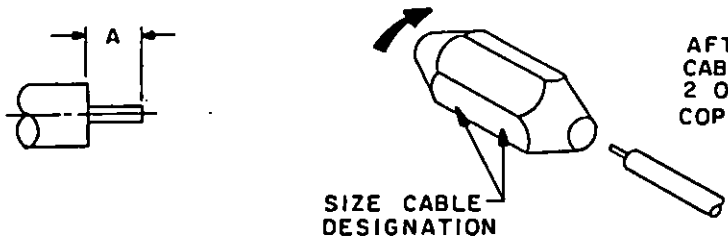

Cable	Dimension "A" see note	
	Min	Max
M17/130-RG402	.080	.090
M17/133-RG405	.065	.075

NOTE: Stripper shall strip cable to dimensions shown in the table.


Part number M22520/36-08

Inches	mm
.020	0.51
.065	1.65
.075	1.90
.080	2.03
.086	2.18
.090	2.29
.141	3.58
.187	4.75
.360	9.14
.750	19.05
1.050	26.67
1.420	36.07

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.005 (0.13 mm) for three place decimals and ±.5 degree for angles. Break all sharp edges where dimensions are not specified.

FIGURE 5. Trimming tool.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:49Z
Check the source to verify that this is the current version before use.

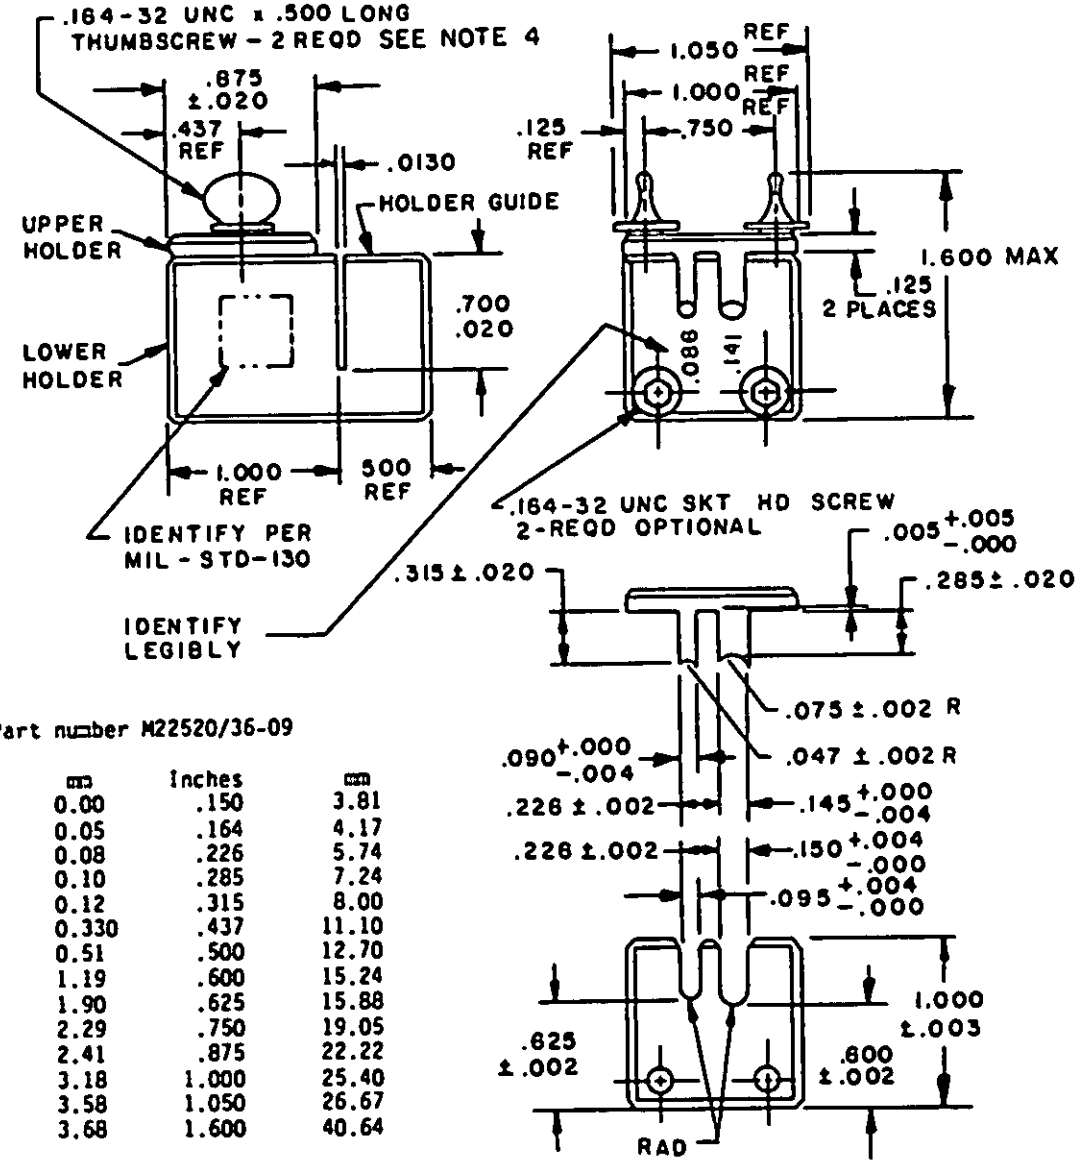

Part number M22520/36-09

Inches	mm	Inches	mm
.000	0.00	.150	3.81
.002	0.05	.164	4.17
.003	0.08	.226	5.74
.004	0.10	.285	7.24
.005	0.12	.315	8.00
.0130	0.330	.437	11.10
.020	0.51	.500	12.70
.047	1.19	.600	15.24
.075	1.90	.625	15.88
.090	2.29	.750	19.05
.095	2.41	.875	22.22
.125	3.18	1.000	25.40
.141	3.58	1.050	26.67
.145	3.68	1.600	40.64

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.005 (0.13 mm) for three place decimals and ±.5 degree for angles. Break all sharp edges where dimensions are not specified.
4. Thumbscrew head design optional.

REQUIREMENTS:
Material: Cable cut-off fixture shall be steel in accordance with AISI type 4340 or MIL-S-5000, Rc 45-50; AISI type A2 or ASTM A 681 Rc 57-59.

FIGURE 6. Cable cut-off fixture.

Source: https://assist.dla.mil -- Downloaded: 202610-19T12:49Z
Check the source to verify that this is the current version before use.


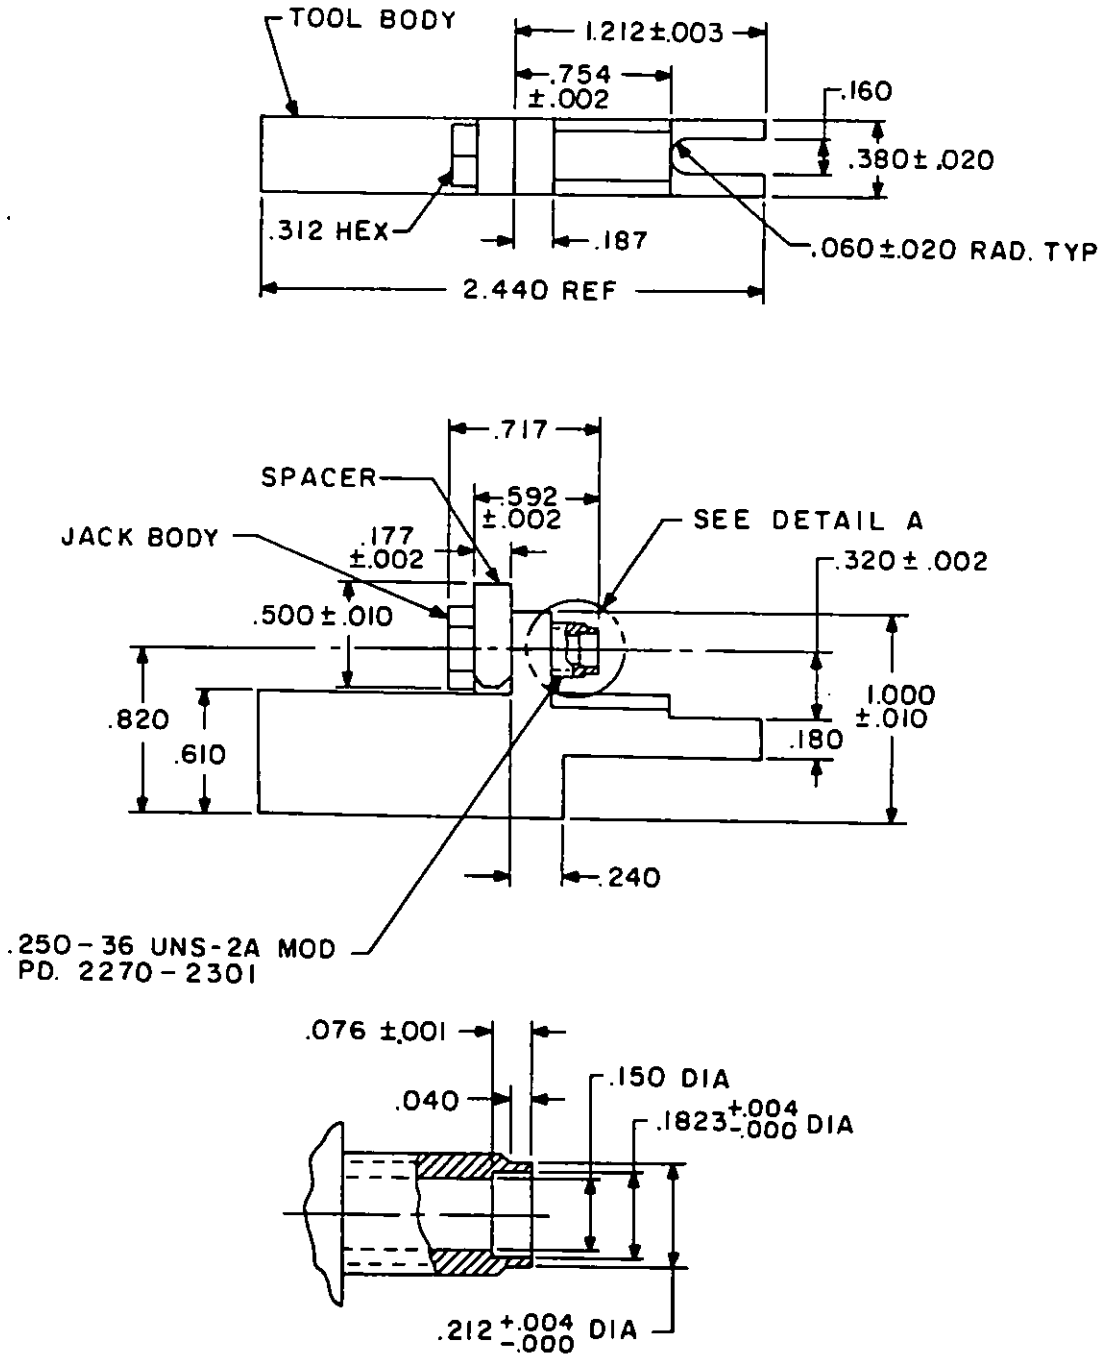


FIGURE 7. 90° cable bending fixture assembly (includes M22520/36-11, M22520/36-12, and M22520/36-13 bend segment).

Source: https://assist.dla.mil -- Downloaded: 202610-19T12:49Z
Check the source to verify that this is the current version before use.

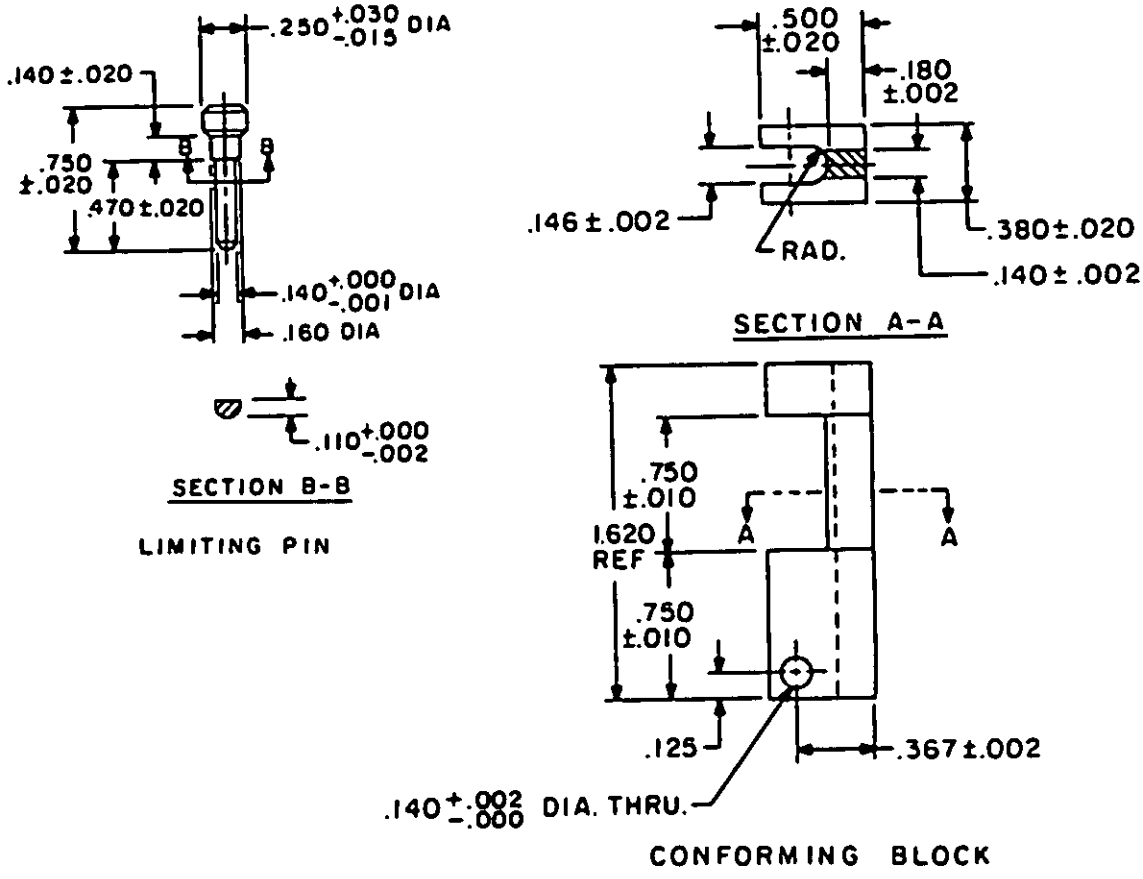

Part number M22520/36-10

Inches	mm	Inches	mm	Inches	mm
.000	0.00	.140	3.56	.367	9.32
.001	0.03	.146	3.71	.380	9.65
.002	0.05	.150	3.81	.470	11.94
.003	0.08	.160	4.06	.500	12.70
.004	0.10	.177	4.50	.592	15.04
.010	0.25	.180	4.57	.610	15.50
.015	0.38	.1823	4.630	.717	18.21
.020	0.51	.187	4.75	.750	19.05
.030	0.76	.212	5.38	.754	19.15
.040	1.02	.240	6.10	.820	20.83
.060	1.52	.250	6.35	1.000	25.40
.110	2.79	.312	7.92	1.212	30.78
.125	3.18	.320	8.13	1.620	41.15
				2.440	61.98

FIGURE 7. 90° cable bending fixture assembly (includes M22520/36-11, M22520/36-12, and M22520/36-13 bend segment) - Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:49Z
Check the source to verify that this is the current version before use.

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.005 (0.13 mm) for three place decimals and ±.5 degree for angles. Break all sharp edges where dimensions are not specified.


REQUIREMENTS:
Material: Block conforming to AISI type 4340 or MIL-S-5000, Rc 32-38; ASTM E 112, preheat treated. 90° bend tool body AISI 3250, Rc 45-50; AISI type 01 or QQ-T-570, Rc 50-55. Spacer AISI type 3250, Rc 45-50; AISI type 01 or QQ-T-570, Rc 50-55. Pin AISI type 3250, Rc 45-50; AISI type 02 or QQ-T-570, Rc 50-55.

FIGURE 7. 90° cable bending fixture assembly (includes M22520/36-11, M22520/36-12, and M22520/36-13 bend segment). - Continued.

Source: https://assist.dla.mil -- Downloaded: 202640-19T12:49Z
Check the source to verify that this is the currentversion before use.

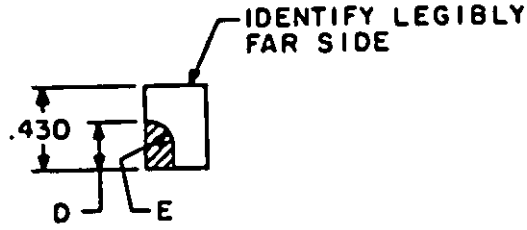

SECTION A-A

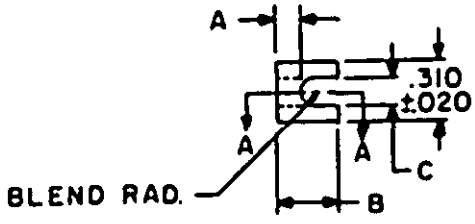

Inches	mm
.000	0.00
.002	0.05
.003	0.08
.010	0.25
.020	0.51
.086	2.18
.089	2.26
.125	3.18
.141	3.58
.144	3.66
.246	6.25
.250	6.35
.273	6.93
.310	7.88
.430	10.92


Bend segment part number	A ±.002	B ±.010	C +.002 -.000	D ±.002	E ±.003R	Cable size
M22520/36-11	.125	.310	.144	.246	.125	.141
M22520/36-12	.246	.430	.144	.246	.250	.141
M22520/36-13	.125	.310	.089	.273	.125	.086

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.005 (0.13 mm) for three place decimals and ±.5 degree for angles. Break all sharp edges where dimensions are not specified.

REQUIREMENTS:
Material: 90° bend tool segment AISI type 3250, Rc 45-50, AISI type A2 or ASTM A 681, Rc 57-59.

FIGURE 8. 90° cable bending fixture bend segment.

Source: https://assist.dla.mil -- Downloaded: 202610-19T12:49Z
Check the source to verify that this is the current version before use.

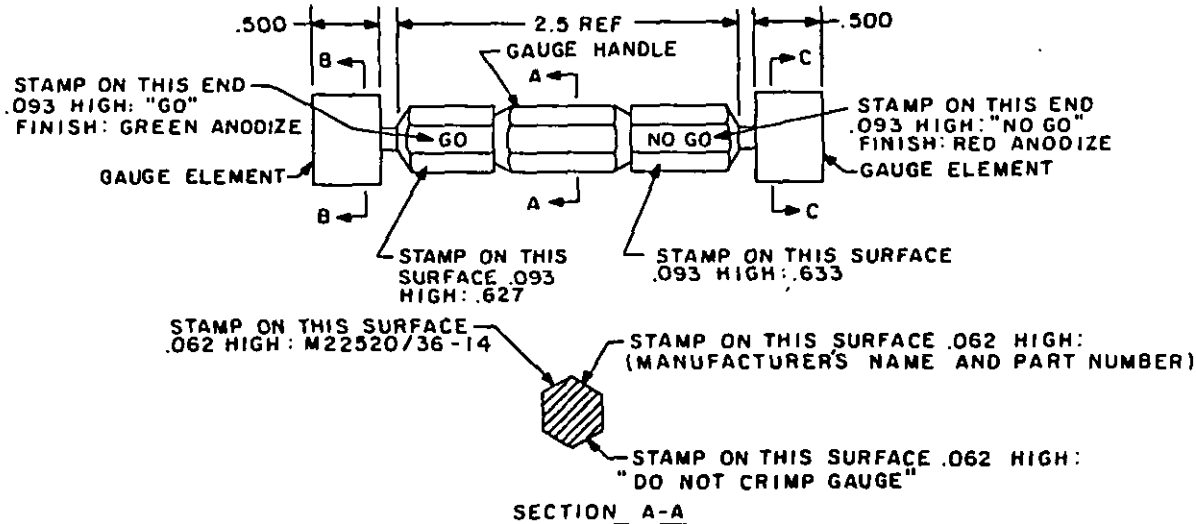

Inches	mm
.0025	0.064
.005	0.13
.085	2.16
.0900	2.286
.135	3.43
.156	3.96
.177	4.50
.1808	4.592
.250	6.35
.3125	7.938
.320	8.13
.440	11.18
.510	12.95


Part number M22520/36-14


NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.

REQUIREMENTS:
1. Gauges shall be made in accordance with Department of Commerce Commercial Standard CS8.
2. Material:
   Gauge elements: Alloy tool steel in accordance with QQ-T-570, class optional Rc 55-60.
   Gauge handle: Aluminum alloy in accordance with Department of Commerce Commercial Standard CS8.
3. Finish:
   Gauge elements: Chrome flash, .0002 to .0003 thick, in accordance with QQ-C-320, class 2.
4. Unless otherwise specified, stamping shall be indented.
5. Each gauge shall be furnished with a suitable container.

FIGURE 9. Gauge.

Source: https://assist.dla.mil -- Downloaded: 202610-19T12:49Z
Check the source to verify that this is the current version before use.

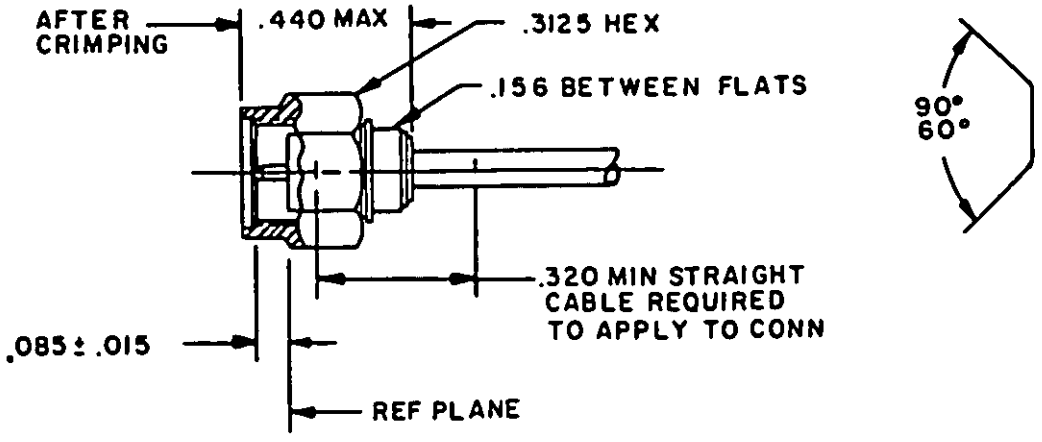

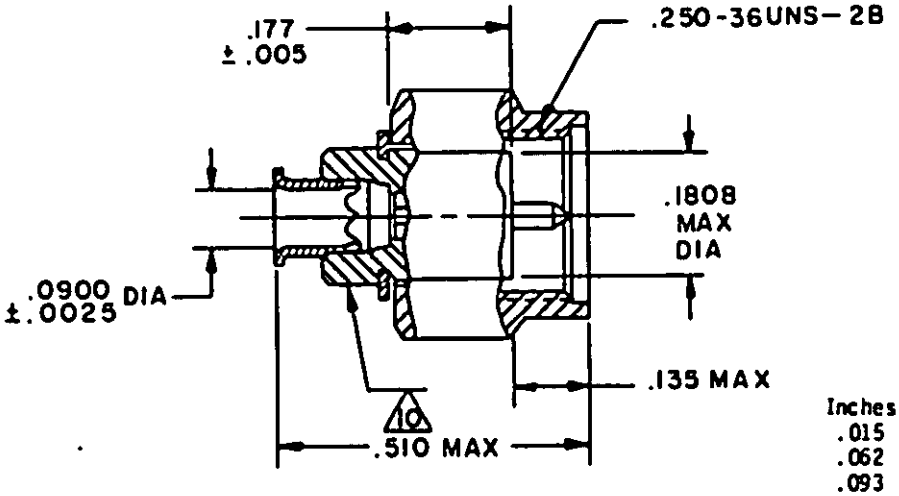

Inches	mm
.015	0.38
.062	1.57
.093	2.36
.250	6.35
.500	12.70
.627	15.93
.6272	15.931
.6328	16.073
.6330	16.078

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.005 (0.13 mm) for three place decimals and ±.5 degree for angles. Break all sharp edges where dimensions are not specified.

FIGURE 10. Pre-crimp and post-crimp configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:49Z
Check the source to verify that this is the current version before use.

Revision letters are not used to denote changes due to the extensiveness of the changes.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - AR, AV, MI
Navy - EC, TD
Air Force - 12, 99
DLA - ES
GSA - FAE

User activity:
Air Force - 19

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 5120-C069)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:49Z
Check the source to verify that this is the current version before use.