INCH-POUND

MIL-DTL-22520/37
12 September 1997

DETAIL SPECIFICATION SHEET

CRIMPING TOOL, ELECTRICAL, WIRE SPLICING, HAND ACTUATED, TYPE II, FOR ENVIRONMENTAL SPLICES, WIRE RANGE 26-12 AWG

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-22520 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.



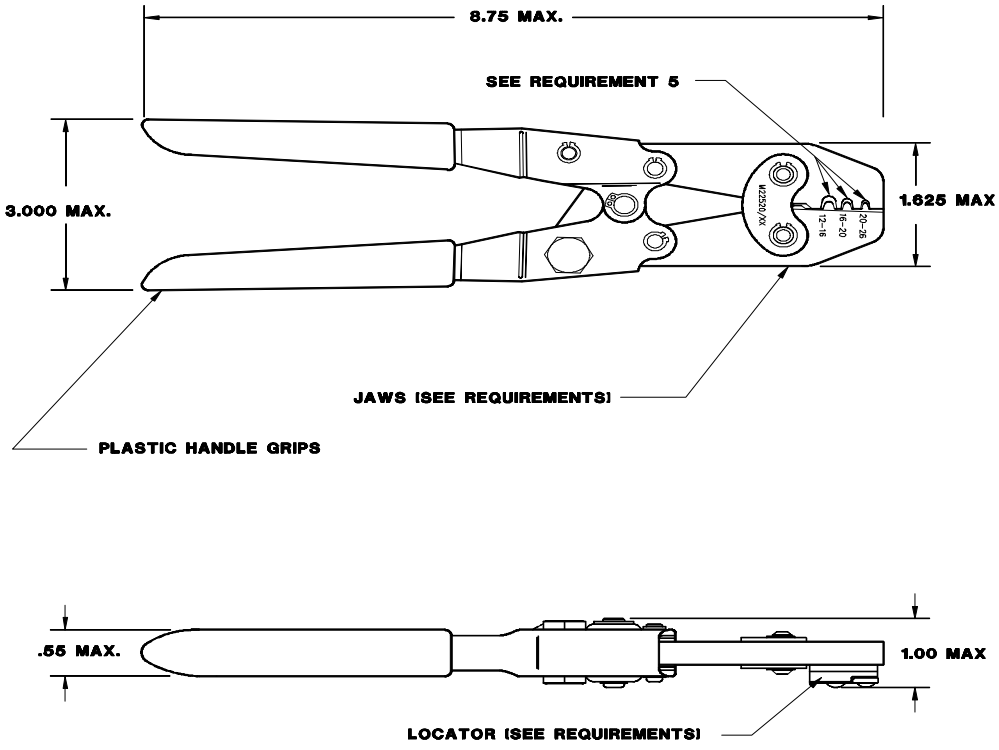


FIGURE 1. Crimping tool.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:49Z
Check the source to verify that this is the current version before use.



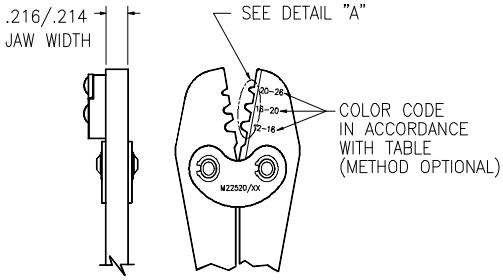

WIRE SIZE	COLOR CODE
20-26	RED
16-20	BLUE
12-16	YELLOW

WIRE SIZE	GAGING LIMITS	
20-26	GO 0.0250	NO-GO 0.0350
16-20	GO 0.0420	NO-GO 0.0520
12-16	GO 0.0620	NO-GO 0.0720

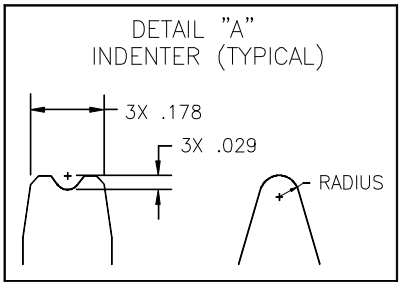

WIRE SIZE	RADIUS
20-26	0.023
16-20	0.036
12-16	0.047

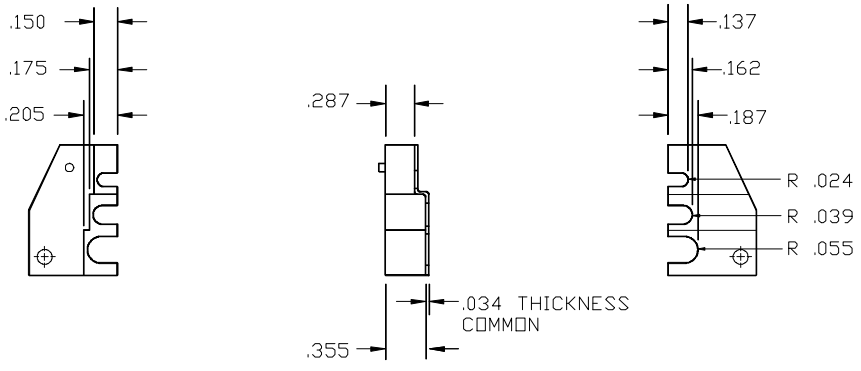


FIGURE 3. Locator.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:49Z
Check the source to verify that this is the current version before use.

INCHES	MM	INCHES	MM	INCHES	MM
0.023	0.584	0.0620	1.575	0.175	4.445
0.024	0.597	0.0720	1.829	0.178	4.521
0.0250	0.635	0.076	1.930	0.187	4.737
0.029	0.737	0.078	1.981	0.205	5.207
0.034	0.864	0.090	2.286	0.214	5.436
0.0350	0.889	0.102	2.591	0.216	5.486
0.036	0.914	0.113	2.870	0.287	7.290
0.039	0.991	0.133	3.378	0.355	9.017
0.0420	1.067	0.137	3.467	0.550	13.970
0.047	1.194	0.150	3.810	1.00	25.400
0.0520	1.321	0.156	3.962	1.625	41.275
0.054	1.372	0.162	4.115	3.000	76.200
0.055	1.384	0.170	4.318	8.75	222.250

NOTES:

1. Outline configuration optional within maximum dimensions shown for a closed handle position.
2. Dimensions are in inches.
3. Metric equivalents are given only for general information and are based on 1.00 inch = 25.4 mm.
4. Unless otherwise specified tolerances are ± 0.010 (0.25 mm) for three place decimals and ±0.5° for angles.
5. Complete manufacturer's name or logo in accordance with SAE-AIR1351 shall be permanently embossed or printed on the tool.

REQUIREMENTS:

1. Tool shall not weigh in excess of 1.0 lb (0.45 kg).
2. Material: Jaws - 50 point carbon min. alloy steel; Heat Treat Rockwell C43-54 or equivalent as approved by the qualifying activity.
   Locator - S 40 point carbon min. alloy steel or equivalent as approved by the qualifying activity.
   Handles - Steel or equivalent as approved by the qualifying activity.
   Grips - Plastic, rubber, or equivalent as approved by the qualifying activity (color optional).
3. Finish: Jaw - Black oxide or equivalent as approved by the qualifying activity.
   Locator - Black oxide or equivalent as approved by the qualifying activity.
   Handles - Nickel or chrome plating commercial grade or equivalent as approved by the qualifying activity.
4. Cycle control (ratchet) adjustment device shall be set to release between 40 to 50 pounds and permanently fixed in position so as to allow no adjustments in service.
5. Convex crimp surfaces shall be polished to 16 (RMS) microfinish.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:49Z
Check the source to verify that this is the current version before use.

6. Tool manufacturer shall supply instruction sheets with each tool which includes applications, usage, instructions and other necessary details.
7. Tool part number M22520/37-01.

APPLICATION:

Use on MIL-S-81824/1 environmental crimp splices with wire sizes 26 through 12 (AWG).

SUPERSESSION DATA:

The following part numbers are superseded by M22520/37-01:

M22520/5-102 and M22520/5-103.
M22520/10 -103 and M22520/10-104.

Custodians:
Army - CR
Navy - AS
Air Force - 85

Preparing activity:
Navy - AS
(Project 5120-0085-014)

Review activities:
Army - MI, AR, AV
Navy - SH, EC, OS
Air Force - 11, 17, 99
DLA - CC

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:49Z
Check the source to verify that this is the current version before use.