INCH-POUND

MIL-DTL-22520/38
12 September 1997

DETAIL SPECIFICATION SHEET

CRIMPING TOOL, TERMINAL, HAND ACTUATED, WIRE TERMINATION, TYPE II, FOR EXTERNAL POWER PLUG SOCKET CONTACTS AND LUG TERMINAL SIZES 22-10

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-22520 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

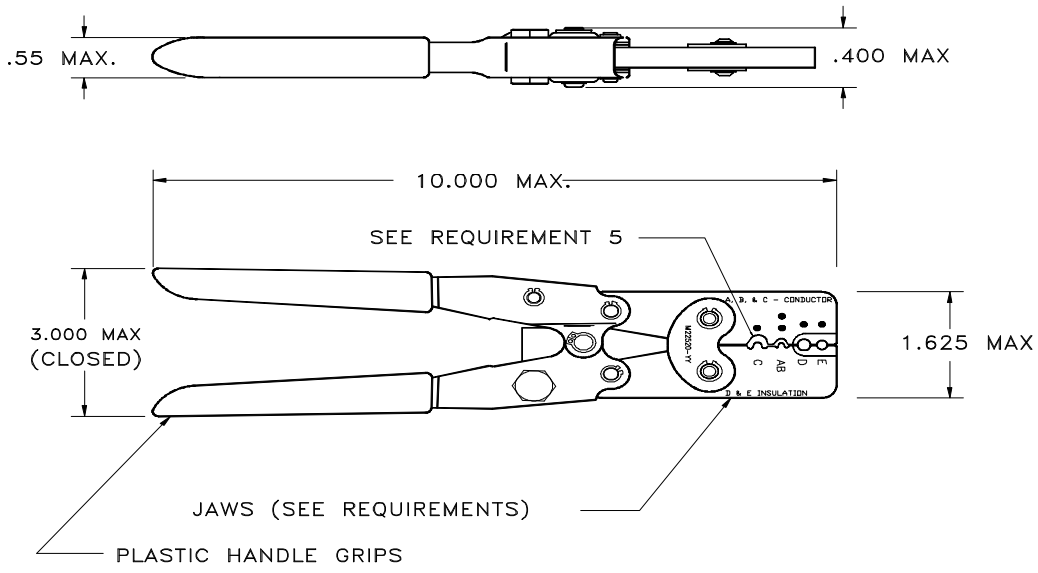


FIGURE 1. Crimping tool

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:49Z
Check the source to verify that this is the current version before use.


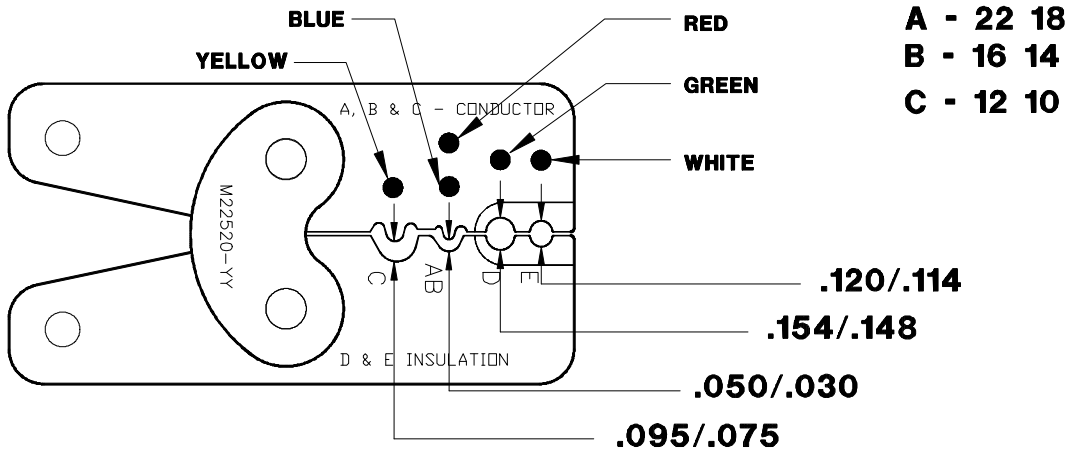



FIGURE 2. Nominal crimp cavity dimensions.

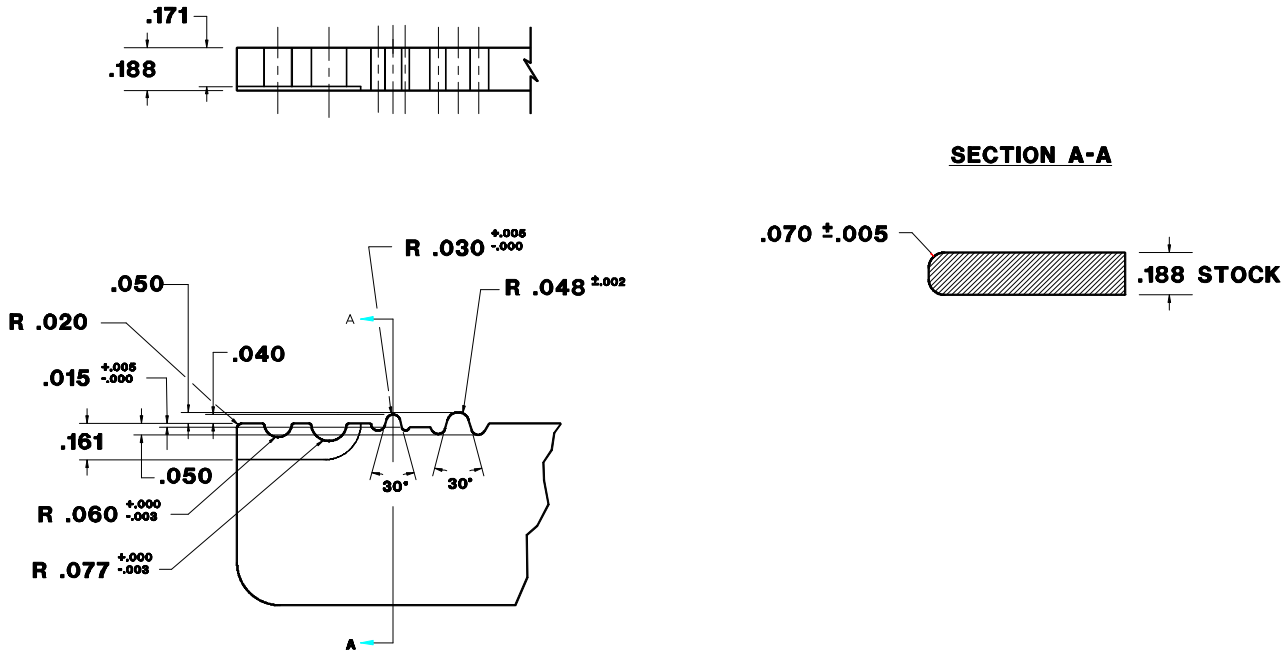

DETAIL 1. Indenter jaw.

FIGURE 3. Lug terminal and external power plug socket jaw.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:49Z
Check the source to verify that this is the current version before use.

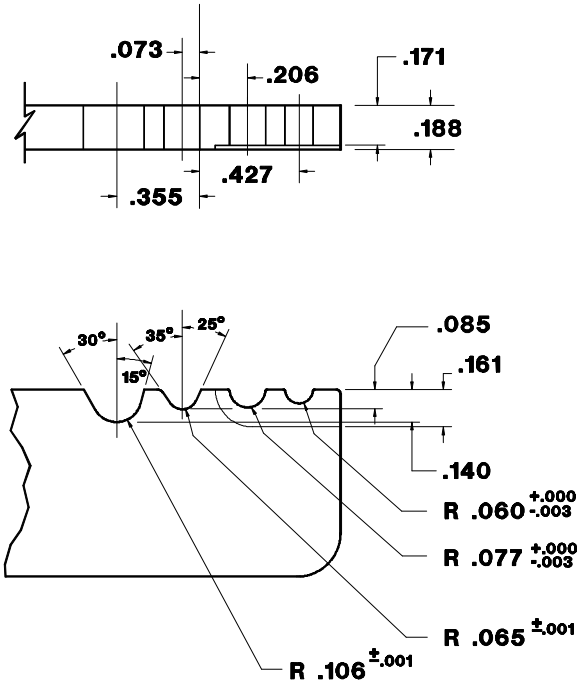

DETAIL 2. Nest jaw.

FIGURE 3. Lug terminal and external power plug socket jaw.- Continued.

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
0.001	0.03	0.048	1.22	0.114	2.90	0.355	10.16
0.002	0.05	0.050	1.27	0.120	3.05	0.400	10.85
0.003	0.08	0.060	1.52	0.140	3.56	0.550	13.97
0.005	0.13	0.065	1.65	0.148	3.76	0.605	15.37
0.010	0.25	0.070	1.78	0.151	3.84	0.955	24.26
0.015	0.38	0.073	1.85	0.154	3.91	1.625	41.28
0.016	0.41	0.075	1.91	0.156	3.96	3.000	63.20
0.020	0.51	0.077	1.96	0.161	4.09	9.000	228.60
0.030	0.76	0.085	2.16	0.171	4.34		
0.031	0.79	0.095	2.41	0.188	5.23		
0.040	1.02	0.106	2.69	0.206	9.02		

NOTES:

1. Outline configuration optional within maximum dimensions shown for a closed handle position.
2. Dimensions are in inches.
3. Metric equivalents are given only for general information and are based on 1.00 inch = 25.4 mm.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:49Z
Check the source to verify that this is the current version before use.

4. Unless otherwise specified, tolerances are ±0 .010 (0.25 mm) for three place decimals and ±0.5° for angles.
5. Complete manufacturer's name or logo in accordance with SAE-AIR1351 shall be permanently embossed or printed on the tool.
6. Refer to MIL-DTL-22520/39 for calibration and inspection gage.

REQUIREMENTS:

1. Tool shall not weigh in excess of 1.0 lb (0.45 kg).
2. Material: Jaws: - 50 point carbon min. alloy steel Heat Treat Rockwell C 43-54 or equivalent as approved by the qualifying activity.
   Handles - Steel or equivalent as approved by the qualifying activity.
   Grips - Plastic, rubber, or equivalent as approved by the qualifying activity (color optional).
3. Finish: Jaws and link - Black oxide or equivalent as approved by the qualifying activity.
   Handles - Nickel or chrome plating commercial grade or equivalent as approved by the qualifying activity.
4. Cycle control (ratchet) adjustment device shall be set to release between 40 to 50 pounds and permanently fixed in position so as to allow no adjustments in service.
5. Convex crimp surfaces shall be polished to 16 (RMS) microfinish.
6. Tool manufacturer shall supply instruction sheets with each tool which includes applications, usage, instructions and other necessary details.
7. Tool part number M22520/38-01.

APPLICATION:

The A, B, and C cavities are for crimping MS20659 terminal size 22 through 10 and the C cavity also is for crimping MS25486 external power plug socket contact size 12. The D and E cavities are for crimping the insulation grip on MS20659 terminal sizes 22-14.

SUPERSESSION DATA:

The following part numbers are superseded by M22520/38-01:

M22520/24-01, MS17776-1, and AN3428.

Custodians:
Army - CR
Navy - AS
Air Force - 85

Preparing Activity:
Navy - AS
(Project 5120-0085-015)

Review activities:
Navy - SH, EC, OS
DLA - ES

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:49Z
Check the source to verify that this is the current version before use.