INCH-POUND


MIL-DTL-22520/39
12 September 1997

DETAIL SPECIFICATION SHEET

CRIMPING TOOL, TERMINAL, HAND, ACTUATED, WIRE TERMINATION, IN-SERVICE INSPECTION GAGE FOR

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-22520 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

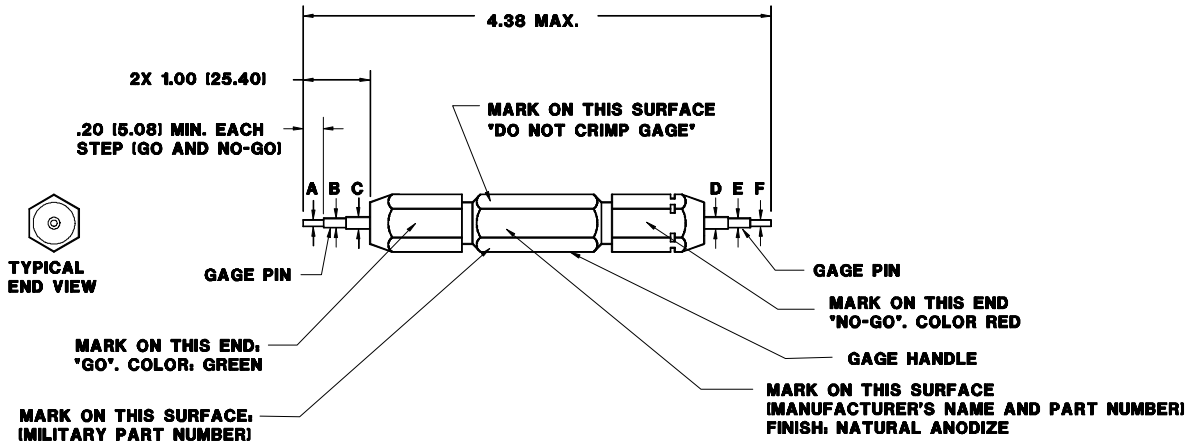

PART NUMBER
M22520/39-01

FIGURE 1. Gage for MIL-DTL-22520/37-01 crimping tool.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:50Z
Check the source to verify that this is the current version before use.

GAGE/CRIMP CAVITY APPLICATION


SURFACE	USE	M22520/37 COLOR CODE
A	GO A CAVITY	RED
B	GO B CAVITY	BLUE
C	GO C CAVITY	YELLOW
D	NO-GO C CAVITY	YELLOW
E	NO-GO B CAVITY	BLUE
F	NO-GO A CAVITY	RED

GO			NO-GO		
A	B	C	D	E	F
0.0250 (0.635)	0.0420 (1.067)	0.0620 (1.575)	0.0720 (1.829)	0.0520 (1.320)	0.0350 (0.889)

TOLERANCES: GO GAGE (A, B, C) +0.0005 (0.0127), -0.0000
NO-GO GAGE (D, E, F) +0.0000, -0.0005 (0.0127)
APPLICATION: MIL-DTL-22520/37-01

FIGURE 1. Gage for MIL-DTL-22520/37-01 crimping tool. - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:50Z
Check the source to verify that this is the current version before use.

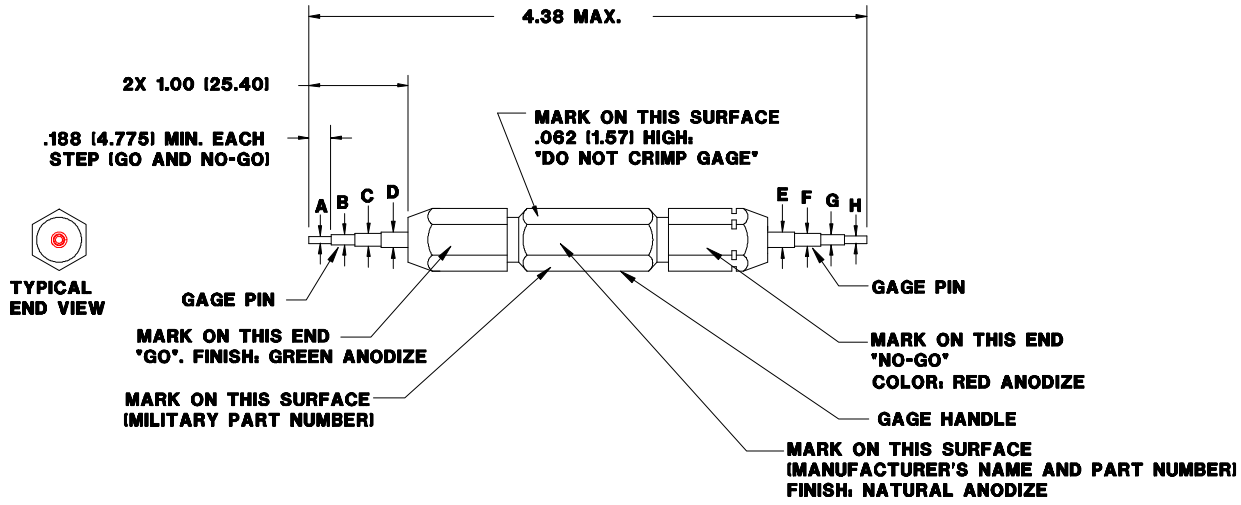

PART NUMBER
M22520/39-02

GAGE/CRIMP CAVITY APPLICATION

SURFACE	USE	COLOR CODE
A	GO/A/B CAVITY	RED/BLUE
B	GO/C CAVITY	YELLOW
C	GO/E CAVITY	WHITE
D	GO/D CAVITY	GREEN
E	NO-GO/D CAVITY	GREEN
F	NO-GO/E CAVITY	WHITE
G	NO-GO/C CAVITY	YELLOW
H	NO-GO/A-B CAVITY	RED/BLUE

GO				NO-GO			
A	B	C	D	E	F	G	H
0.030 (0.762)	0.0750 (1.905)	0.1140 (2.896)	0.1480 (3.760)	0.1540 (3.911)	0.1200 (3.048)	0.0950 (2.413)	0.0500 (1.27)

TOLERANCES: GO GAGE (A, B, C & D) +0.0005 (0.0127), -0.0000
NO-GO GAGE (E, F, G & H) +0.0000, -0.0005 (0.0127)
APPLICATION: MIL-DTL-22520/38-01

FIGURE 2. Gage for MIL-DTL-22520/38-01 crimping tool.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:50Z
Check the source to verify that this is the current version before use.

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (xxx) are given only for general information and are based on 1.00 inch = 25.4 mm.
3. Unless otherwise specified tolerances are ±0.010 (0.25) for three place decimals and ±0.5° for angles.
4. Break all sharp edges, 0.005 R max.

REQUIREMENTS:
1. Material: Gage pins - Alloy tool steel per ASTM-A681, class optional, harden to Rockwell C55-60 or equivalent as approved by the qualifying activity.
   Gage handle - Aluminum alloy per Department of Commerce Commercial Standard CS 8 or equivalent as approved by the qualifying activity.
2. Finish: Gage pins - Chrome flash, 0.0002 (0.0051) to 0.0003 (0.0076) thick, per QQ-C-320, class 2 or equivalent as approved by the qualifying activity.
3. Markings shall be indented.
4. Each gage shall be furnished with a container.

SUPERSESION DATA:
The following part numbers are superseded by M22520/39-01:
M22520/3-12 and M22520/3-13, and M22520/3-14.

Custodians:
Army - CR
Navy - AS
Air Force - 85

Preparing Activity:
Navy - AS
(Project 5220-0254)

Review Activities:
Army - MI, AR, AV
Navy - SH, EC, OS
Air Force - 11, 17, 99
DLA - CC

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:50Z
Check the source to verify that this is the current version before use.