DETAIL SPECIFICATION SHEET

GROMMET, CUSHION, COMPOSITE, EDGING

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-22529 listed in that issue of the Department of Defense Index of Specification and Standards (DoDISS) specified in the solicitation.

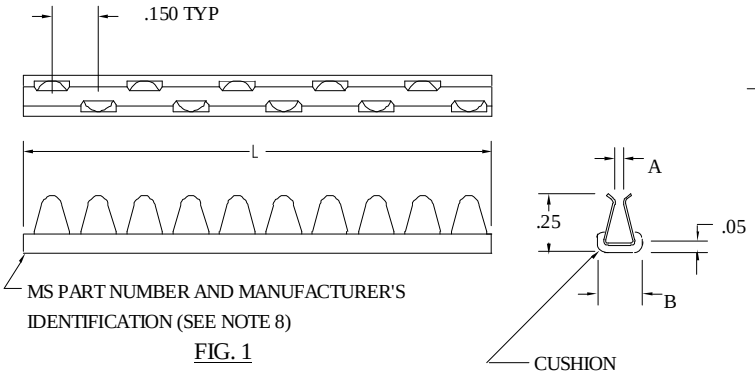

FIG. 1

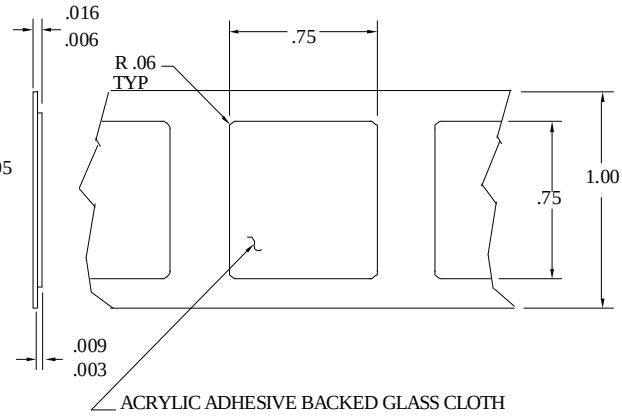

GAP FILLER

FIG. 2

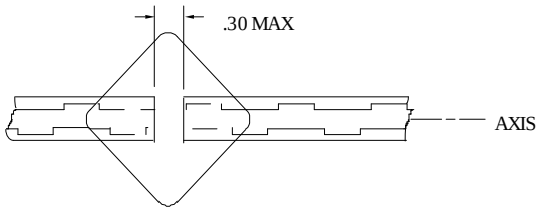

TOP ELEVATION

FIG. 3

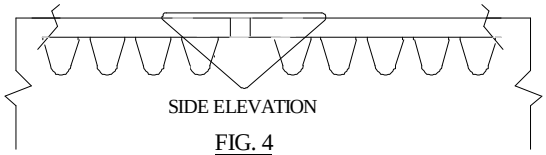

FIG. 4



FIG. 5

SHEARS, FULL BYPASS

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and data which may improve this document should be sent to: Defense Industrial Supply Center, attn.: DISC-ECC, 700 Robbins Avenue, Philadelphia, PA 19111-5096.

Distribution statement A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:53Z
Check the source to verify that this is the current version before use.

Table 1
Military Standard
part number & cross reference

Military Standard		Sheet	Unit		Device Technologies, Inc. Marlborough, MA 01752 Cage Code 0-HES-0
Part Number	Dash Variation	Thickness A	Length L	B	Part Number
M22529/2	-1R-25	.025	25 FT.	.200	BT1-25-ERB
	-1R-100	.036	100 FT.		BT1-100-ERB
	-2R-25	.036	25 FT.		BT2-25-ERB
	-2R-100	.063	100 FT.		BT2-100-ERB
	-3R-25	.059	25 FT.		BT3-25-ERB
	-3R-100	.074	100 FT.		BT3-100-ERB
	-4R-25	.070	25 FT.	.240	BT4-25-ERB
	-4R-100	.093	100 FT.		BT4-100-ERB
	-5R-25	.090	25 FT.		BT5-25-ERB
	-5R-100	.111	100 FT.		BT5-100-ERB
	-6R-25	.105	25 FT.		BT6-25-ERB
	-6R-100	.134	100 FT.		BT6-100-ERB
	-7R-25	.178	25 FT.	.	BT7-25-ERB
	-7R-100	.198	100 FT.	.32	BT7-100-ERB
	-8R-25	.240	25 FT.		BT8-25-ERB
	-8R-100	.260	100 FT.	.38	BT8-100-ERB
	-GF	Gap Filler			GF100
MFE-100		Shear, full bypass			No. 440

Table 2
Circular hole
grommet edging cut lengths

Note: cut length is a multiple of .15 inches (Fig 1)

Nominal	Cut Length	
Hole Diameter Reference	L Length	Number of Castles
2.00	6.00	40
2.250	6.90	46
2.500	7.65	51
2.750	8.40	56
3.000	9.15	61
3.250	10.05	67
3.500	10.80	72
3.750	11.55	77
4.000	12.30	82
4.250	13.20	88
4.500	13.95	93
4.750	14.70	98
5.000	15.45	103
5.250	16.35	109
5.500	17.10	114
5.750	17.85	119
6.000	18.60	124

Requirements:

1 Materials:

1.1 Substrate: -1 thru -7, 1/4 hard 300 series stainless steel; -8, 1/2 hard 300 series stainless steel.

1.2 Coating: Nylon 11, Color: Black.

1.2.1 Elastomer Cushion: Shore A 90 Durometer. Flammability UL94V-0, Color: Black.

1.2.2 Elongation: No cracks at 15% elongation.

1.2.3 Thermal endurance: 85°C continuous (2,000 Hrs).

2 The composite cushion grommet meets all the requirements of MIL-DTL-22529(AS) with the following exception: 4.2.9 Dielectric with-standing voltage, 500 volts, 60 Hz. This grommet is primarily intended to provide chafing protection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:53Z
Check the source to verify that this is the current version before use.

3 Examples of Part Number:

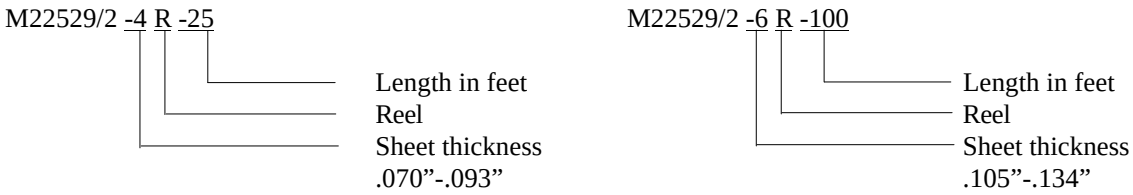

Notes:

1 Tolerances: .XX = ±.02; .XXX = ±.010

2 The Government shall procure stock grommet edging on 25’ and 100’ reels and when required Gap fillers per Fig 2, Table 1

3 The installing activity shall fabricate grommets using MFE-100 shears per fig 5.

4 Within a given sheet thickness range and spring characteristic of the grommet, end user should determine the grommet size by trial.

5 Composite Grommet Edgings are to be used for edge dressing, odd-shaped holes, and circular holes to provide chafing protection.

6 Installation:

6.1 The maximum allowable end gap for odd-shaped and circular holes after grommet edging is installed flush against the hole periphery is per Fig 3.

6.2 When the gap must be closed, peel the Gap Filler from the carrier strip and apply the Gap Filler centrally to the gap and diagonally along the axis of the grommet per Fig 3. Apply a wiping finger pressure until the Gap Filler is secured over the terminal ends of the grommet application panel per Fig 4.

6.3 Installation instructions per Fig 3, 4, 5, are to be included with each package.

6.4 When installing grommets, the gap (joint) shall be at the top of the cutout hole. Avoid locating joints in the lower half of the cutout hole. In application where there is more than a single axis mode, a pressure sensitive Gap Filler per Fig. 2 may be used per Fig. 3 and 4.

7. U.S. Patent No’s 4,769,966 and 5,343,669 expire September 14, 2005 and September 7, 2011 respectively. Other U.S. and foreign patents pending. The Government does not have a royalty-free license.

8 The military detail part number, single-digit dash variation, and manufacturer’s identification to be printed and repeated on the surface of the grommet at least every 10.6 in. per Fig 1.

Custodians:
Navy - AS
Air Force - 99

Review Activities:
Air Force - 82

Preparing Activity:
DLA-IS

(Project 5325-0339)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:53Z
Check the source to verify that this is the current version before use.