MIL-D-22531A(WEP)
AMENDMENT 2
1 JUNE 1964

SUPERSEDING
AMENDMENT 1
26 MARCH 1964

MILITARY SPECIFICATION

DISPLAY-PLOTTING BOARD GROUP OA-1768(*)/ASA-13

This amendment forms a part of Military Specification MIL-D-22531A(Wep) dated 10 August 1961 and has been approved by the Bureau of Naval Weapons, Department of the Navy

Page 3, paragraph 3.2.2: Delete "35.75" and substitute "37.5"

Page 4, paragraph 3.2.14: Delete "4 amps" and substitute "4.3 amps"

Page 7, paragraph 3.4.1.1: Delete "between 0.004 inch and 0.010 inch wide" and substitute "between 0.010 inch and 0.015 inch wide." Add after last sentence in paragraph, "A grid overlay rotatable cursor shall be provided for approximating range and bearing between position references."

Page 7, paragraph 3.4.1.3: Delete "and film transport controls" and substitute "film transport controls, and bezel illumination." Add "(4) Rotatable cursor."

Page 7, paragraph 3.4.1.4: Delete "30.0" and substitute "31.75"

Page 8, paragraph 3.4.1.6: Delete "other than the manual film transport knobs. "and substitute "other than the manual film transport knobs and the bezel illumination control".

Page 9, paragraph 3.4.1.16: Delete entire paragraph and substitute:

"3.4.1.16 Lighting - Integral back lighting shall be provided for the unit. The light provided shall be red light uniformly diffused over the plotting area. Integral back lighting in conjunction with suitable plotter film shall assure visible traces during night and day operations."

"3.4.1.16.1 Light Distribution - Uniform light distribution of the back lighted plotter film shall be within a ratio to 5:1 between the dimmest and brightest area."

"3.4.1.16.2 Contrast, Back Lighting - The contrast between traces and background illumination shall not be less than 1.5, when the integral lighting system is energized with the dimmer control in the position for maximum light intensity. Contrast (C) is defined as:

$$C = \frac{B_2}{B_1}$$

where B_1 is the average brightness of the background and B_2 is the average brightness of the trace."

"3.4.1.16.3 Contrast, Crab Lighting - The contrast between crab arrow lighting and background illumination shall not be less than 3, when the integral lighting system is energized with the dimmer control in the position for maximum light intensity. Contrast (C) is defined as:


$$C = \frac{B_4}{B_3}$$

where B_3 is the average brightness of the background and B4 is the average brightness of the arrow."

Page 20: Delete figure 1 and substitute new figure 1B.

FSC 5841

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:53Z
Check the source to verify that this is the current version before use.

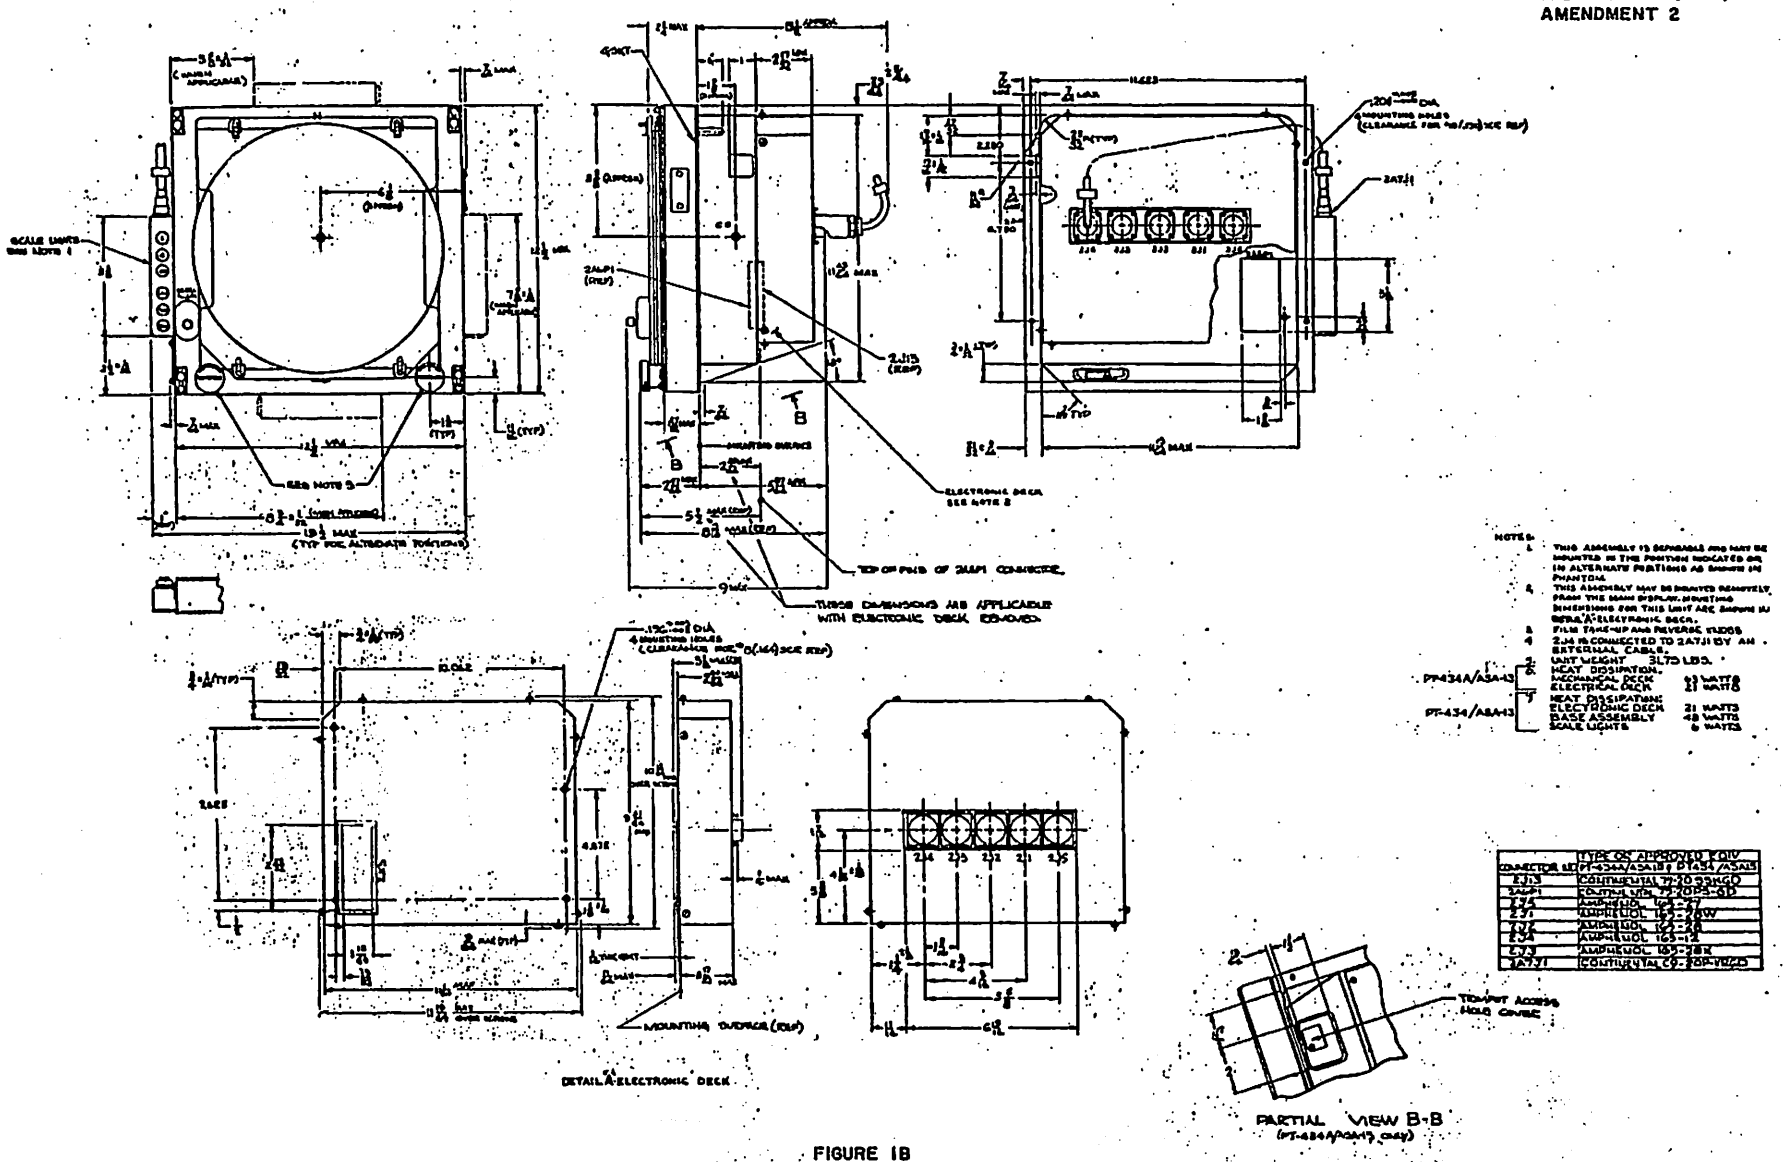

NOTES:
1. THIS ASSEMBLY IS REMOVABLE AND MAY BE MOUNTED IN THE POSITION INDICATED OR IN ALTERNATE POSITIONS AS SHOWN IN PHANTOM.
4. THIS ASSEMBLY MAY BE MOUNTED REMOTELY FROM THE MAIN DISPLAY. MOUNTING DIMENSIONS FOR THIS UNIT ARE SHOWN IN DETAIL A-ELECTRONIC DECK.
5. FILM TAKE-UP AND REVERSE KNOBS
6. 2J4 IS CONNECTED TO 2AT1 BY AN EXTERNAL CABLE.
7. UNIT WEIGHT 3L75 LBS.
8. HEAT DISSIPATION:

PT-434A/A9A43	MECHANICAL DECK	23 WATTS
	ELECTRICAL DECK	21 WATTS
PT-434/A8A43	HEAT DISSIPATION:	
	ELECTRONIC DECK	21 WATTS
	BASE ASSEMBLY	48 WATTS
	SCALE LIGHTS	6 WATTS

CONNECTOR ID	TYPE OR APPROVED EQUIV PT-434A/A9A43	PT-434/A8A43
2J13	CONTINENTAL 77-20-22SNGD	
2AJP1	CONTINENTAL 77-20P-GD	
2J4	AMPHENOL 165-47	
2J1	AMPHENOL 165-48W	
2J2	AMPHENOL 165-48	
2J4	AMPHENOL 165-12	
2J5	AMPHENOL 165-38K	
2AT1	CONTINENTAL 69-20P-VNGD	

FIGURE 1B

Source: https://assist.dla.mil -- Downloaded: 2022010-19T12:53Z
Check the source to verify that this is the current version before use.