The documentation and process conversion measures necessary to comply with this revision shall be completed by 2 February 1999

INCH-POUND

MIL-PRF-19500/575B
2 November 1998
SUPERSEDING
MIL-S-19500/575A
30 September 1993

PERFORMANCE SPECIFICATION SHEET

SEMICONDUCTOR DEVICE, DIODE, SILICON, HIGH VOLTAGE POWER RECTIFIER,
FAST RECOVERY, TYPES 1N6512 THROUGH 1N6519, 1N6512US THROUGH 1N6519US
JAN, JANTX, JANTXV, AND JANS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the performance requirements for silicon, high voltage, fast recovery power rectifier diodes. Four levels of product assurance are provided for each device as specified in MIL-PRF-19500.

1.2 Physical dimensions. See figures 1 and 2.

1.3 Maximum ratings.

Types	V_{RWM}	I_{FSM}	I_O		t_{rr}	T_{STG}	T_J	$R_{\theta JL}$ L =.25	$R_{\theta JT}$ 3/
		t_p = 8.3 ms	T_A= +55°C 1/	T_A= +100°C 2/					
	V dc	A (pk)	A dc	A dc	ns	°C	°C	°C/W	°C/W
1N6512, 1N6512US	1,500	100	1.5	1.0	70	-65 to +200	-65 to +175	12	4
1N6513, 1N6513US	2,000	100	1.5	1.0	70	-65 to +200	-65 to +175	12	4
1N6514, 1N6514US	2,500	60	1.0	0.65	70	-65 to +200	-65 to +175	12	4
1N6515, 1N6515US	3,000	60	1.0	0.65	70	-65 to +200	-65 to +175	12	4
1N6516, 1N6516US	4,000	40	0.75	0.5	70	-65 to +200	-65 to +175	12	5
1N6517, 1N6517US	5,000	40	0.75	0.5	70	-65 to +200	-65 to +175	12	5
1N6518, 1N6518US	7,500	25	0.5	0.35	70	-65 to +200	-65 to +175	12	5
1N6519, 1N6519US	10,000	25	0.5	0.35	70	-65 to +200	-65 to +175	12	5

1/ Derate linearly for +55°C ≤ T_A ≤ +100°C. I_O at T_A = +55°C to I_O at T_A = +100°C.
2/ Derate linearly for +100°C ≤ T_A ≤ +175°C. I_O at T_A = +100°C to I_O at T_A = +0°C.
3/ $R_{\theta JT}$ is junction to tab thermal impedance with "US" suffix identification, i.e., 1N6512US. Surface mount types, see figure 2.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, Defense Supply Center Columbus, ATTN: DSCC-VAT, 3990 East Broad Street, Columbus, OH 43216-5000, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:33Z
Check the source to verify that this is the current version before use.

1.4 Primary electrical characteristics.

Types	V_{RWM}	I_O T_A = +55°C	I_{R1} T_A = +25°C	V_{F1} at I_O	C at V_R = 50 V F_O = 1 kHz	Barometric pressure (reduced) t = 1 minute (minimum)
	V dc	A dc	µA dc	V (pk)	pF	mmHg
1N6512, 1N6512US	1,500	1.5	1.0	3.5	25	8
1N6513, 1N6513US	2,000	1.5	1.0	3.5	25	8
1N6514, 1N6514US	2,500	1.0	1.0	6.0	20	8
1N6515, 1N6515US	3,000	1.0	1.0	6.0	20	8
1N6516, 1N6516US	4,000	0.75	1.0	8.0	16	8
1N6517, 1N6517US	5,000	0.75	1.0	8.0	16	8
1N6518, 1N6518US	7,500	0.5	1.0	13.0	8	8
1N6519, 1N6519US	10,000	0.5	1.0	13.0	8	8

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATION

DEPARTMENT OF DEFENSE

MIL-PRF-19500 - Semiconductor Devices, General Specification for.

STANDARD


MILITARY

MIL-STD-750 - Test Methods for Semiconductor Devices.

(Unless otherwise indicated, copies of the above specifications, standards, and handbooks are available from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein (except for related associated specifications or specification sheets), the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:33Z
Check the source to verify that this is the current version before use.

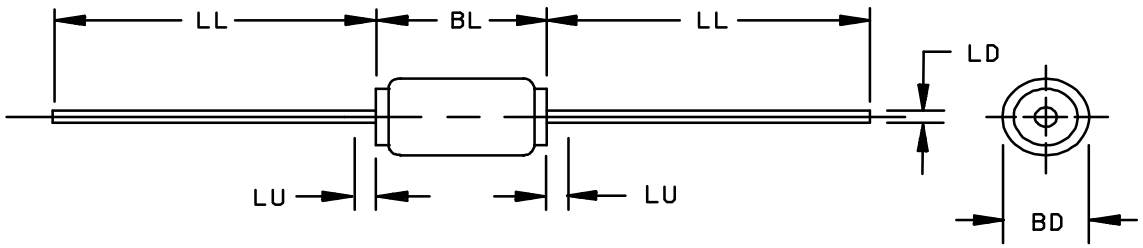


PIN	Dimensions															
	BL				LL				LD				BD			
	Inches		Millimeters		Inches		Millimeters		Inches		Millimeters		Inches		Millimeters	
	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
1N6512	0.25	0.31	6.35	7.87	1.0	1.3	25.4	33.0	.037	.043	0.94	1.09	.155	.215	3.94	5.46
1N6513	0.25	0.31	6.35	7.87	"	"	"	"	"	"	"	"	"	"	"	"
1N6514	0.27	0.33	6.86	8.38	"	"	"	"	"	"	"	"	"	"	"	"
1N6515	0.27	0.33	6.86	8.38	"	"	"	"	"	"	"	"	"	"	"	"
1N6516	0.29	0.35	7.37	8.9	"	"	"	"	"	"	"	"	"	"	"	"
1N6517	0.29	0.35	7.37	8.9	"	"	"	"	"	"	"	"	"	"	"	"
1N6518	0.34	0.40	8.64	10.2	"	"	"	"	"	"	"	"	"	"	"	"
1N6519	0.34	0.40	8.64	10.2	"	"	"	"	"	"	"	"	"	"	"	"

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. The specified lead diameter applies in the zone between 0.05 inch (1.27 mm) from the body to the end of the lead. Outside of this zone lead shall not exceed the body diameter.
4. Dimension LU defines region of uncontrolled diameter 0.050 inches max (1.27 mm).

FIGURE 1. Physical dimensions (for non-US suffix devices only).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:33Z
Check the source to verify that this is the current version before use.

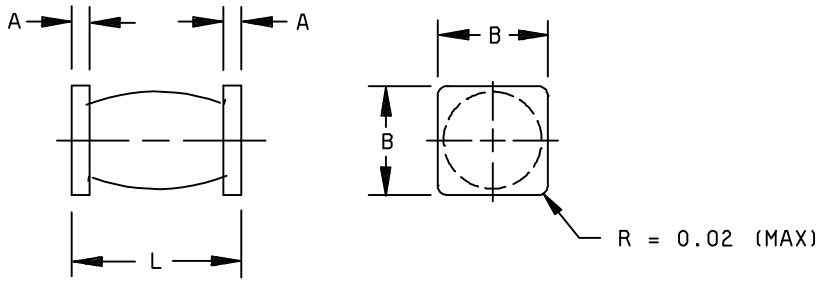

PIN	Dimensions											
	L				A				B			
	Inches		Millimeters		Inches		Millimeters		Inches		Millimeters	
	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
1N6512US	0.225	0.245	5.72	6.22	.026	.036	0.66	0.91	.170	.180	4.32	4.57
1N6513US	0.225	0.245	5.72	6.22	"	"	"	"	"	"	"	"
1N6514US	0.245	0.265	6.22	6.73	"	"	"	"	"	"	"	"
1N6515US	0.245	0.265	6.22	6.73	"	"	"	"	"	"	"	"
1N6516US	0.265	0.285	6.73	7.24	"	"	"	"	"	"	"	"
1N6517US	0.265	0.285	6.73	7.24	"	"	"	"	"	"	"	"
1N6518US	0.325	0.345	8.26	8.76	"	"	"	"	"	"	"	"
1N6519US	0.325	0.345	8.26	8.76	"	"	"	"	"	"	"	"

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Dimensions are pre-solder dip.

FIGURE 2. Physical dimensions (surface mount devices).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:33Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Qualification. Devices furnished under this specification shall be products that are authorized by the qualifying activity for listing on the applicable qualified products list before contract award (see 4.2 and 6.3).

3.2 Associated specification. The individual item performance requirements shall be in accordance with MIL-PRF-19500, and as specified herein.

3.3 Abbreviations, symbols, and definitions. Abbreviations, symbols, and definitions used herein shall be as specified in MIL-PRF-19500.

3.4 Interface requirements and physical dimensions. The interface requirements and physical dimensions for the purpose of interchangeability shall be as specified on figures 1 and 2 herein. Plastic packages are prohibited. The US Government's preferred system of measurement is the metric SI system. However, since this item was originally designed using inch-pound units of measurement, in the event of conflict between the metric and inch-pound units, the inch-pound units shall take precedence.

3.4.1 Lead material and finish. Lead material shall be type C, 99.9 percent silver or copper in accordance with MIL-STD-1276. Lead finish shall be in accordance with MIL-PRF-19500 and MIL-STD-750. Where a choice of lead finish is desired, it shall be specified in the acquisition document (see 6.2).

3.4.2 Diode construction. These devices shall be constructed in a manner and using materials which enable the diodes to meet the applicable requirements of MIL-PRF-19500 and this document.

3.4.2.1 Surface mount. The surface mount (US) version shall be considered structurally identical to the non surface mount version except for lead attach.

3.5 Marking. Devices shall be marked as specified in MIL-PRF-19500.

3.5.1 Marking for surface mount (US) devices. Surface mount (US) suffix parts are to be marked with the polarity identification. Initial container package marking will be in accordance with MIL-PRF-19500.

3.6 Electrical performance characteristics. Unless otherwise specified herein, the electrical performance characteristics are as specified in 1.3, 1.4, and table I herein.

3.7 Electrical test requirements. The electrical test requirements shall be the subgroups specified in 4.4.2 and 4.4.3.

4. VERIFICATION

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. Qualification inspection (see 4.2).

b. Screening (see 4.3).

c. Conformance inspection (see 4.4).

4.2 Qualification inspection. Qualification inspection shall be in accordance with MIL-PRF-19500.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:33Z
Check the source to verify that this is the current version before use.

4.3 Screening (JAN, JANTX, JANTXV, and JANS levels only). Screening shall be in accordance with of MIL-PRF-19500 (appendix E, table IV), and as specified herein. The following measurements shall be made in accordance with table I herein. Devices that exceed the limits of table I herein shall not be acceptable.

Screen (see appendix E, table IV of MIL-PRF-19500)	Measurement	
	JANS	JANTX and JANTXV levels
1/	Surge, see 4.3.2	Surge, see 4.3.2
9	I_{R1} and V_{F1}	Not applicable
11	I_{R1} and V_{F1}; ΔI_{R1} and ΔV_{F1}, see table II herein	I_{R1} and V_{F1}
12	See 4.3.1	See 4.3.1
13	Subgroups 2 and 3 of table I herein: ΔI_{R1} and ΔV_{F1}, see table II herein ; $I_{R1}$and V_{F1}	Subgroup 2 of table I herein; ΔI_{R1}, ΔV_{F1} see table II herein. I_{R1} and V_{F1}

1/ Surge screening shall be performed anytime after screen 3 and before screen 10.

4.3.1 Power burn-in conditions. Power burn-in conditions are as follows: Method 1038, condition B of MIL-STD-750, T_A = room ambient as defined in the general requirements in 4.5 of MIL-STD-750, V_{RWM} = 1,000; f ≥ 60 Hz.

Types	I_O (A dc)
1N6512, 1N6512US 1N6513, 1N6513US	1.5
1N6514, 1N6514US 1N6515, 1N6515US	1.0
1N6516, 1N6516US 1N6517, 1N6517US	0.75
1N6518, 1N6518US 1N6519, 1N6519US	0.5

4.3.2 Surge screening. MIL-STD-750, method 4066; T_A = +25°C, V_{RWM} = 0. Six surges. Apply 20 x I_O rated at T_A = 55°C, 8.3 ms.

4.4 Conformance inspection. Conformance inspection shall be in accordance with MIL-PRF-19500.

4.4.1 Group A inspection. Group A inspection shall be conducted in accordance with MIL-PRF-19500 appendix E, table V, and table I herein

4.4.2 Group B inspection. Group B inspection shall be conducted in accordance with the conditions specified for subgroup testing in appendix E, tables Via (JANS) and VIb (JAN, JANTX, and JANTXV) of MIL-PRF-19500 and as follows. Electrical measurements (end-points) and delta requirements shall be in accordance with the applicable steps of table II herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:33Z
Check the source to verify that this is the current version before use.

4.4.2.1 Group B inspection, appendix E, table VIa (JANS) of MIL-PRF-19500.

Subgroup	Method	Condition
B3	4066	I_O at T_A = 55°C, I_{FSM} = rated I_{FSM}, see 1.3, one surge, 8.3 ms, V_{RWM} = 0 V.
B4	1037	See 4.3.1, $t_{on} = t_{off}$ = 3 minutes minimum, 2,000 cycles.
B5	1027	T_A = +150°C minimum, I_O = rated I_O (see 1.3) or adjust I_O and T_A as required to achieve T_J = +275°C for a minimum of 96 hours at V_{RWM} = 1,000 V.
B6	4081	T_A = +25°C; $R_{\theta JL}$ = rated $R_{\theta JL}$ (see 1.3); $R_{\theta JT}$ = rated $R_{\theta JT}$ (see 1.3).

4.4.2.2 Group B inspection, appendix E table VIb (JAN, JANTX, and JANTXV of MIL-PRF-19500).

Subgroup	Method	Condition
B2	4066	$I_O = I_O$ at T_A = 55°C one surge, 8.3 ms; I_{FSM} = rated I_{FSM} (see 1.3), V_{RWM} = 0 V.
B4	1027	T_A = room ambient as defined in the general requirements in 4.5 of MIL-STD-750 minimum, I_O = rated I_O (see 4.3.1); adjust I_O or T_A as required to achieve $T_J \geq$ +125°C, V_{RWM} = 1,000 V.
B5	4081	T_A = +25°C; $R_{\theta JL}$ = rated $R_{\theta JL}$ (see 1.3); $R_{\theta JT}$ = rated $R_{\theta JT}$ (see 1.3).

4.4.3 Group C inspection. Group C inspection shall be conducted in accordance with the conditions specified for subgroup testing in appendix E, table VII of MIL-PRF-19500. Electrical measurements (end-points) shall be in accordance with the applicable inspections of table II herein.

4.4.3.1 Group C inspection, appendix E, table VII of MIL-PRF-19500.

Subgroup	Method	Condition
C2	2036	Test condition A, weight = 20 lbs, t = 30s.
C5	1001	V_R = rated V_R (see 1.3), pressure = 8 mmHg, t = 1 minute (minimum), sampling plan = 22 devices, c = 0.
C6	1027	T_A = +25°C minimum, I_O = rated I_O (see 4.3.1) I_O = rated I_O; adjust I_O or T_A as required to achieve $T_J \geq$ +125°C, V_{RWM} = 1,000 V.

4.5 Methods of inspection. Methods of inspection shall be specified in the appropriate tables and as follows.

4.5.1 Pulse measurements. Conditions for pulse measurement shall be as specified in section 4 of MIL-STD-750.

4.5.2 Inspection of conditions. Unless otherwise specified, all inspections shall be conducted at an ambient T_A = +25°C ± 3°C.

4.5.3 Reverse-recovery time. The reverse recovery time shall be measured in the circuit on figure 3 or an equivalent circuit. The recovery conditions shall be 0.5 A forward current to 1.0 A reverse current. The reverse recovery time is defined as the time the rectifier begins to conduct in the reverse direction (crosses I = zero) until the reverse current decays to -0.25 A. The point of contact on the leads shall be no less than .375 inch (9.52 mm) from the diode body for leaded devices. Point of contact shall be the mounting surface for surface mounted devices with "U" suffixes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:33Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection.

Inspection	MIL-STD-750		Symbol	Limits		Unit
	Method	Conditions		Min	Max	
Subgroup 1						
Visual and mechanical inspection	2071					
Subgroup 2						
Forward voltage	4011		V_{F1}			
1N6512, 1N6512US 1N6513, 1N6513US		I_F = 1.5 A			3.5	V dc
1N6514, 1N6514US 1N6515, 1N6515US		I_F = 1.0 A			6.0	V dc
1N6516, 1N6516US 1N6515, 1N6515US		I_F = 0.75 A			8.0	V dc
1N6518, 1N6518US 1N6519, 1N6519US		I_F = 0.5 A			13.0	V dc
Reverse current leakage	4016	DC method; V_R = rated V_R (see 1.3)	I_{R1}		1.0	µA dc
Breakdown voltage	4021	I_R = 50 µA	$V_{(BR)R1}$			
1N6512, 1N6512US 1N6513, 1N6513US				1,650 2,200		V dc
1N6514, 1N6514US 1N6515, 1N6515US				2,750 3,300		V dc
1N6516, 1N6516US 1N6517, 1N6517US				4,400 5,500		V dc
1N6518, 1N6518US 1N6519, 1N6519US				8,250 11,000		V dc
Subgroup 3						
High temperature operation:		T_A = +150°C				
Reverse current leakage	4016	DC method; V_R = rated V_R (see 1.3)	I_{R2}		500	µA dc

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:33Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection - Continued.

Inspection	MIL-STD-750		Symbol	Limits		Unit
	Method	Conditions		Min	Max	
Subgroup 3 - Continued						
Low temperature operation:		T_A = - 55°C				
Forward voltage	4011		V_{F2}			
1N6512, 1N6512US 1N6513, 1N6513US		I_F = 1.5 A			5.6	V dc
1N6514, 1N6514US 1N6515, 1N6515US		I_F = 1.0 A			9.6	V dc
1N6516, 1N6516US 1N6517, 1N6517US		I_F = 0.75 A			12.8	V dc
1N6518, 1N6518US 1N6519, 1N6519US		I_F = 0.5 A			20.8	V dc
Breakdown voltage	4021	I_R = 50 µA	$V_{(BR)R2}$			V dc
1N6512, 1N6512US				1,500		
1N6513, 1N6513US				2,000		
1N6514, 1N6514US				2,500		
1N6515, 1N6515US				3,000		
1N6516, 1N6516US				4,000		
1N6517, 1N6517US				5,000		
1N6518, 1N6518US				7,500		
1N6519, 1N6519US				10,000		
Subgroup 4						
Reverse recovery time		See 4.5.3 and figure 3	t_{rr}		70	ns
Capacitance	4001	V_R = 50 V dc; 1 kHz ≤ f ≤ 100 kHz	C			
1N6512, 1N6512US 1N6513, 1N6513US					25	pF
1N6514, 1N6514US 1N6515, 1N6515US					20	pF
1N6516, 1N6516US 1N6517, 1N6517US					16	pF
1N6518, 1N6518US 1N6519, 1N6519US					8	pF
Subgroups 5, 6, and 7						
Not applicable						

1/ For sampling plan, see MIL-PRF-19500.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:33Z
Check the source to verify that this is the current version before use.

TABLE II. Groups B and C electrical measurements. 1/ 2/ 3/

Step	Inspection	MIL-STD-750		Symbol	Limits		Unit
		Method	Conditions		Min	Max	
1.	Forward voltage	4011	Pulsed (see 4.5.1)	V_{F1}			
	1N6512, 1N6512US 1N6513, 1N6513US		I_F = 1.5 A			3.5	V (pk)
	1N6514, 1N6514US 1N6515, 1N6515US		I_F = 1.0 A			6.0	V (pk)
	1N6516, 1N6516US 1N6517, 1N6517US		I_F = 0.75 A			8.0	V (pk)
	1N6518, 1N6518US 1N6519, 1N6519US		I_F = 0.5 A			13.0	V (pk)
2.	Reverse current	4016	DC method, V_R = rated V_R (see 1.3)	I_{R1}		1.0	µA dc
3.	Reverse recovery time		See 4.5.3 and figure 3	t_{rr}		70	ns
4.	Capacitance	4001	V_R = 50 V dc, 1 kHz ≤ f ≤ 100 kHz	C			
	1N6512, 1N6512US 1N6513, 1N6513US					25	pF
	1N6514, 1N6514US 1N6515, 1N6515US					20	pF
	1N6516, 1N6516US 1N6517, 1N6517US					16	pF
	1N6518, 1N6518US 1N6519, 1N6519US					8	pF
5.	Forward voltage	4011	Pulsed (see 4.5.1)	ΔV_{F1}			
	1N6512, 1N6512US 1N6513, 1N6513US		I_F = 1.5 A			± 0.2	V (pk)
	1N6514, 1N6514US 1N6515, 1N6515US		I_F = 1.0 A			± 0.4	V (pk)
	1N6516, 1N6516US 1N6517, 1N6517US		I_F = 0.75 A			± 0.8	V (pk)
	1N6518, 1N6518US 1N6519, 1N6519US		I_F = 0.5 A			± 1.2	V (pk)
6.	Reverse current	4016	DC method	ΔI_{R1}		± 250 nA dc or100 percent, whichever is greater.	

See footnotes at top of next page.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:33Z
Check the source to verify that this is the current version before use.

TABLE II. Groups B and C electrical measurements - Continued. 1/ 2/ 3/

1/ The electrical measurements for appendix E, table VIa (JANS) of MIL-PRF-19500 are as follows:

a. Subgroup 3, see table II herein, steps 1, 2, 3, 4, 5, and 6.

b. Subgroup 4, see table II herein, steps 1, 2, 3, 4, 5, and 6.

c. Subgroup 5, see table II herein, steps 1, 2, 3, 4, 5, and 6.

2/ The electrical measurements for appendix E, table VIb (JANTX and JANTXV) of MIL-PRF-19500 are as follows:

a. Subgroup 2, see table II herein, steps 1, 2, and 3.

b. Subgroup 3, see table II herein, steps 1, 2, 3, and 4.

c. Subgroup 6, see table II herein, steps 1, 2, 3, and 4.


3/ The electrical measurements for appendix E, table VII of MIL-PRF-19500 are as follows:

a. Subgroup 2, see table II herein, steps 1, 2, 3, 4, 5, and 6 (JANS); and steps 1, 2, and 3 (JANTX and JANTXV).

b. Subgroup 3, see table II herein, steps 2 and 3.

c. Subgroup 6, see table II herein, steps 1, 2, 3, 4, 5, and 6 (JANS); and steps 1, 2, 3, 4, and 5 (JANTX and JANTXV).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:33Z
Check the source to verify that this is the current version before use.

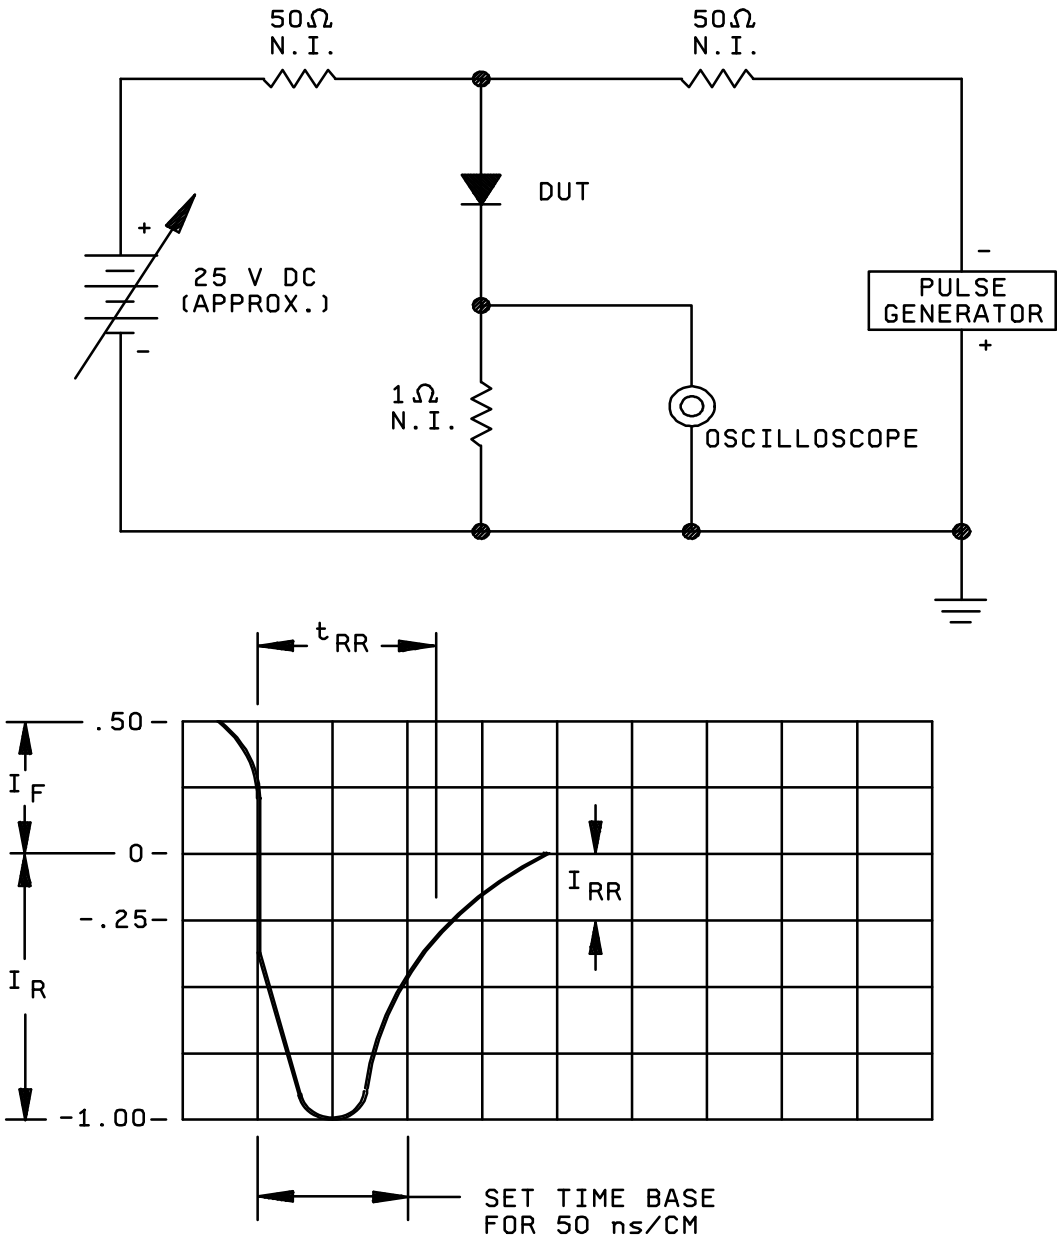

NOTES:

1. Oscilloscope-rise time ≤ 7 ns; input impedance = 1 megohm; 22 pF.
2. Pulse generator - rise time ≤ 10 ns; source impedance 50 ohms.
3. Recovery time shall be measured on the above circuit and with equipment as shown. The pulse generator shall have a pulse repetition frequency of 1 kHz and a pulse width of 200 ns recovery conditions .50 A forward current to 1.00 A reverse current. Recovery time measured when rectifier recovers to .25 A.

FIGURE 3. Reverse recovery time test circuit and characteristic nomograph.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:33Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Packaging. Packaging shall prevent mechanical damage of the devices during shipping and handling and shall not be detrimental to the device. When actual packaging of material is to be performed by DoD personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are maintained by the Inventory Control Points' packaging activity within the Military Department or Defense Agency, or within the Military Departments' System Command. Packaging data retrieval is available from the managing Military Departments' or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

5.2 Marking. Unless otherwise specified (see 6.2), marking shall be in accordance with MIL-PRF-19500.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Notes. The notes specified in MIL-PRF-19500 are applicable to this specification.

6.2 Acquisition requirements. See MIL- PRF-19500.

6.3 Qualification. With respect to products requiring qualification, awards will be made only for products which are, at the time of award of contract, qualified for inclusion in Qualified Products List QPL No.19500 whether or not such products have actually been so listed by that date. The attention of the contractors is called to these requirements, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be eligible to be awarded contracts or purchase orders for the products covered by this specification. Information pertaining to qualification of products may be obtained from Defense Supply Center Columbus, DSCC - VQE, 3990 E. Broad Street, Columbus, OH 43216.

6.4 Supersession information. Devices covered by this specification supersedes the manufacturers' and users' Part or Identifying Number (PIN). This information in no way implies that manufacturers' PIN are suitable as a substitute for the military PIN.

PIN	Manufacturer's CAGE code	Manufacturer's and user's PIN
1N6512	36378	1008611
	26916	019-006069-001
	94117	194078P1
		194078P2
	14482	711773-005
	60211	Z15UFG
		RZ110
		RZ111
		Z15FG
1N6513	9062	86A0095-6
	26916	019-006069-002
	94117	194078P4
	14482	711773-008
	60211	RZ192
		Z20UFG
		RZ112
		Z20FG
1N6514	58260	13079891
	26916	019-006069-003
	94117	194078P5
	14482	711773-011
	60211	Z25FG
		Z25UFG
		RZ113

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:33Z
Check the source to verify that this is the current version before use.

PIN	Manufacturer's CAGE code	Manufacturer's and user's PIN
1N6515	26916	019-006069-004
	94117	194078P6
	14482	711773-015
	60211	Z30UFG
		Z30FG
		RZ114
1N6516	23280	4-21347
	9062	86A00095-1
	26916	019-006069-005
	94117	194078P7
	64597	7117072
	14482	711773-017
	60211	Z40UFG
		RZ164
		RZ115
		Z40FG
1N6517	27206	10015
	55939	7013153
	9062	86A0095-4
		86A0095-5
	95542	941-107
	26916	019-006069-006
	49956	G333393-1
		G339357
	94117	194078P8
	64597	206823
	96214	2881055
	23426	28047-1
	14482	711773-018
	60211	RZ107
		RZ172
		RZ184
		RZ185
		Z50UFG
		Z50FG
		RZ160
		RZ133
		RZ116
		RZ138
		RZ131

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:33Z
Check the source to verify that this is the current version before use.

PIN	Manufacturer's CAGE code	Manufacturer's and user's PIN
1N6518	28527	3131489
	26916	019-006069-007
	91447	194078P9
	14482	711773-020
	60211	RZ117
		Z60UFG
		Z60FG
1N6519	9062	86A0095-2
		86A0095-3
	95542	941-107
	26916	019-006069-008
		019-006069-009
	49956	G333393-2
		G339358
		G339855
	94117	194078P10
		194078P11
	64572	10548305
	14482	711773-025
	60211	RZ163
		RZ183
		Z80UFG
		Z100UFG
		RZ161
		RZ135
		RZ151
		RZ118
		RZ119
		Z80FG
		Z100FG

Custodians:
Army - CR
Navy - EC
Air Force - 17
NASA - NA

Review activities:
Army - AR, AV, SM
Navy - AS, CG, MC, OS
Air Force - 19, 85, 99

Preparing activity:
DLA - CC

(Project 5961-2031)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:33Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.

2. The submitter of this form must complete blocks 4, 5, 6, and 7.

3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	**1. DOCUMENT NUMBER** MIL-PRF-19500/575B	**2. DOCUMENT DATE (YYMMDD)** 981102

3. DOCUMENT TITLE
SEMICONDUCTOR DEVICE, DIODE, SILICON, POWER RECTIFIER, FAST RECOVERY, HIGH VOLTAGE, TYPES 1N6512 THROUGH 1N6519, 1N6512US THROUGH 1N6519US JAN, JANTX, JANTXV, AND JANS

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) Commercial DSN FAX EMAIL	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. Point of contact: Alan Barone	b. TELEPHONE Commercial: 614-692-0510 DSN: 850-0510 FAX: 614-692-6939 EMAIL: alan_barone@dscc.dla.mil
c. ADDRESS: Defense Supply Center Columbus, ATTN: DSCC-VAT, 3990 East Broad Street, Columbus, OH 43216-5000	**IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT:** Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 DSN 289-2340

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:33Z
Check the source to verify that this is the current version before use.