The documentation and process conversion measures necessary to comply with this revision shall be completed by 14 March 2007.

INCH-POUND

MIL-PRF-19500/613B
14 December 2006
SUPERSEDING
MIL-PRF-19500/613A
28 December 1997

PERFORMANCE SPECIFICATION SHEET

SEMICONDUCTOR DEVICE, TRANSISTOR, NPN, SILICON, POWER,
TYPE 2N7373, JAN, JANTX, JANTXV, AND JANS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

* The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-19500.

1. SCOPE

1.1 Scope. This specification covers the performance requirements for NPN, silicon, power transistors for use in high-speed power switching applications. Four levels of product assurance are provided as specified in MIL-PRF-19500.

1.2 Physical dimensions. See figure 1 (TO-254AA).

* 1.3 Maximum ratings.

| Type | $P_T$ (1) $T_A$ = +25°C | $P_T$ (2) $T_C$ = +25°C | $R_{\theta JA}$ | $R_{\theta JC}$ | $V_{CBO}$ | $V_{CEO}$ | $V_{EBO}$ | $I_C$ | $I_C$ (3) | $T_J$ and $T_{STG}$ |
|---|---|---|---|---|---|---|---|---|---|---|
| | W | W | °C/W | °C/W | V dc | V dc | V dc | A dc | A dc | °C |
| 2N7373 | 4 | 58 | 88 | 3 | 100 | 80 | 5.0 | 5.0 | 10 | -65 to +200 |

(1) Derate linearly 22.8 mW/°C for $T_A$ > +25°C.
(2) Derate linearly 331 mW/°C for $T_C$ > +25°C.
(3) This value applies for PW ≤ 8.3 ms, duty cycle ≤ 1percent.

* Comments, suggestions, or questions on this document should be addressed to Defense Supply Center, Columbus, ATTN: DSCC-VAC, P.O. Box 3990, Columbus, OH 43218-3990, or emailed to Semiconductor@dscc.dla.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at http://assist.daps.dla.mil/.

AMSC N/A FSC 5961

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:09Z
Check the source to verify that this is the current version before use.

1.4 Primary electrical characteristics.

| Limit | $h_{FE2}$ | $\|h_{fe}\|$ | $V_{BE(SAT)2}$ (1) | $V_{CE(SAT)2}$ (1) | $C_{obo}$ |
|---|---|---|---|---|---|
| | $V_{CE}$ = 5.0 V dc<br>$I_C$ = 2.5 A dc | $V_{CE}$ = 5.0 V dc<br>$I_C$ = 500 mA dc<br>f = 10 MHz | $I_C$ = 5.0 A dc<br>$I_B$ = 500 mA dc | $I_C$ = 5.0 A dc<br>$I_B$ = 500 mA dc | $V_{CB}$ = 10 V dc<br>$I_E$ = 0 A dc<br>f = 1 MHz |
| | | | V dc | V dc | pF |
| Min | 70 | 7.0 | 2.2 | 1.5 | 250 |
| Max | 200 | | | | |

(1) Pulse (see 4.5.1).

2. APPLICABLE DOCUMENTS

* 2.1 General. The documents listed in this section are specified in sections 3, 4, or 5 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections 3, 4, or 5 of this specification, whether or not they are listed.

2.2 Government documents.

* 2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

* DEPARTMENT OF DEFENSE SPECIFICATIONS

MIL-PRF-19500 - Semiconductor Devices, General Specification for.

* DEPARTMENT OF DEFENSE STANDARDS

MIL-STD-750 - Test Methods for Semiconductor Devices.


* (Copies of these documents are available online at http://assist.daps.dla.mil/quicksearch/ or http://assist.daps.dla.mil/ or from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:09Z
Check the source to verify that this is the current version before use.

| Ltr | Dimensions | | | |
|---|---|---|---|---|
| | Inches | | Millimeters | |
| | Min | Max | Min | Max |
| BL | .535 | .545 | 13.59 | 13.84 |
| CH | .249 | .260 | 6.32 | 6.60 |
| LD | .035 | .045 | 0.89 | 1.14 |
| LL | .53 | .55 | 13.46 | 13.97 |
| LO | .150 BSC | | 3.81 BSC | |
| LS | .150 BSC | | 3.81 BSC | |
| MHD | .139 | .149 | 3.53 | 3.78 |
| MHO | .665 | .685 | 16.89 | 17.40 |
| TL | .790 | .800 | 20.07 | 20.32 |
| TT | .040 | .050 | 1.02 | 1.27 |
| TW | .535 | .545 | 13.59 | 13.84 |
| Term 1 | Base | | | |
| Term 2 | Collector | | | |
| Term 3 | Emitter | | | |

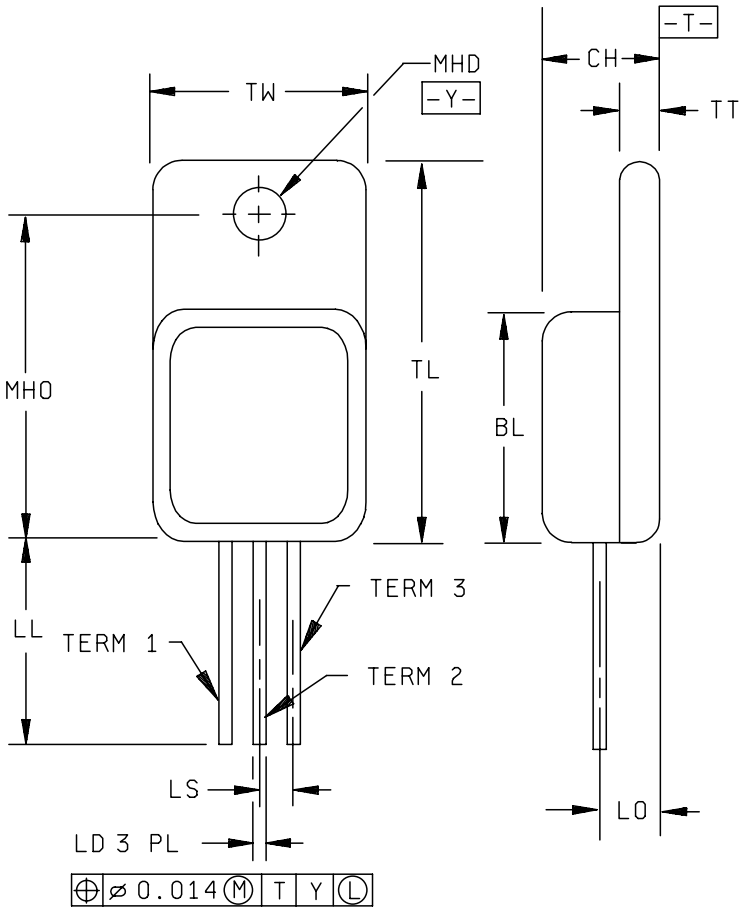


NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. All terminals are isolated from case.
* 4. In accordance with ASME Y14.5M, diameters are equivalent to ϕx symbology.

* FIGURE 1. Dimensions and configuration (TO-254AA).



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:09Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

* 3.1 General. The individual item requirements shall be as specified in MIL-PRF-19500 and as modified herein.

3.2 Qualification. Devices furnished under this specification shall be products that are manufactured by a manufacturer authorized by the qualifying activity for listing on the applicable qualified manufacturers list before contract award (see 4.2 and 6.3).

3.3 Abbreviations, symbols, and definitions. Abbreviations, symbols, and definitions used herein shall be as specified in MIL-PRF-19500.

* 3.4 Interface requirements and physical dimensions. The interface requirements and physical dimensions shall be as specified on figure 1. Methods used for electrical isolation of the terminal feedthroughs shall employ materials that contain a minimum of 90 percent $AL_2O_3$ (ceramic). Examples of such construction techniques are metallized ceramic eyelets or ceramic walled packages.

3.4.1 Lead finish and formation. Lead finish shall be solderable in accordance with MIL-STD-750, MIL-PRF-19500, and herein. Where a choice of lead finish or formation is desired, it shall be specified in the acquisition requirements (see 6.2). When lead formation is performed, as a minimum, the vendor shall perform 100 percent hermetic seal in accordance with table E-IV, screen 14, of MIL-PRF-19500.

3.5 Marking. Marking shall be in accordance with MIL-PRF-19500.

3.6 Electrical performance characteristics. Unless otherwise specified herein, the electrical performance characteristics are as specified in 1.3, 1.4, and table I herein.

3.7 Electrical test requirements. The electrical test requirements shall be as specified in table I.

3.8 Workmanship. Semiconductor devices shall be processed in such a manner as to be uniform in quality and shall be free from other defects that will affect life, serviceability, or appearance.

4. VERIFICATION

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. Qualification inspection (see 4.2).

b. Screening (see 4.3).

c. Conformance inspection (see 4.4).

4.2 Qualification inspection. Qualification inspection shall be in accordance with MIL-PRF-19500.

* 4.2.1 Group E qualification. Group E inspection shall be performed for qualification or re-qualification only. In case qualification was awarded to a prior revision of the specification sheet that did not request the performance of table II tests, the tests specified in table II herein that were not performed in the prior revision shall be performed on the first inspection lot of this revision to maintain qualification.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:09Z
Check the source to verify that this is the current version before use.

* 4.3 Screening ( JANS, JANTX, and JANTXV levels only). Screening shall be in accordance with MIL-PRF-19500, table E-IV, and as specified herein. The following measurements shall be made in accordance with table I herein. Devices that exceed the limits of table I herein shall not be acceptable.

| Screen (see table E-IV of MIL-PRF-19500) | Measurements | |
|---|---|---|
| | JANS level | JANTX and JANTXV levels |
| (1) 3c | Thermal impedance (see 4.3.2) | Thermal impedance (see 4.3.2) |
| 9 | $I_{CES1}$ and $h_{FE2}$ | Not applicable |
| 11 | Subgroup 2 of table I herein; $I_{CES1}$ and $h_{FE2}$; $\Delta_{CES1}$ = 100 percent of initial value or 100 nA dc, whichever is greater. $\Delta h_{FE2}$ = ± 20 percent of initial value. | $I_{CES1}$ and $h_{FE2}$ |
| 12 | t = 160 hours | t = 80 hours minimum |
| 13 | Subgroups 2 and 3 of table I herein; $I_{CES1}$ and $h_{FE2}$; $\Delta I_{CES1}$ = 100 percent of initial value or 100 nA dc, whichever is greater. $\Delta h_{FE2}$ = ±20 percent of initial value. | Subgroup 2 of table I herein; $I_{CES1}$ and $h_{FE2}$; $\Delta I_{CES1}$ = 100 percent of initial value or 100 nA dc, whichever is greater. $\Delta h_{FE2}$ = ±20 percent of initial value. |

(1) Shall be performed anytime after temperature cycling, screen 3a; and does not need to be repeated in screening requirements.

4.3.1 Power burn-in conditions. Power burn-in conditions are as follows: $T_J$ = 187.5 ±12.5°C, $V_{CE} \geq$ 20 V dc, $T_A \leq$ 100°C

* 4.3.2 Thermal impedance. The thermal impedance measurements shall be performed in accordance with method 3131 of MIL-STD-750 using the guidelines in that method for determining $I_M$, $I_H$, $t_H$, $t_{SW}$, (and $V_H$ where appropriate). Measurement delay time ($t_{MD}$) = 70 μs max. See table II, group E, subgroup 4 herein.

4.4 Conformance inspection. Conformance inspection shall be in accordance with MIL-PRF-19500, and as specified herein.

* 4.4.1 Group A inspection. Group A inspection shall be conducted in accordance with table E-V of MIL-PRF-19500, and table I herein.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:09Z
Check the source to verify that this is the current version before use.

* 4.4.2 Group B inspection. Group B inspection shall be conducted in accordance with the conditions specified for subgroup testing in table E-VIa (JANS) and table E-VIb (JAN, JANTX, and JANTXV) of MIL-PRF-19500. Electrical measurements (end-points) shall be in accordance with table I, subgroup 2 herein.

4.4.2.1 Group B inspection, table E- VIA (JANS) of MIL-PRF-19500.

| Subgroup | Method | Condition |
|---|---|---|
| B3 | 2037 | Test condition A |
| B4 | 1037 | $V_{CB}$ = 10 V dc minimum. |
| B5 | 1027 | See 4.5.3. |

* 4.4.2.2 Group B inspection, table E-VIB (JAN, JANTX and JANTXV) of MIL-PRF-19500.

| Subgroup | Method | Condition |
|---|---|---|
| B3 | 1037 | $V_{CB}$ = 10 V dc minimum. |

4.4.3 Group C inspection. Group C inspection shall be conducted in accordance with the conditions specified for subgroup testing in table E-VII of MIL-PRF-19500. Electrical measurements (end-points) shall be in accordance with the applicable steps and table I, subgroup 2 herein.

4.4.3.1 Group C inspection, table E-VII of MIL-PRF-19500.

| | Subgroup | Method | Condition |
|---|---|---|---|
| | C2 | 2036 | Tense: test condition A; weight 10 pounds ± 5 ounces; time 15 seconds.<br>Bend strength: test condition F; bending stress 2 pounds, time 15 seconds. |
| * | C5 | 3131 | See 4.3.2, $R_{\theta JC}$ = 3.0°C/W. |
| | C6 | 1037 | $V_{CB}$ = 10 V dc minimum. |

* 4.4.4 Group E inspection. Group E inspection shall be conducted in accordance with the conditions specified for subgroup testing in table E-IX of MIL-PRF-19500 and table II herein. Electrical measurements (end-points) shall be in accordance with table I, subgroup 2 herein.

4.5 Method of inspection. Methods of inspection shall be as specified in the appropriate tables and as follows:

4.5.1 Pulse measurements. Conditions for pulse measurement shall be as specified in section 4 of MIL-STD-750.

4.5.2 Inspection conditions. Unless otherwise specified in MIL-PRF-19500 or herein, all inspections shall be conducted at a case temperature ($T_C$) of +25°C ±3°C.

4.5.3 Group B accelerated life test. This test shall be conducted using one of the two options listed herein (4.5.3.a and 4.5.3.b) with the following conditions applying to all options: $V_{CB}$ = 20 V minimum dc; 96 hours minimum; $T_J$ = +275°C.

a. $P_T$ = 2.5; $P_T$ adjusted to give a lot average of $T_J$ = +275°C with $T_A$ = +125°C ± 25°C.

b. $T_A$ = +25°C ±3°C with $P_T$ adjusted to give a lot average of $T_J$ = +275°C.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:09Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection.

| Inspection 1/ | MIL-STD-750 | | Symbol | Limits | | Unit |
|---|---|---|---|---|---|---|
| | Method | Conditions | | Min | Max | |
| Subgroup 1 | | | | | | |
| Visual and mechanical examination | 2071 | | | | | |
| Subgroup 2 | | | | | | |
| Thermal impedance | 3131 | See 4.3.2 | $Z_{\theta JX}$ | | | °C/W |
| Collector to emitter breakdown voltage | 3011 | Bias condition D; $I_C$ = 100 mA dc, $I_B$ = 0, pulsed (see. 4.5.1) | $V_{(BR)CEO}$ | 80 | | V dc |
| Collector to emitter cutoff current | 3041 | Bias condition C; $V_{CE}$ = 60 V dc; $V_{BE}$ = 0 | $I_{CES1}$ | | 1.0 | µA dc |
| Collector to emitter cutoff current | 3041 | Bias condition C; $V_{CE}$ = 100 V dc; $V_{BE}$ = 0 | $I_{CES2}$ | | 1.0 | mA dc |
| Collector to emitter cutoff current | 3041 | Bias condition D; $V_{CE}$ = 40 V dc; $I_B$ = 0 | $I_{CEO}$ | | 50 | µA dc |
| Emitter to base cutoff current | 3061 | Bias condition D; $V_{EB}$ = 4 dc; $I_C$ = 0 | $I_{EBO1}$ | | 1.0 | µA dc |
| Emitter to base cutoff current | 3061 | Bias condition D; $V_{EB}$ = 5.5 dc; $I_C$ = 0 | $I_{EBO2}$ | | 1.0 | mA dc |
| Forward-current transfer ratio | 3076 | $V_{CE}$ = 5.0 V dc; $I_C$ = 50 mA dc; pulsed (see 4.5.1) | $h_{FE1}$ | 50 | | |
| Forward-current transfer ratio | 3076 | $V_{CE}$ = 5.0 V dc; $I_C$ = 2.5 A dc; pulsed (see 4.5.1) | $h_{FE2}$ | 70 | 200 | |
| Forward-current transfer ratio | 3076 | $V_{CE}$ = 5.0 V dc; $I_C$ = 5.0 A dc; pulsed (see 4.5.1) | $h_{FE3}$ | 40 | | |
| Base to emitter non-saturated voltage | 3066 | Test condition B; $V_{CE}$ = 5.0 V dc, $I_C$ = 2.5 A dc, pulsed (see 4.5.1) | $V_{BE}$ | | 1.45 | V dc |
| Base to emitter saturated voltage | 3066 | Test condition A; $I_C$ = 2.5 A dc $I_B$ = 250 mA dc, pulsed (see 4.5.1) | $V_{BE(SAT)1}$ | | 1.45 | V dc |
| Base to emitter saturated voltage | 3066 | Test condition A; $I_C$ = 5.0 A dc $I_B$ = 500 mA dc, pulsed (see 4.5.1) | $V_{BE(SAT)2}$ | | 2.2 | V dc |
| Collector to emitter saturated voltage | 3071 | $I_C$ = 2.5 A dc; $I_B$ = 250 mA dc; pulsed (see 4.5.1) | $V_{CE(sat)1}$ | | 0.75 | V dc |
| Collector to emitter saturated voltage | 3071 | $I_C$ = 5.0 A dc; $I_B$ = 500 mA dc; pulsed (see 4.5.1) | $V_{CE(sat)2}$ | | 1.5 | V dc |

See footnote at end of table.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:09Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection - Continued.

| Inspection 1/ | MIL-STD-750 | | Symbol | Limits | | Unit |
|---|---|---|---|---|---|---|
| | Method | Conditions | | Min | Max | |
| Subgroup 3 | | | | | | |
| High-temperature operation: | | $T_A$ = +150°C | | | | |
| Collector to emitter cutoff current | 3041 | Bias condition A; $V_{CE}$ = 60 V dc $V_{BE(OFF)}$ = +2 V dc | $I_{CEX}$ | | 500 | µA dc |
| Low-temperature operation: | | $T_A$ = -55°C | | | | |
| Forward-current transfer ratio | | $V_{CE}$ = 5.0 V dc; $I_C$ = 2.5 A dc; pulsed (see 4.5.1) | $h_{FE4}$ | 25 | | |
| Subgroup 4 | | | | | | |
| Common emitter, small-signal short-circuit forward-current transfer ratio | 3076 | $V_{CE}$ = 5 V dc; $I_C$ = 100 mA dc; f = 1 kHz | $h_{fe}$ | 50 | | |
| Magnitude of common emitter small-signal short-circuit forward-current transfer ratio | 3206 | $V_{CE}$ = 5 V dc; $I_C$ = 500 mA dc; f = 10 MHz | $\|h_{fe}\|$ | 7 | | |
| Open circuit output capacitance | 3236 | $V_{CB}$ = 10 V dc; $I_E$ = 0; 100 kHz ≤ f ≤ 1 MHz | $C_{obo}$ | | 250 | pF |
| Switching time | 3236 | $I_C$ = 5 A dc; $I_{B1}$ = 500 mA dc | $t_{on}$ | | 0.5 | µs |
| | | $I_{B2}$ = -500 mA dc | $t_s$ | | 1.4 | µs |
| | | $V_{BE(off)}$ = 3.7 V dc | $t_f$ | | 0.5 | µs |
| | | $R_L$ = 6 Ω; (see figure 2) | $t_{off}$ | | 1.5 | µs |

See footnote at end of table.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:09Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection - Continued.

| Inspection 1/ | MIL-STD-750 | | Symbol | Limits | | Unit |
|---|---|---|---|---|---|---|
| | Method | Conditions | | Min | Max | |
| Subgroup 5 | | | | | | |
| Safe operating area (continuous dc) | 3055 | Pre-pulse condition for each test: $V_{CE}$ = 0; $I_C$ = 0; $T_C$ = +25°C<br><br>Pulse condition for each test: $t_p$ = 1 second, 1 cycle<br>$T_C$ = +25°C, (see figure 3) | | | | |
| Test 1 | | $V_{CE}$ = 12 V dc; $I_C$ = 5 A dc | | | | |
| Test 2 | | $V_{CE}$ = 32 V dc; $I_C$ = 1.5 A dc | | | | |
| Test 3 | | $V_{CE}$ = 80 V dc; $I_C$ = 100 mA dc | | | | |
| Safe operating area (unclamped inductive) | | $T_C$ = +25°C; $R_{BB1}$ = 10 ohms; $R_{BB2}$ = 100 ohms; L = 0.3 mH; $R_L$ = 0.1 ohms; $V_{CC}$ = 10 V dc; $R_L$ = 0.1 ohms; $V_{CC}$ = 10 V dc; $I_{CM}$ = 10 A dc; (see figure 4) | | | | |
| Electrical measurements | | Table I, group A, subgroup 2 | | | | |
| Subgroups 6 and 7 | | | | | | |
| Not applicable | | | | | | |

1/ For sampling plan, see MIL-PRF 19500.




Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:09Z
Check the source to verify that this is the current version before use.

* TABLE II. Group E inspection (all quality levels) - for qualification and re-qualification only.

| Inspection | MIL-STD-750 | | Sample plan |
|---|---|---|---|
| | Method | Conditions | |
| Subgroup 1 | | | 45 devices<br>c = 0 |
| Temperature cycling | 1051 | 500 cycles. | |
| Hermetic seal | 1071 | | |
| Fine leak<br>Gross leak | | | |
| Electrical measurements | | See table I, subgroup 2 herein. | |
| Subgroup 2 | | | 45 devices<br>c = 0 |
| Blocking life | 1048 | Test temperature = +125°C; $V_{CB}$ = 80 percent rated; T = 1,000 hours. | |
| Electrical measurements | | See table I, subgroup 2 herein. | |
| Subgroup 4 | | | Sample size<br>N/A |
| Thermal impedance curves | | See MIL-PRF-19500. | |
| Subgroup 6 | | | 3 devices |
| ESD | 1020 | Testing is not required for class 3 listing. Testing is required for a nonsensitive listing to prove capability. | |
| Subgroup 8 | | | 45 devices<br>c = 0 |
| Reverse stability | 1033 | Condition B. | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:09Z
Check the source to verify that this is the current version before use.

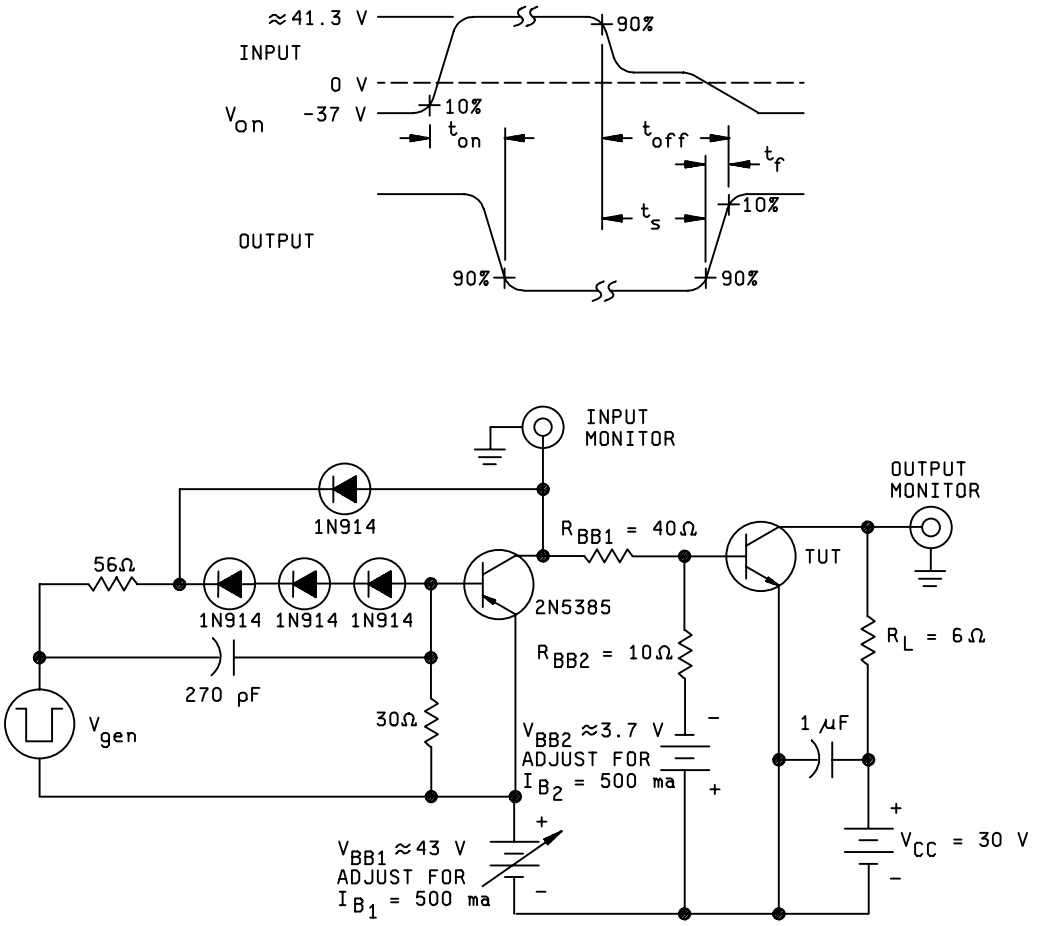


NOTES:

1. $V_{gen}$ is -30 pulse (from 0 V) into a 50 ohm termination.
2. The $V_{gen}$ waveform is supplied by a generator with the following characteristics: $t_r \leq 15$ ns, $t_f = 15$ ns, $Z_{OUT} = 50$ ohm, duty cycle $\leq 2$ percent.
3. Waveforms are monitored on an oscilloscope with the following characteristics: $t_r \leq 15$ ns, $R_{IN} \geq 10$ MΩ, $C_{IN} \leq 11.5$ pF.
3. Resistors shall be noninductive types.
4. The dc power supplies may require additional bypassing in order to minimize ringing.

FIGURE 2. Switching time test circuit.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:09Z
Check the source to verify that this is the current version before use.

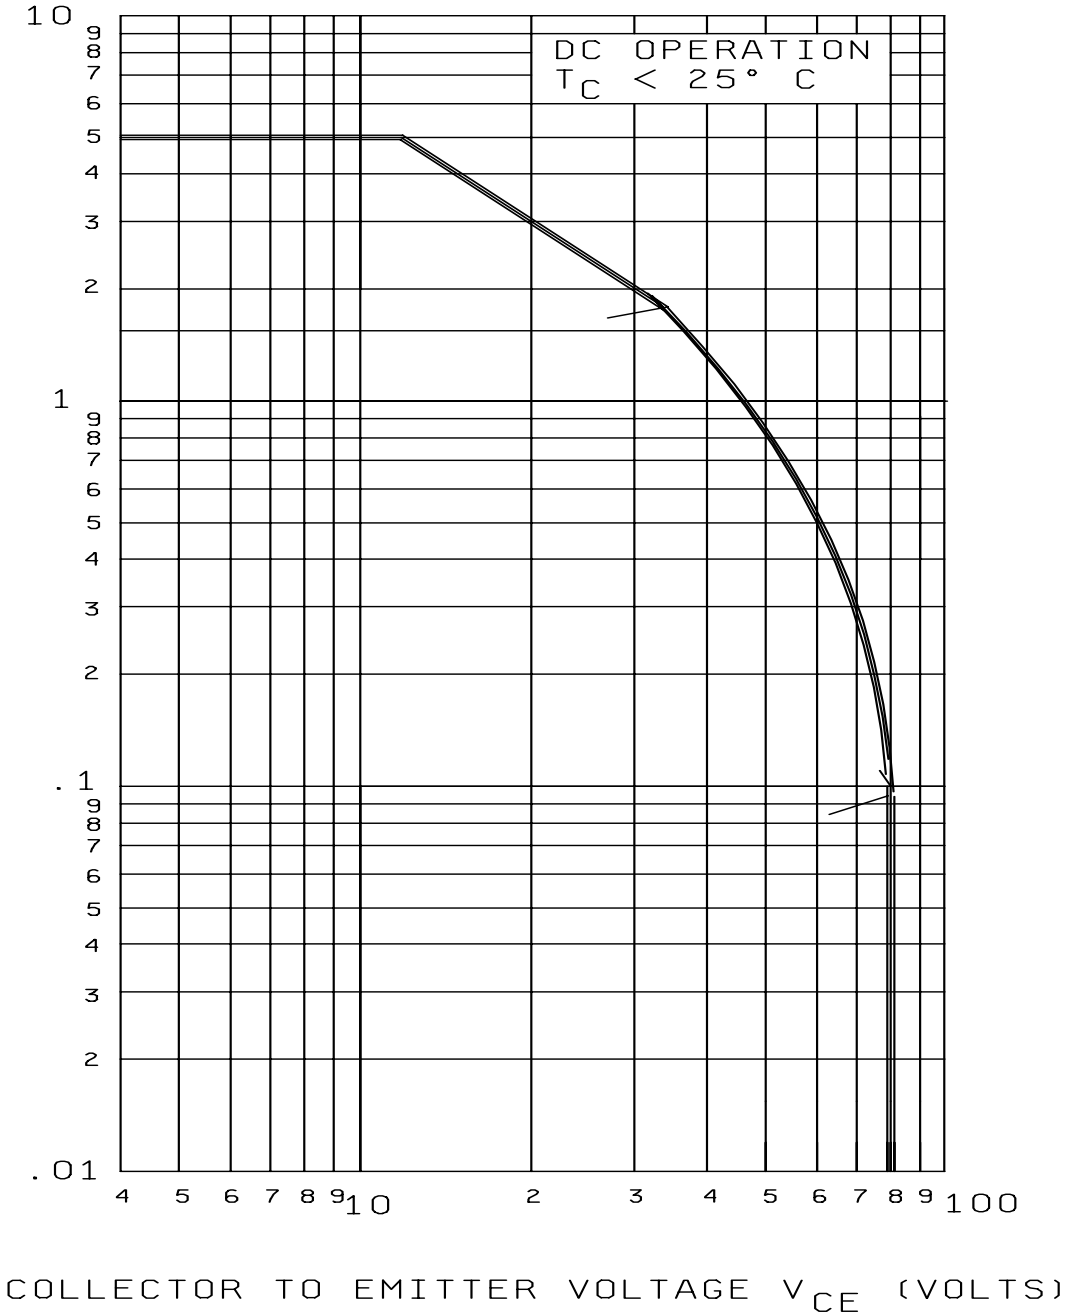



FIGURE 3. Maximum safe operating area.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:09Z
Check the source to verify that this is the current version before use.

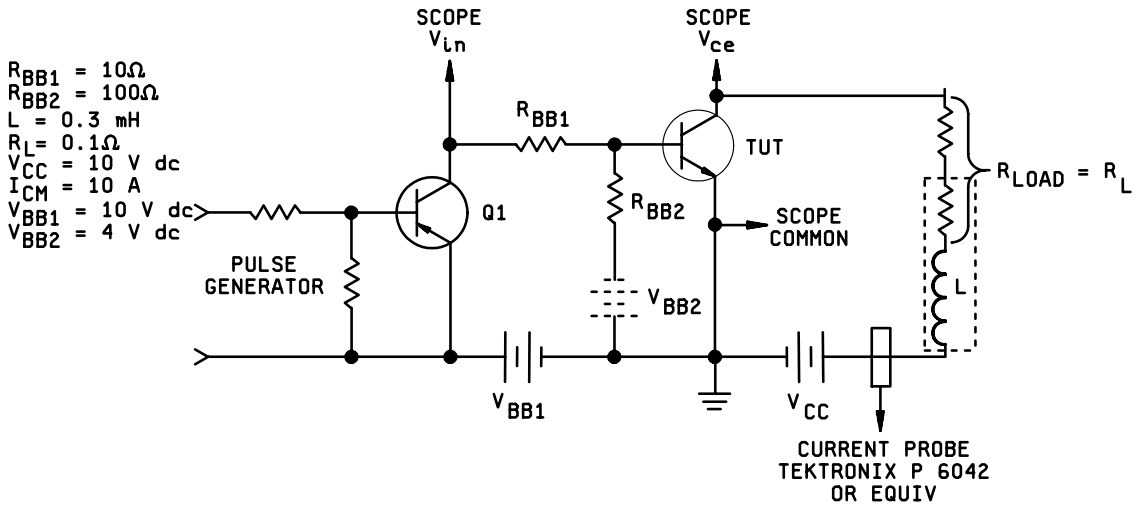



FIGURE 4. Unclamped inductive load energy test circuit.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:09Z
Check the source to verify that this is the current version before use.

5. PACKAGING

* 5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When packaging of materiel is to be performed by DoD or in-house contractor personnel, these personnel need to contact the responsible packaging activity to ascertain packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activities within the Military Service or Defense Agency, or within the Military Service's system commands. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The notes specified in MIL-PRF-19500 are applicable to this specification.

* 6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.

b. Packaging requirements (see 5.1).

c. Lead finish (see 3.4.1).

d. Product assurance level and type designator.

* 6.3 Qualification. With respect to products requiring qualification, awards will be made only for products which are, at the time of award of contract, qualified for inclusion in Qualified Manufacturers List (QML 19500) whether or not such products have actually been so listed by that date. The attention of the contractors is called to these requirements, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be eligible to be awarded contracts or orders for the products covered by this specification. Information pertaining to qualification of products may be obtained from Defense Supply Center, Columbus, ATTN: DSCC/VQE, P.O. Box 3990, Columbus, OH 43218-3990 or e-mail vqe.chief@dla.mil.

6.4 Interchangeability information. MIL-PRF-19500/613 is a TO-254 package version of MIL-PRF-19500/534, which is a TO-210 (TO-59) package version. The military 2N7373 contains the same die as the military 2N5004. The MIL-PRF-19500/613 is preferred over the MIL-PRF-19500/534 whenever interchangeability is not a problem. For new design use 2N7373. The 2N5004 is inactive for new design.

* 6.5 Changes from previous issue. The margins of this specification are marked with asterisks to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:09Z
Check the source to verify that this is the current version before use.

Custodians:
Army - CR
Navy - EC
Air Force - 11
NASA - NA
DLA - CC

Review activities:
Army - AR, MI, SM
Navy - AS, MC
Air Force - 19, 99

Preparing activity:
DLA - CC

(Project 5961-2006-082)

* NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil/ .



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:09Z
Check the source to verify that this is the current version before use.